

U Band (40-60GHz) Down-Converter, NF Test and General Receiver, WR-19

2022-9-1



Product Overview

AT-BTDC-4060 is full U Band down-converter with X4 frequency multiplier inside. The down converter RF-IF gain is 20dB with IF amplifier.

The down-converter can be used for NF test and general receiver application. The RF Port is with standard WR-19. LO input port and IF Output port are SMA Female. AT Microwave provides full band down-converter from U band to D Band.

More information, please visit www.atmicrowave.com


Advantages

- ✓ Frequency: 40-60GHz
- ✓ Gain: 20dB
- ✓ IF: 50kHz-20GHz
- ✓ LO Input: 10-15GHz, +3dBm
- ✓ Bench-Top Labs Test

Application

- ✓ Noise Figure Test
- ✓ 5G Communication
- ✓ ROF (RF Over Fiber)
- ✓ Radar System
- ✓ RCS Test

Diagram Block:

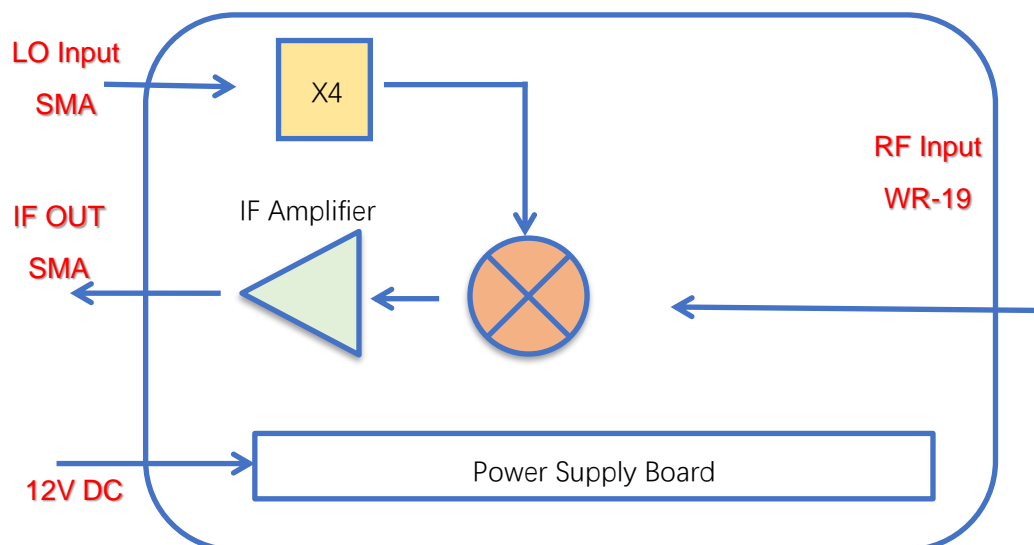



AT-BTDC-4060

Bench-Top U Band Down-Converter

Key Features

Parameter	Min	Typical	Max
RF Frequency	40GHz		60GHz
LO Frequency	10GHz		15GHz
LO Multiplier Factor		X4	
LO Driver	+0	+3dBm	+5dBm
IF Frequency		50kHz-20GHz	
RF-IF Gain (IF=100MHz)		20dB	
RF Input P1dB		+8dBm	
Noise Figure		12dB	18dB
RF Input Return Loss		-8dB	
IF Output Return Loss		-10dB	
Power Supply (with AC/DC Adapter)	+90V	+220V	+240V
Spec Temp		25C	

Mechanical Information:

Parameter	Value
RF Port	WR-19
LO/IF Port	SMA Female
DC Bias	+12V Supply, AC to DC Power Converter included
DC Bias Switch	ON-OFF switch with light indicator
Dimension	See outline

Absolute Maximum Ratings Table


Parameter	Value
AC Supply	+260V
RF Input Power	+15dBm
LO Port Power	+15dBm
Operating Temperature	0 to 50 C
Storage Temperature	-65 to +150C



Shanghai AT Microwave Limited
Tel:021-6229 1233 sales@atmicrowave.com
www.atmicrowave.com



Dimension: (mm)

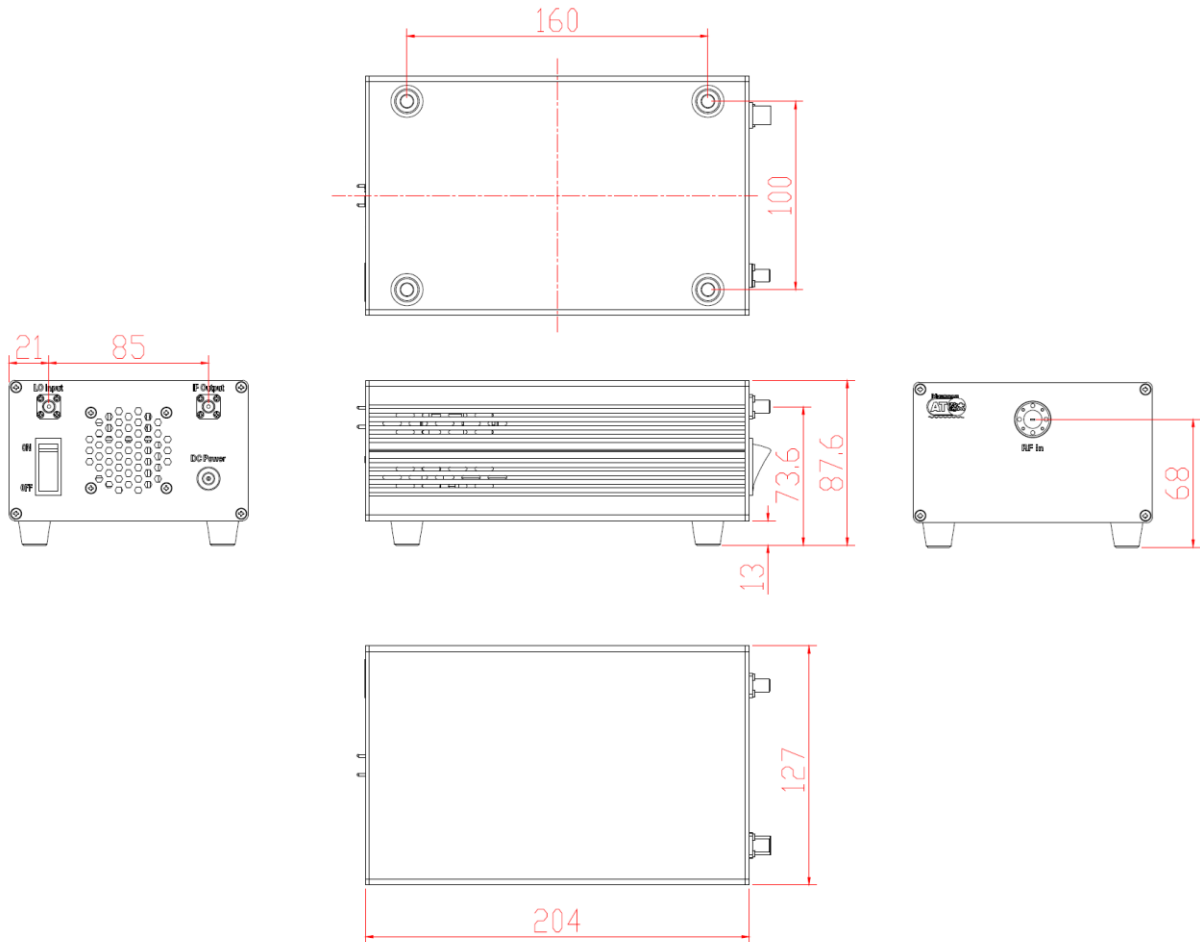

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.

