

AT-BTUC16L-190230

Bench-Top 190-230GHz Up-Converter

190-230GHz Up-Converter, X16 on LO line Bench-top Test Equipment, WR-04



Product Overview

AT-BTUC16L-190230 is 190-230GHz Up-converter with X16 frequency multiplier inside. The Up converter IF-RF conversion loss is -12dB.

The RF Port is with standard WR-04. LO input port and IF input port are SMA Female. Please note there will be both up and low band for the mixer. AT Microwave provides many kinds of filters if only one side is needed.

PDRO, Band Pass filter and Power amplifier can be integrated internally or externally according to request.

More information, please contact sales@atmicrowave.com


Advantages

- ✓ Frequency: 190-230GHz
- ✓ Low Loss: -12dB
- ✓ IF: DC-20GHz
- ✓ LO X16 inside
- ✓ Bench-Top Labs Test

Application

- ✓ 5G Communication
- ✓ ROF (RF Over Fiber)
- ✓ Radar System
- ✓ RCS Test

Diagram Block:

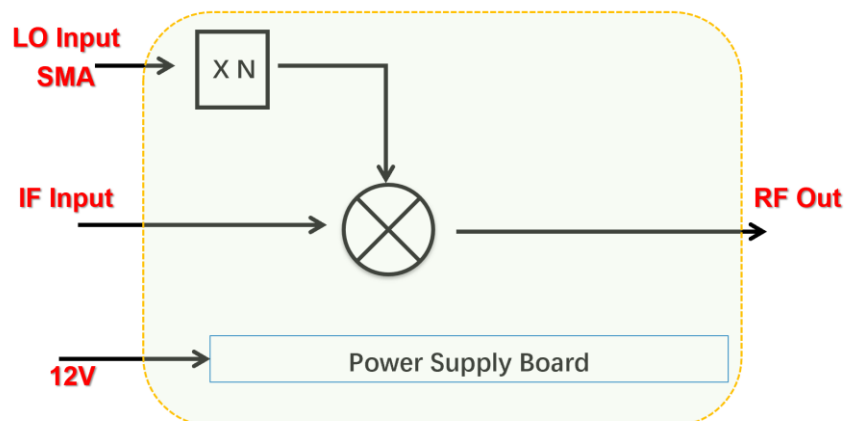


Shanghai AT Microwave Limited

Tel:021-6229 1233 sales@atmicrowave.com

www.atmicrowave.com





AT-BTUC16L-190230

Bench-Top 190-230GHz Up-Converter

Key Features

Parameter	Min	Typical	Max
RF Frequency	190GHz		230GHz
16XLO Frequency	190GHz		230GHz
LO Frequency	11.875GHz		14.375GHz
LO Driver	+3dBm	+5dBm	+8dBm
LO Multiplier Factor		X8	
Mixer Type		Sub-harmonics Mixer	
IF Frequency		DC-20GHz	
IF-RF Gain		-12dB	-15dB
IF Port Input P1dB		0dBm	
LO Port Return Loss		-10dB	
IF Port Return Loss		-10dB	
Power Supply (with AC/DC Adapter)	+90V	+220V	260V
Spec Temp		25C	



Shanghai AT Microwave Limited
Tel:021-6229 1233 sales@atmicrowave.com
www.atmicrowave.com





AT-BTUC16L-190230

Bench-Top 190-230GHz Up-Converter

Mechanical Information:

Parameter	Value
RF Port	WR-04
LO/IF Port	SMA Female
DC Bias	+12V Supply, AC to DC Power Converter included
DC Bias Switch	ON-OFF switch with light indicator
Dimension	See outline

Absolute Maximum Ratings Table

Parameter	Value
AC Supply	+260V
IF Input Power	+7dBm
LO Port Power	+18dBm
Operating Temperature	0 to +50 C
Storage Temperature	-40to +85C

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



Shanghai AT Microwave Limited
Tel:021-6229 1233 sales@atmicrowave.com
www.atmicrowave.com



Application Note

Mixer is a three ports component with RF, LO and IF ports. Normally, a mixer can be used both up and down converter application. Take up converter for example:

General Balance Mixer

For general balance mixer, $RF = LO \pm IF$. There will be both high end $LO + IF$ and Low End $LO - IF$. Take for example, $IF = 2\text{GHz}$, $LO = 140\text{GHz}$, so there will be 138GHz and 142GHz at RF port with same power level.

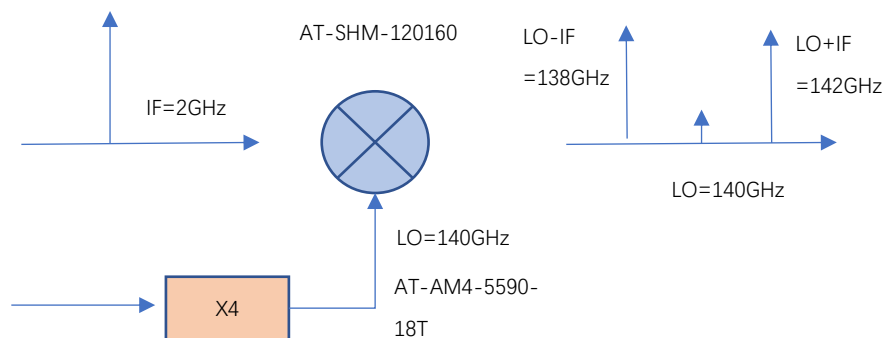


Figure A: General Balance Mixer with Both High and Low Side Output

IQ Mixer used as side suppression Mixer

When $IF = 2\text{GHz}$, 90 degree hybrid is used at IF port, when IF applies to Input 1 Port of hybrid, you will have high end frequency $RF = LO + IF = 142\text{GHz}$, while have side suppression (say -15dBc) at Low end frequency 138GHz .

When you need low end frequency 138GHz , and make side suppression for high end frequency 142GHz , just applies IF to Input 2 of the hybrid.


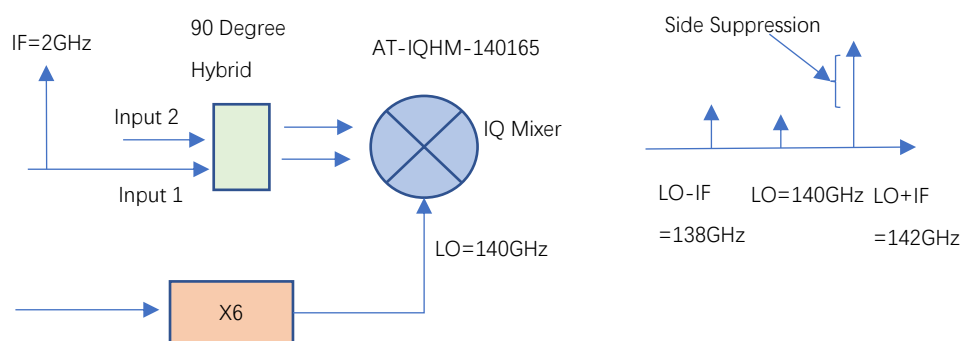


Figure B: IQ Mixer works as side suppression mixer






AT-BTUC16L-190230

Bench-Top 190-230GHz Up-Converter

Dimension: (mm)

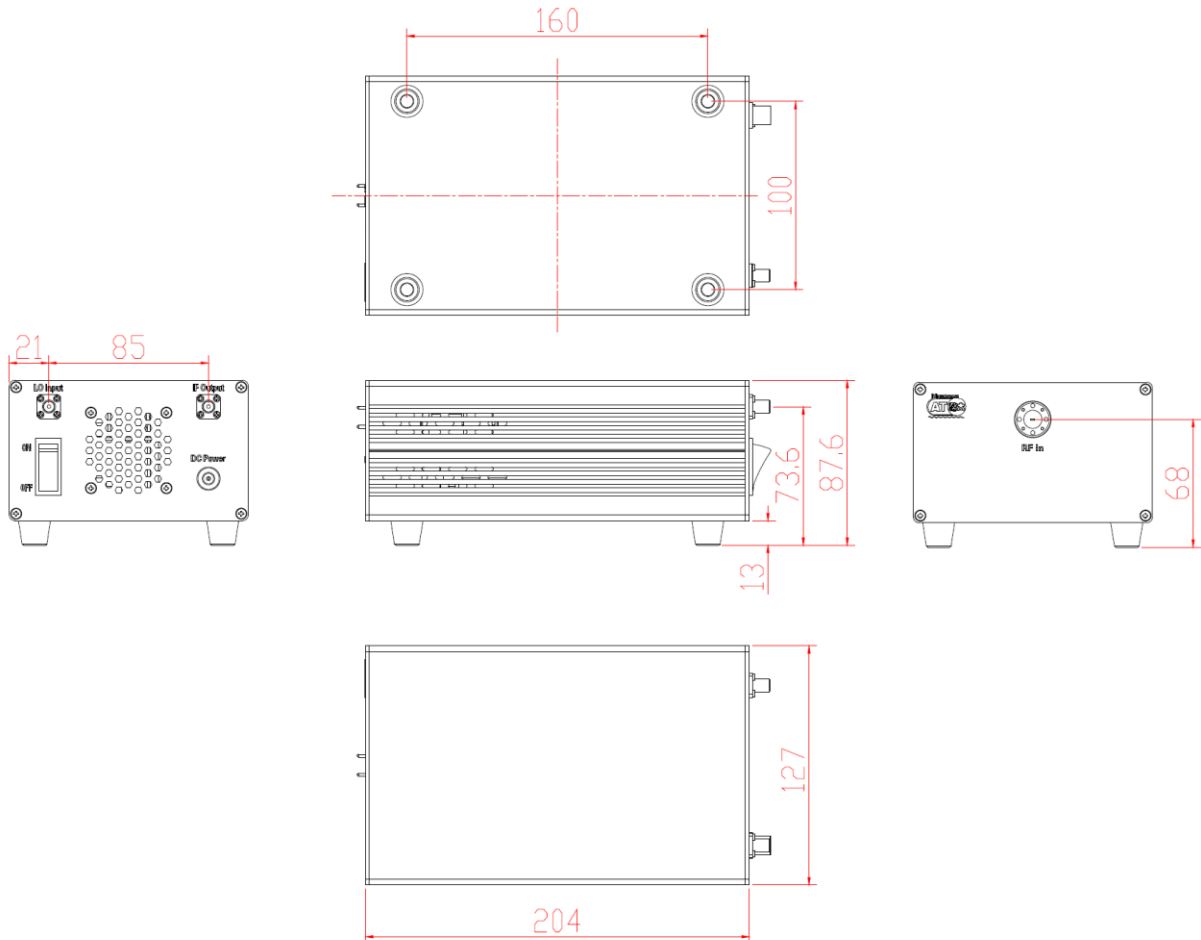

Shanghai AT Microwave Limited
Tel: 021-6229 1233 sales@atmicrowave.com
www.atmicrowave.com

