

6-18GHz GaAs High Power Amplifier



Product Overview

AT-HPA-0618-3235N is GaAs Based high gain power amplifier with +35dBm output power in the frequency of 6-18GHz. The DC power requirement is +10V/2.9A at Psat. The module is with SMA connector.

The power amplifier has high gain, high linearity, low input/output return loss and flat gain response. There is no heatsink and fan in default. Option with suffix "-HF" is part number with heatsink and Fan.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 6-18GHz
- ✓ Psat:+35dBm
- ✓ Small signal gain: 35dB
- ✓ Single Power Supply

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency		6-18GHz	
Gain	30	32dB	
P1dB		+33dBm	
Psat		+35dBm	
Drain Supply	+9V	+10V	+12V
IDD PSAT		2.9A	3.5A
Input Return Loss		-10dB	
Output Return Loss		-5dB	
Spec Temp		25C	



Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	SMA Female
Case Material	Copper
Finish	Gold Plated
Weight (With Heatsink and Fan)	400g
Size:	65x20x14mm

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+15V
RF Input Power	+20 dBm
Operating Temperature	-20 to +55C
Storage Temperature	-65 to +150C


Very Important:

1. MUST Apply to heatsink and Fan during operation, or the amplifier will be damaged due to the high power consumption;
2. Do NOT leave Output OPEN with Bias and input power. Connect to 50 Ohms system during operation.
3. Take care that Vdd never touch Case/GND when Power ON, or the amplifier will be damaged.




Part Number Selection

Item	Description
AT-HPA-0618-3235N	In defaulted without heatsink and Fan. Heatsink and Fan required during operation.
AT-HPA-0618-3235N-HF	Including Heatsink and Fan. Fan bias is connected with PA Module's Vdd supply

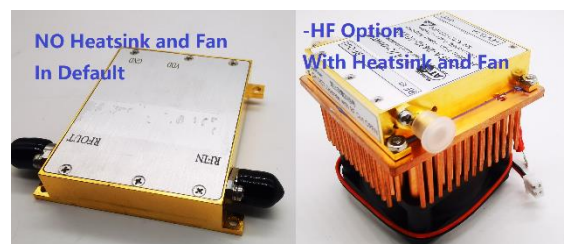


Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

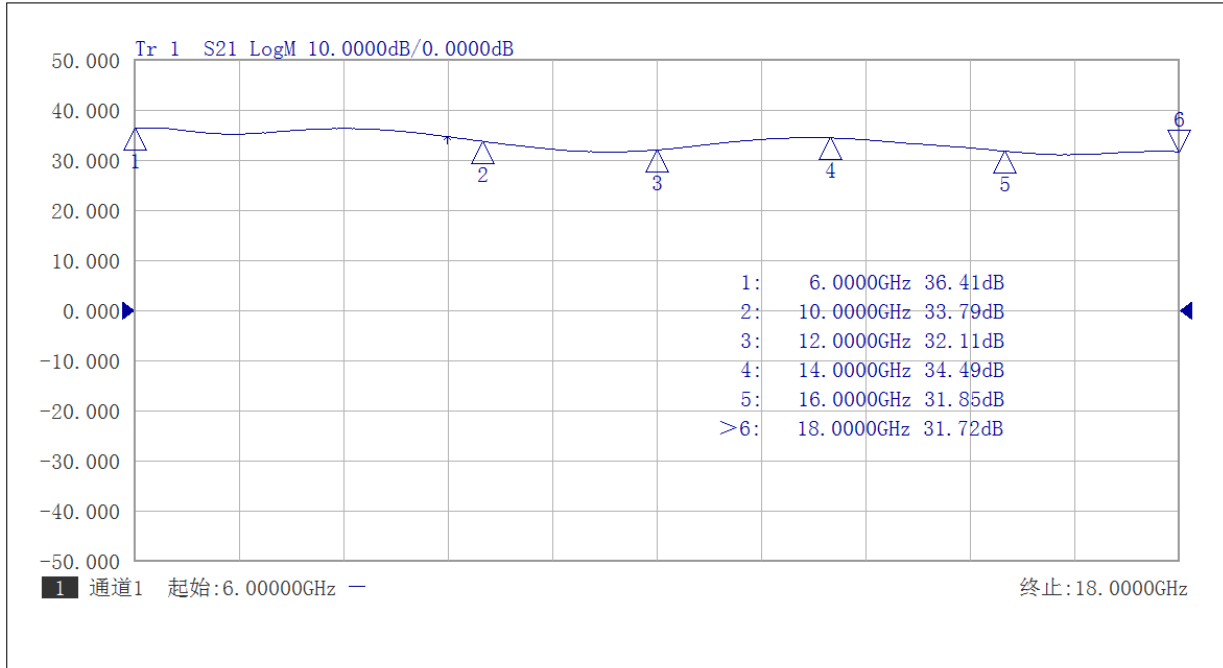


Gain vs Frequency

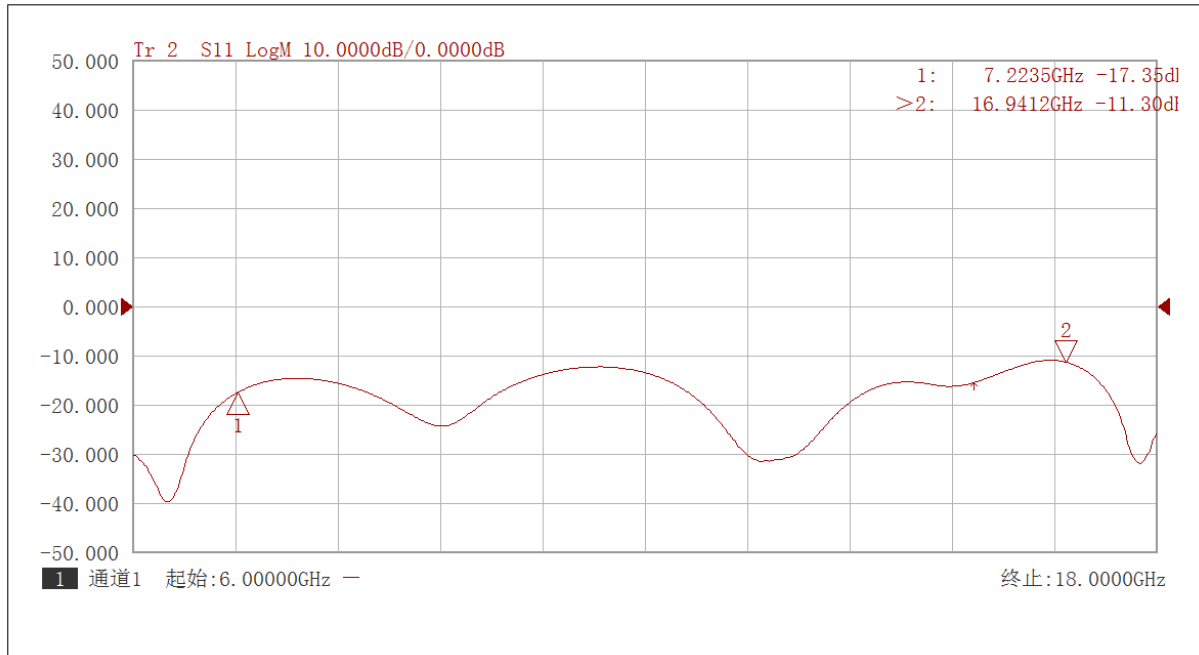


Input Return Loss vs Frequency



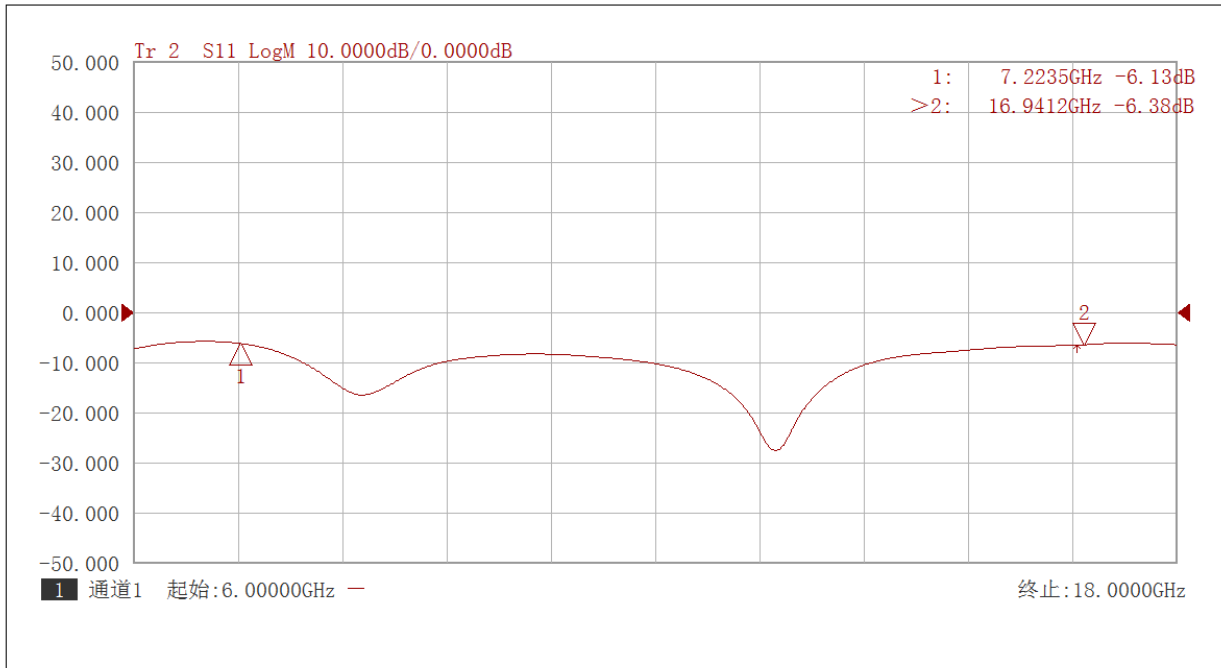


Output Return Loss vs Frequency

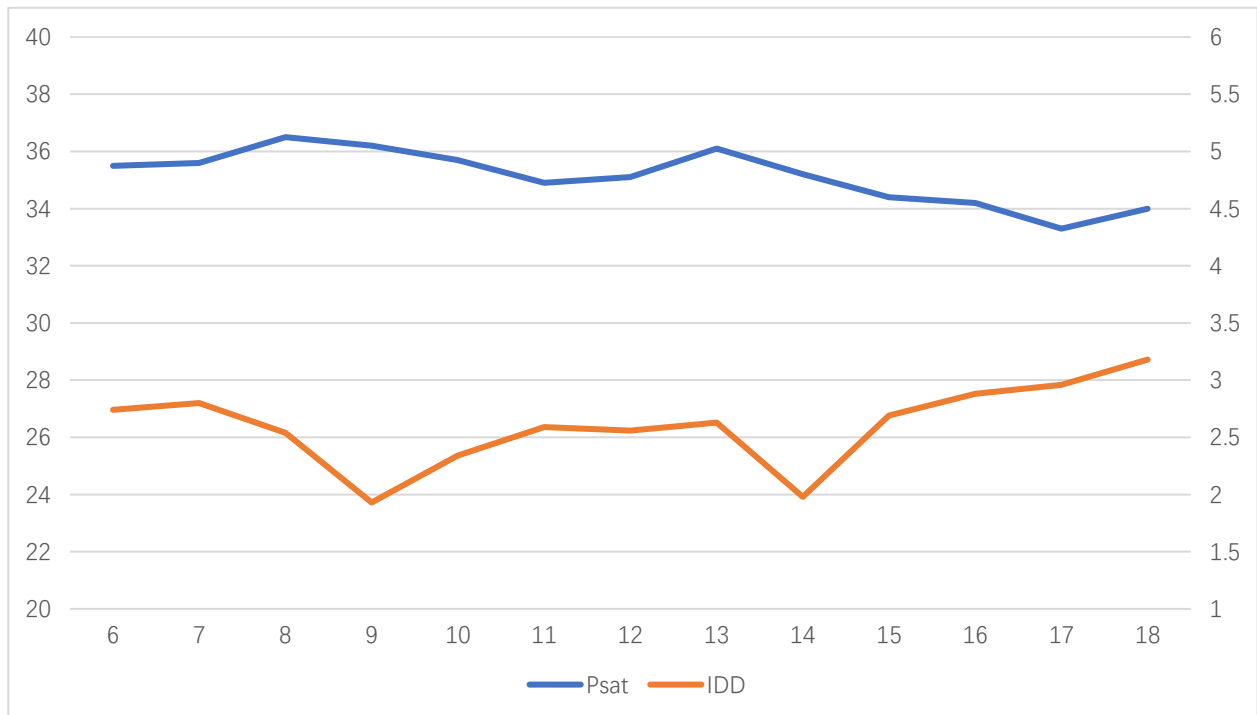


Psat and IDD vs Frequency, Pin=+6dBm



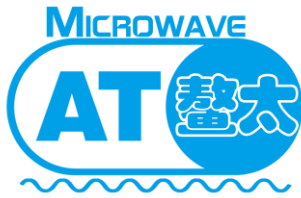

AT-HPA-0618-3235N


6-18GHz High Power Amplifier

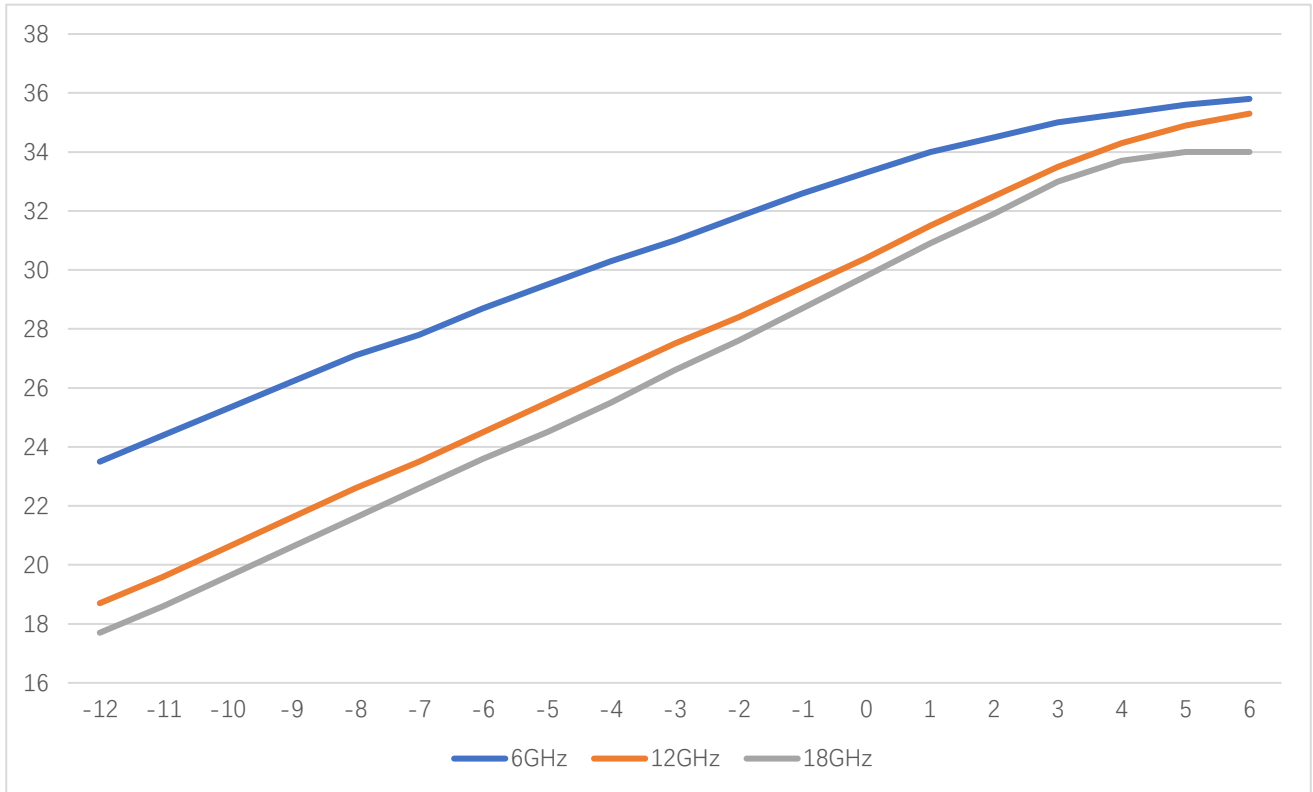

Pout vs Pin at 6/12/18GHz



Dimension: (mm)

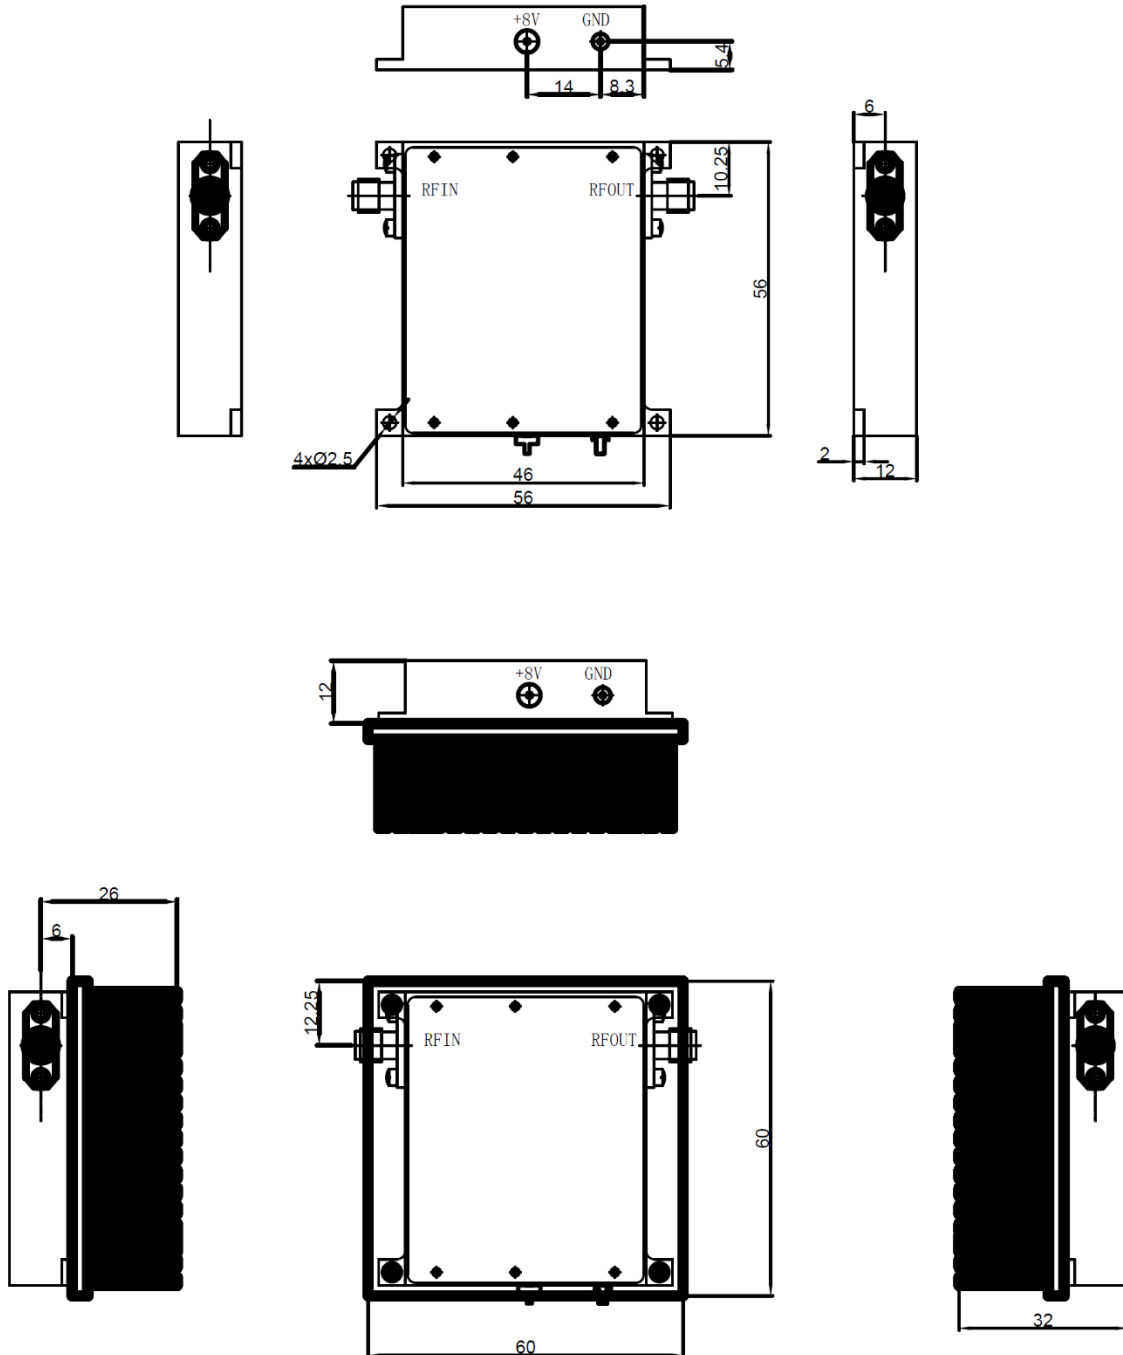

Heat Sink Required during Operation

