




AT-AM3-3350-23L

Active Multiplier x3, 33-50GHz Pout=+23dBm

Full Q Band X3 Active Multiplier

2023-5-7

Pout=+23dBm, Low Input Power, WR-22

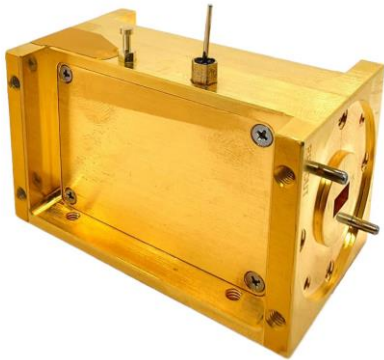

Description:

AT-AM3-3350-23L is a full Q band, active x3 frequency multiplier with low input power. The multiplier has an input frequency of 11-16.66 GHz with a typical output +23dBm from 33-50GHz.

The integrated input and output buffers deliver high output power at a low drive level. The multiplier also has a typical harmonic suppression of -20dBc. The input port is SMA female, and the output is a WR-22 waveguide. Other port configurations are available under different requirement.

More information, please visit www.atmicrowave.com

Feature

- ✓ Frequency: 33-50GHz
- ✓ Pout: +23dBm typical
- ✓ Input: 11-16.66GHz, +3dBm
- ✓ Low Harmonics

Application

- ✓ Q band Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Electronical Specifications:

Parameter	Min	Typical	Max
Input Frequency		8.25-12.5GHz	
Input Power	0dBm	+3dBm	+7
Multiplier Factor		X3	
Output Frequency	33GHz		50GHz
Output Power	+20 +18dBm	33-45GHz: +23dBm 45-50GHz: +21dBm	
X2/X4 Harmonic Suppression		-30dBc	
Drain Voltage		+5V	+8V
Current/A		0.4A	
Spec Temp		25C	

Shanghai AT Microwave Limited

Tel:021-6229 1233

Email:sales@atmicrowave.com

www.atmicrowave.com





AT-AM3-3350-23L

Active Multiplier x3, 33-50GHz Pout=+23dBm

Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	WR-22 Waveguide with UG-383/U
Case Material	Copper
Finish	Gold Plated
Weight	190g
Size:	See outline


Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+9V
RF Input Power	+15dBm
Operating Temperature	0 to +50C
Storage Temperature	-45 to +85C

Notes:

- ✓ Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
- ✓ This data is only for reference, not for guaranteed specifications.
- ✓ Please contact AT Microwave team to make sure you have the most current data.
- ✓ Always pay attention to the temperature of the case, heatsink and fan are required if case temperature exceeds over 50C.



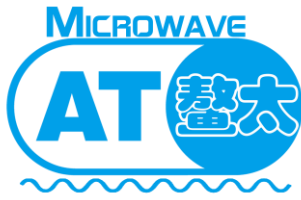


AT-AM3-3350-23L

Active Multiplier x3, 33-50GHz Pout=+23dBm

Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

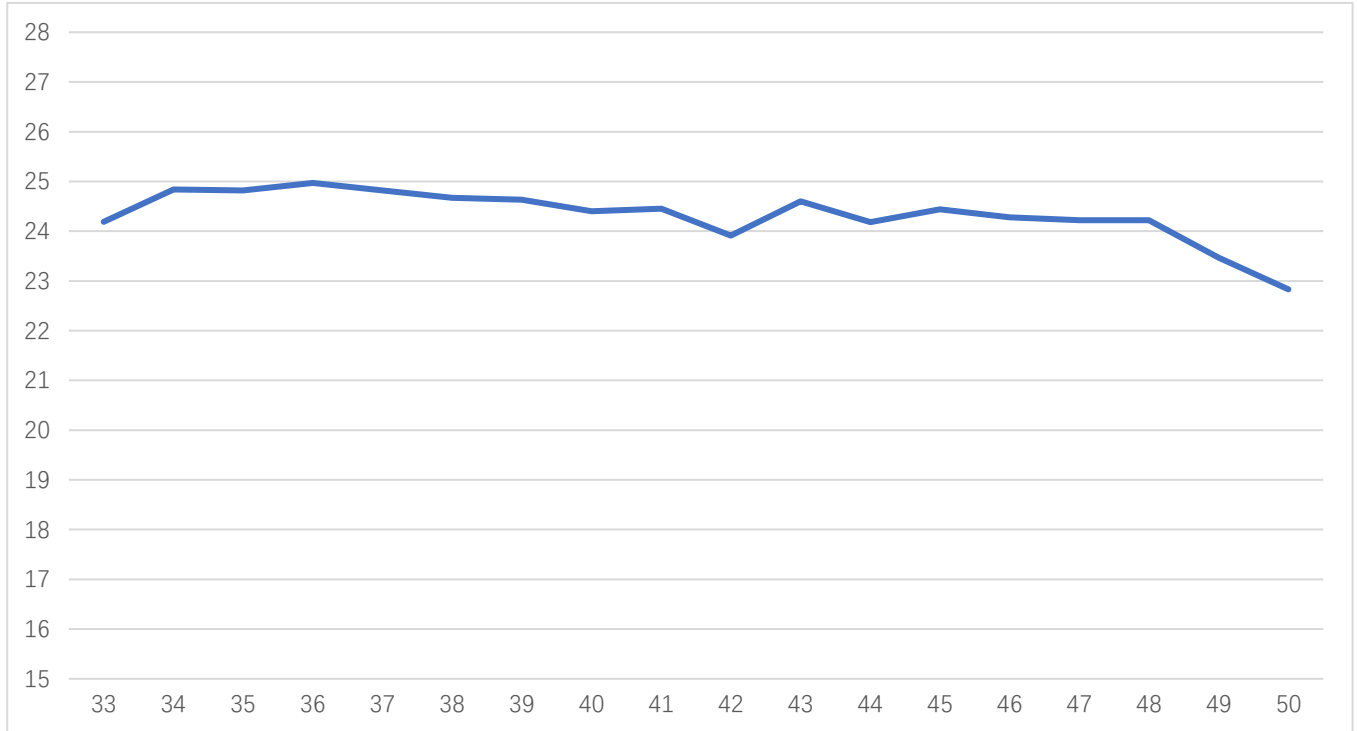

Pout vs Frequency





AT-AM3-3350-23L

Active Multiplier x3, 33-50GHz Pout=+23dBm

Dimension:(unit: mm)

