

## Active X4, 20-60GHz Broadband, Pout=+13dBm, 1.85mm



### Description:

AT-AM4-2060-13 is a broadband frequency multiplier. The multiplier has an input frequency of 8.75-16.75 GHz with a typical output +13dBm from 20-60GHz.

The integrated input and output buffers deliver high output power at a low drive level. The multiplier also has a typical harmonic suppression. The input port is SMA female, and the output is 1.85 mm Female. Other port configurations are available under different requirement.

For more information, please visit [www.atmicrowave.com](http://www.atmicrowave.com)

### Feature

- ✓ Frequency: 20-60GHz
- ✓ Pout: +13dBm typical
- ✓ Input: 5-15GHz
- ✓ Low Harmonics

### Application

- ✓ 28/39GHz 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

### Electronical Specifications:

Parameter	Min	Typical	Max
Input Frequency	5GHz		15GHz
Input Power	+13dBm	+15dBm	+18
Multiplier Factor		X4	
Output Frequency	20GHz		60GHz
Output Power	+9	+13dBm	
X3/X5 Suppression vs X4 Pout		-20dBc	
Drain Voltage		+5V	+8V
Current		200mA	
Spec Temp		25C	





# AT-AM4-2060-13

Active Multiplier x4, 20-60GHz Pout=+13dBm

## Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	1.85mm Female
Case Material	Copper
Finish	Gold Plated
Package Sealing	Epoxy Sealed
Weight (Without Heatsink)	80g
Size:	45x34x8.5mm

## Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+13V
RF Input Power	+20dBm
Operating Temperature	-20 to +70C
Storage Temperature	-65 to +130C

**Note:** -40 to 85C operating Temp range is available according to request.

### Notes:

- ✓ Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
- ✓ This data is only for reference, not for guaranteed specifications.
- ✓ Please contact AT Microwave team to make sure you have the most current data.

## Part Number Selection Guide

Item	Description
PN	Stand Module with DC Power Supply
<b>PN-LCBT</b>	<b>L</b> ow Cost, <b>C</b> ompact <b>B</b> ench- <b>T</b> op, +220V Supply with AC/DC Adapter







# AT-AM4-2060-13

Active Multiplier x4, 20-60GHz Pout=+13dBm

## Test Data:

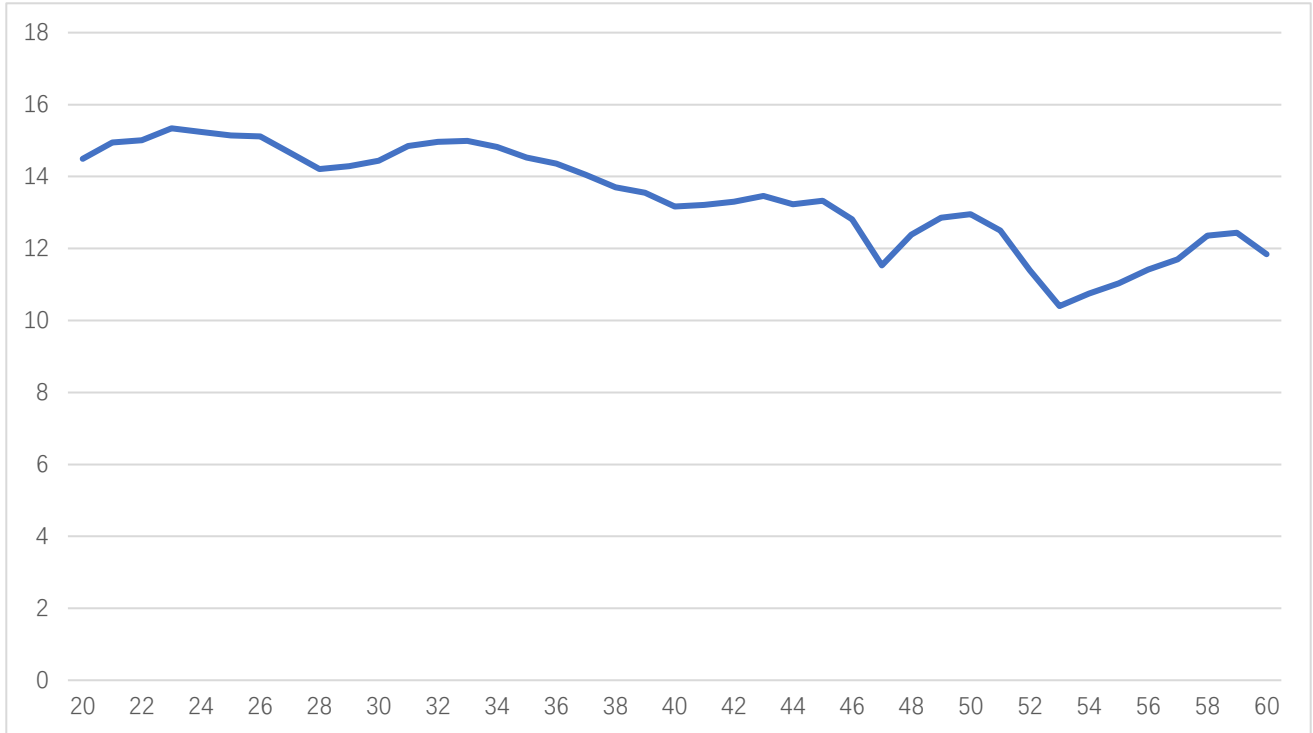



Pout vs Frequency Pin=+15dBm

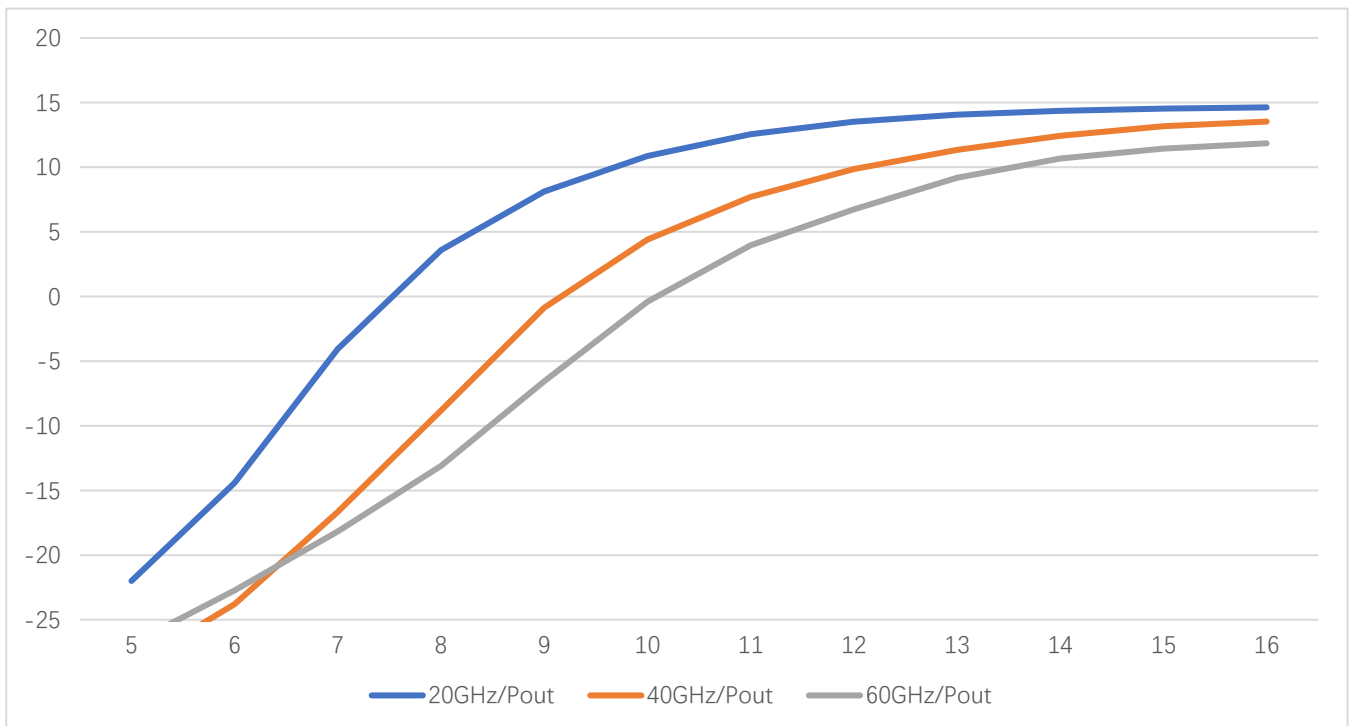

Pout vs Pin at 20/40/60GHz



**Dimension:** (Unit:mm)

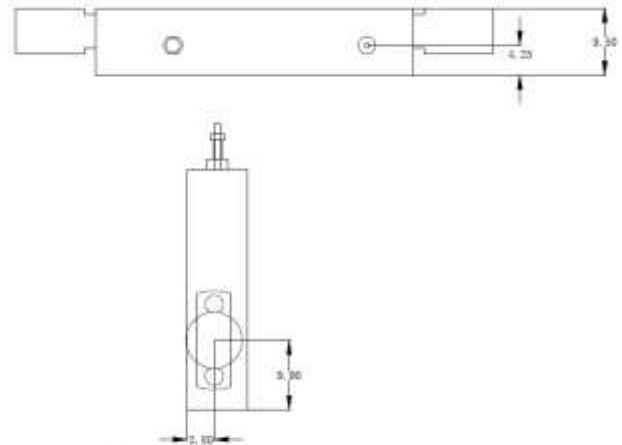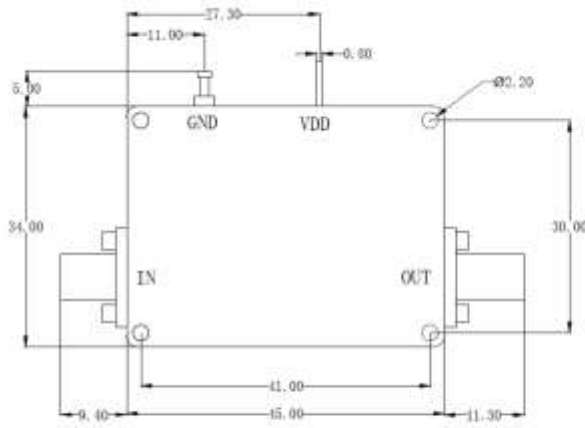

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Length of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

