



AT-AM6-6090-12L

Active Multiplier x6, 60-90GHz Pout=+12dBm

E Band, X6 Active Multiplier 60-90GHz, Pout=+12dBm, WR-12



Description:

AT-AM6-6090-12L is a full E band, active x6 frequency multiplier with low input power. The multiplier has an input frequency of 10-15 GHz with a typical output +12dBm from 60-90GHz.

The integrated input and output buffers deliver high output power at a low drive level. The multiplier also has a typical harmonic suppression. The input port is SMA female, and the output is WR-12. Other port configurations are available under different requirement.

More information, please visit www.atmicrowave.com

Feature

- ✓ Frequency: 60-90GHz
- ✓ Pout: +12dBm typical
- ✓ Input: 10-15GHz, +0dBm
- ✓ Low Harmonics

Application

- ✓ E band Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Electronical Specifications:

Parameter	Min	Typical	Max
Input Frequency	10GHz		15GHz
Input Power	-3dBm	+0dBm	+5dBm
Multiplier Factor		X6	
Output Frequency	60GHz		90GHz
Output Power	+10dBm	+12dBm	
X5/X7 Harmonic Suppression		-25dBc	
Drain Voltage		+5V	+8V
Current		0.35A	
Spec Temp		25C	





AT-AM6-6090-12L

Active Multiplier x6, 60-90GHz Pout=+12dBm

Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	WR-12 Waveguide with UG-387/U anti-cocking Flange
Case Material	Copper
Finish	Gold Plated
Weight	190g
Size:	See outline


Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+9V
RF Input Power	+15dBm
Operating Temperature	0 to +50C
Storage Temperature	-45 to +85C

Notes:

- ✓ Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
- ✓ This data is only for reference, not for guaranteed specifications.
- ✓ Please contact AT Microwave team to make sure you have the most current data.
- ✓ Always pay attention to the temperature of the case, heatsink and fan are required if case temperature exceeds over 50C.



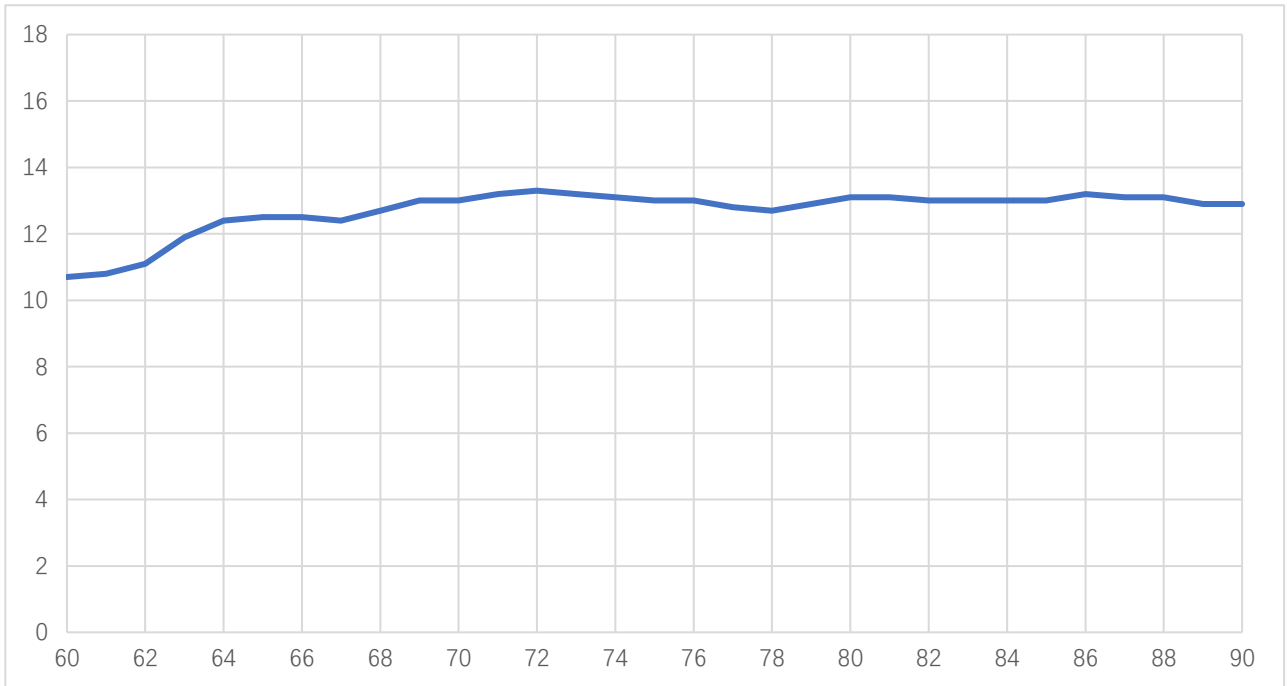

Pout vs Frequency

Dimension (unit in mm)

