



# AT-AM2-3436-13A

Active Multiplier x4, 34-36GHz Pout=+13dBm

## Active Frequency Multiplier, X4, 34-36GHz



### Description:

AT-AM4-3436-13A is a broadband frequency multiplier. The multiplier has an input frequency of 8.5-9 GHz with a typical output +13dBm from 34-36GHz.

The integrated input and output buffers deliver high output power at a low drive level. The multiplier also has a typical harmonic suppression. The input port is SMA female, and the output is 2.92mm Female. Other port configurations are available under different requirement.

More information, visit: [www.atmicroave.com](http://www.atmicroave.com)

### Feature

- ✓ Frequency: 34-36GHz
- ✓ Pout: +13dBm typical
- ✓ Input: 8.5-9GHz
- ✓ Low Harmonics

### Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

## Electronical Specifications:

Parameter	Min	Typical	Max
Input Frequency	8.5GHz		9GHz
Input Power	+0	+3dBm	+6
Multiplier Factor		X4	
Output Frequency	34GHz		36GHz
Output Power		+13dBm	
1 <sup>st</sup> Harmonic Suppression		-40dBc	
3 <sup>rd</sup> Harmonic Suppression		-40dBc	
4 <sup>th</sup> Harmonic Suppression		-40dBc	
Drain Voltage		+5V	+8V
Current		100mA	
Spec Temp		25C	





# AT-AM2-3436-13A

Active Multiplier x4, 34-36GHz Pout=+13dBm

## Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	2.92mm Female
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	80g
Size:	30x30x9.5mm

## Absolute Maximum Ratings Table


Parameter	Value
Drain Supply	+13V
RF Input Power	+10dBm
Operating Temperature	-20 to +70C
Storage Temperature	-65 to +150C

### Notes:

- ✓ Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
- ✓ This data is only for reference, not for guaranteed specifications.
- ✓ Please contact AT Microwave team to make sure you have the most current data.
- ✓ Always pay attention to the temperature of the case, heatsink and fan are required if case temperature exceeds over 50C.



**Dimension:** (Unit:mm)

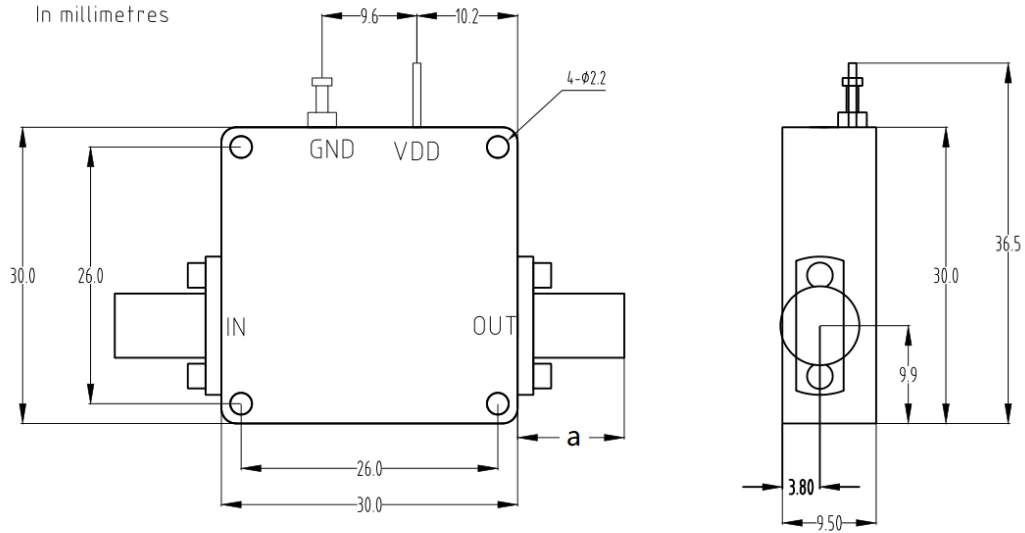

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

Heat Sink Required If Case Temp Higher Than 50C

