


## V Band X4 Active Frequency Multiplier 45-70GHz, Pout=+18dBm, Low Input Power

2022-5-1

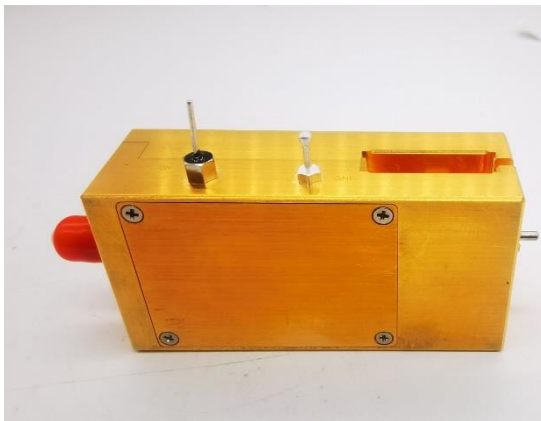

### Description:

AT-AM4-4570-18L is a V band, active x4 frequency multiplier with low input power. The multiplier has an input frequency of 11.25-17.5 GHz with a typical output +18dBm from 45-70GHz. It also can be used up to 75GHz with a little lower output power.

The input port is SMA female, and the output is WR-15. Other port configurations are available under different requirement.

More information, please visit [www.atmicrowave.com](http://www.atmicrowave.com)

### Feature

- ✓ Frequency: 45-70GHz
- ✓ Pout: +18dBm typical
- ✓ Input: 11.25-17.5GHz
- ✓ Low Harmonics

### Application

- ✓ V band Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

### Electrical Specifications:

Parameter	Min	Typical	Max
Input Frequency	11.25GHz		17.5GHz
Input Power	+0dBm	+3dBm	+7dBm
Multiplier Factor		X4	
Output Frequency	45GHz		70GHz
Output Power	+17dBm	+18dBm	
X3/X5 Suppression		-25dBc	
Drain Voltage		+5V	
Current		0.65A	
Spec Temp		25C	





# AT-AM4-4570-18L

Active Multiplier x4, 45-70GHz Pout=+18dBm

## Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	WR-15
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	190g
Size:	See outline

## Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+7V
RF Input Power	+15dBm
Operating Temperature	0 to +50C
Storage Temperature	-65 to +150C

### Notes:

- ✓ Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
- ✓ This data is only for reference, not for guaranteed specifications.
- ✓ Please contact AT Microwave team to make sure you have the most current data.
- ✓ Always pay attention to the temperature of the case, heatsink and fan are required if case temperature exceeds over 50C.

## Part Number Selection Guide

Part Number	Description
AT-AM4-4570-18C	High Input driver +13dBm
AT-AM4-4570-18L	Low Input diver option, +3dBm. Recommended






# AT-AM4-4570-18L

Active Multiplier x4, 45-70GHz Pout=+18dBm

## Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

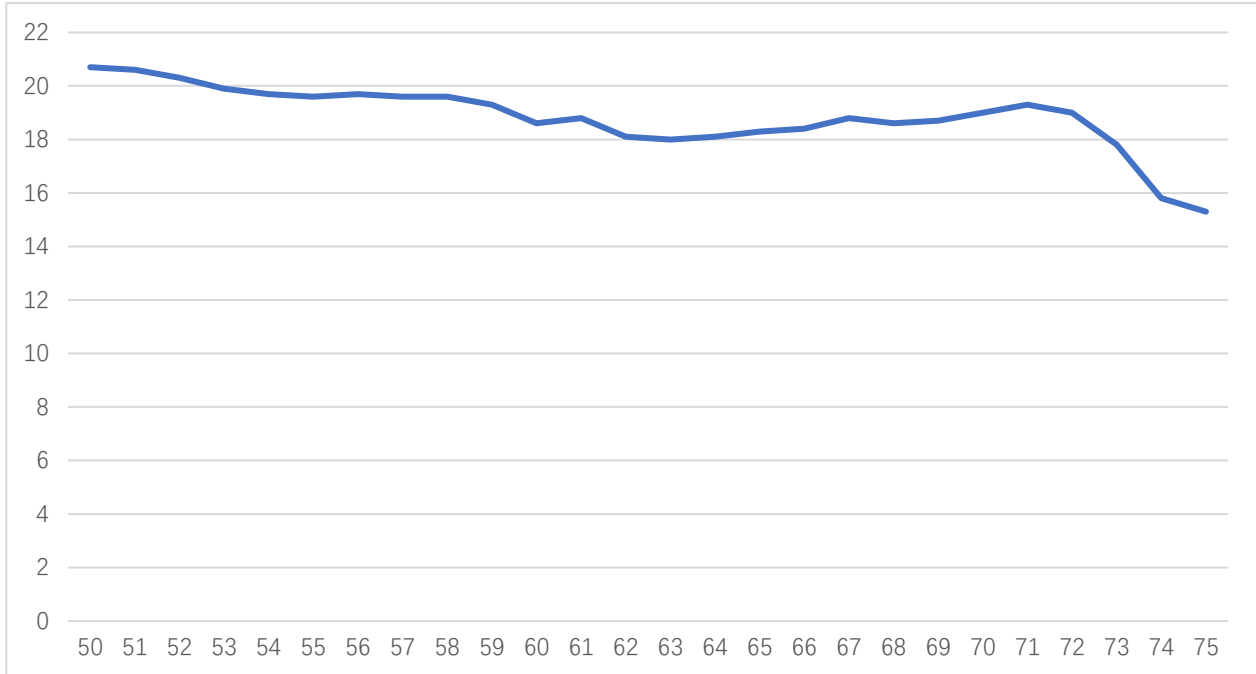

Pout vs Frequency



## Dimension (in mm)

