

AT-BPF-915955: 91.5-95.5GHz Band-Pass Filter



Product Overview

AT Microwave offers high performance band waveguide band-pass filter from 26.5-170GHz. Other frequency bands and rejection requirement can provide according to request.

Based on our excellent design work, precise machine tolerance and outstanding quality plating, we can provide band pass filter with low insertion loss, good return loss and high rejection at the same time.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Low Insertion Loss
- ✓ Good Return Loss
- ✓ High Stop Band Suppression
- ✓ Sharp Roll-Off

Application

- ✓ W band Imaging
- ✓ FOD (Foreigner Objects Debris)
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Passband Frequency		91.5-95.5GHz	
Insertion Loss		-0.6 dB	-1.5
Passband Return Loss	-8	-15 dB	
Low End Rejection: 75-88GHz	-35	-40dBc	
High End Rejection: 98-110GHz	-35	-40dBc	
Spec Temp		25C	





AT-BPF-915955

W Band Waveguide Band-Pass Filter, WR-10


Mechanical Information

Item	Description
Input Port	WR-10
Output Port	WR-10
Case Material	Brass
Finish	Silver
Weight	22g
Size:	22x19x19mm

Absolute Maximum Ratings Table

Parameter	Value
Operating Temperature	-40 to +85C
Storage Temperature	-65 to +150C

TEST DATA (25C)

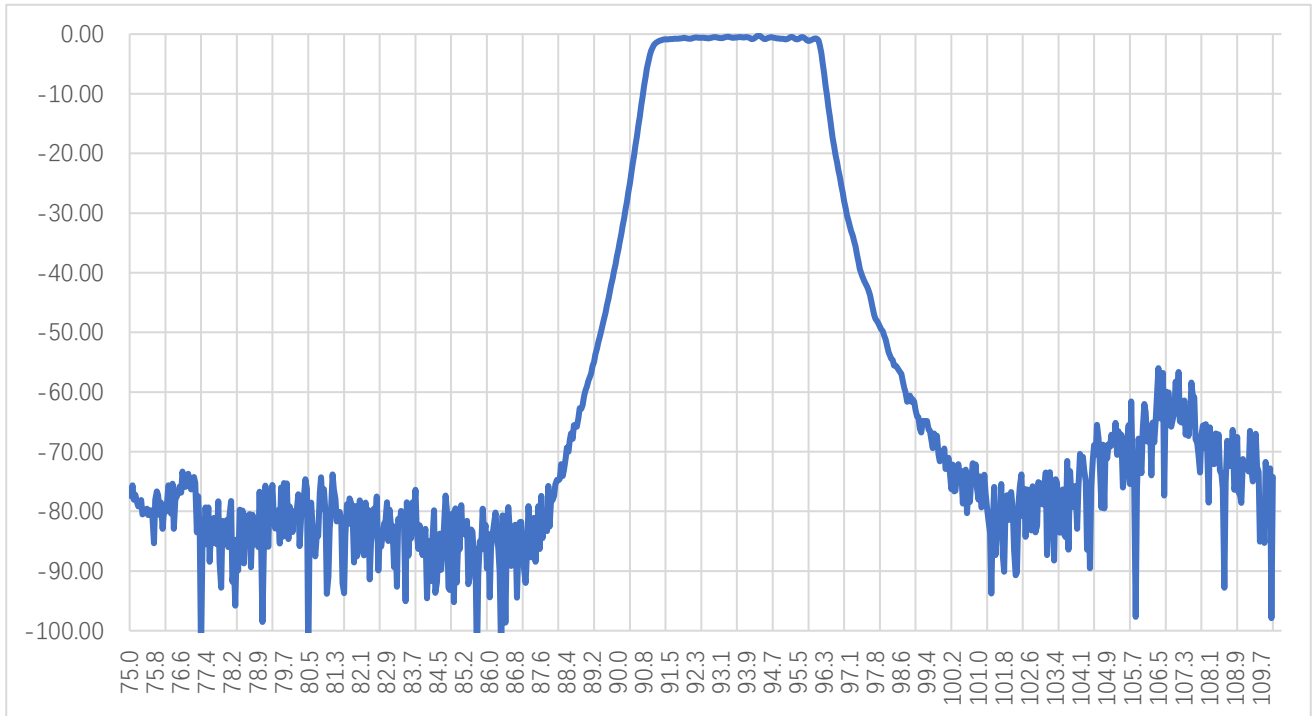

Insertion Loss vs Frequency



Dimension: (mm)

