


Full V Band Active Multiplier

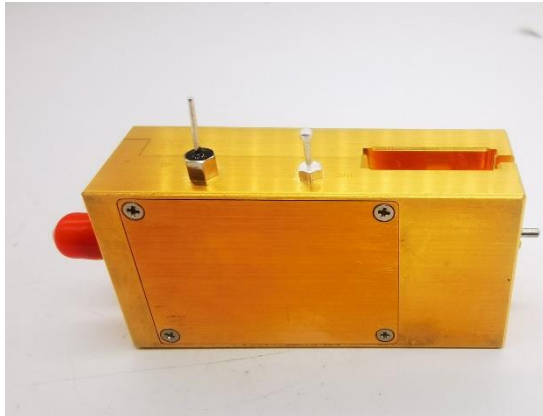

Description:

AT-AM6-5075-15 is a full V band, active x6 frequency multiplier. The multiplier has an input frequency of 8.33-12.5 GHz with a typical output +15dBm from 50-75GHz.

The integrated input and output buffers deliver high output power at a low drive level. The multiplier also has a typical harmonic suppression. The input port is SMA female, and the output is WR-15. Other port configurations are available under different requirement.

More information, please visit www.atmicrowave.com

Feature

- ✓ Frequency: 50-75GHz
- ✓ Pout: +15dBm typical
- ✓ Input: 8.33-12.5GHz
- ✓ Low Harmonics

Application

- ✓ V band Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Electronical Specifications:

Parameter	Min	Typical	Max
Input Frequency	8.33GHz		12.5GHz
Input Power	+5	+8dBm	+10
Multiplier Factor		X6	
Output Frequency	50GHz		75GHz
Output Power		+15dBm	
Harmonic Suppression		-15dBc	
Drain Voltage		+5V/600mA	+8V
Spec Temp		25C	





AT-AM6-5075-15

Active Multiplier x6, 50-75GHz Pout=+15dBm

Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	WR-15
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	190g
Size:	50X30X20 mm

Absolute Maximum Ratings Table


Parameter	Value
Drain Supply	+9V
RF Input Power	+20dBm
Operating Temperature	0 to +50C
Storage Temperature	-65 to +150C

Notes:

- ✓ Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
- ✓ This data is only for reference, not for guaranteed specifications.
- ✓ Please contact AT Microwave team to make sure you have the most current data.
- ✓ Always pay attention to the temperature of the case, heatsink and fan are required if case temperature exceeds over 50C.



V Band 50-75GHz

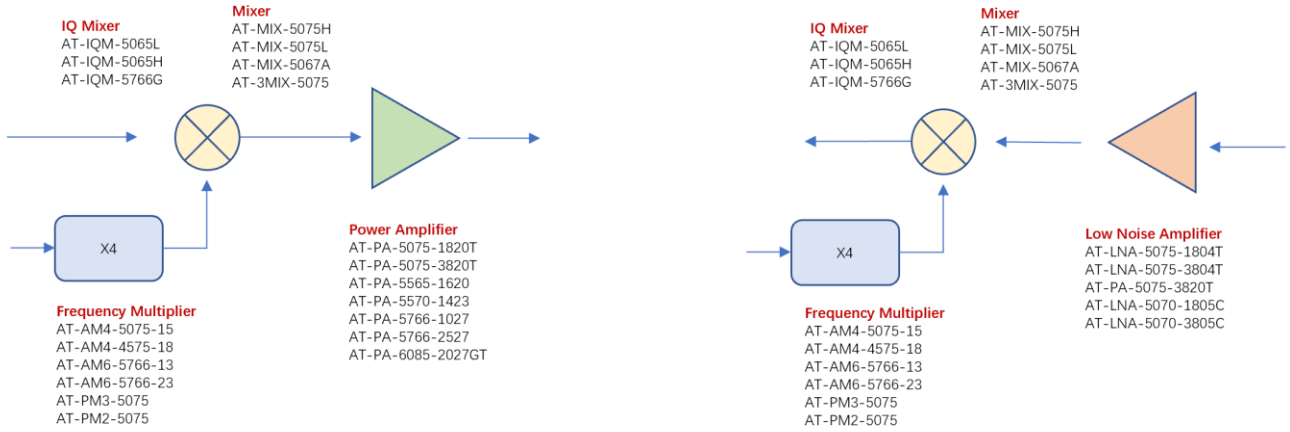

Dimension(TBD)

