

## 15-50GHz Broadband Amplifier, +18dBm



### Product Overview

AT-PA-1550-1518X is high gain power amplifier with +18dBm output power in the frequency of 15-50GHz. The DC power requirement is +8V/260mA. The module is with 2.4mm connector.

The power amplifier has high gain, high linearity, low input/output return loss and flat gain response.

More information, please visit [www.atmicrowave.com](http://www.atmicrowave.com)

### Advantages

- ✓ Frequency: 15-50GHz
- ✓ Pout:+18dBm
- ✓ Small signal gain: 30dB
- ✓ Single Power Supply

### Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

### Key Features

Parameter	Min	Typical	Max
Frequency		15-50GHz	
Gain		30dB	
P1dB		+16dBm	
Psat		+18dBm	
Drain Supply	+5.5V	+8V	+10V
Current		260 mA	
Input VSWR		1.5	2.5
Output VSWR		1.5	2.5
Spec Temp		25C	





# AT-PA-1550-3018X

## 15-50GHz Power Amplifier

### Mechanical Information

Item	Description
Input Port	2.4mm Female
Output Port	2.4mm Female
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	90g
Size:	30x30x9.5 mm

### Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+13V
RF Input Power	-5 dBm
Operating Temperature	-20 to +70C
Storage Temperature	-65 to +150C

#### Caution:


Please pay attention to the case temperature. If case temperature exceed higher than +50C, heat sink and fan are required, or the amplifier may be damaged.

#### Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



## Dimension: (unit in mm)

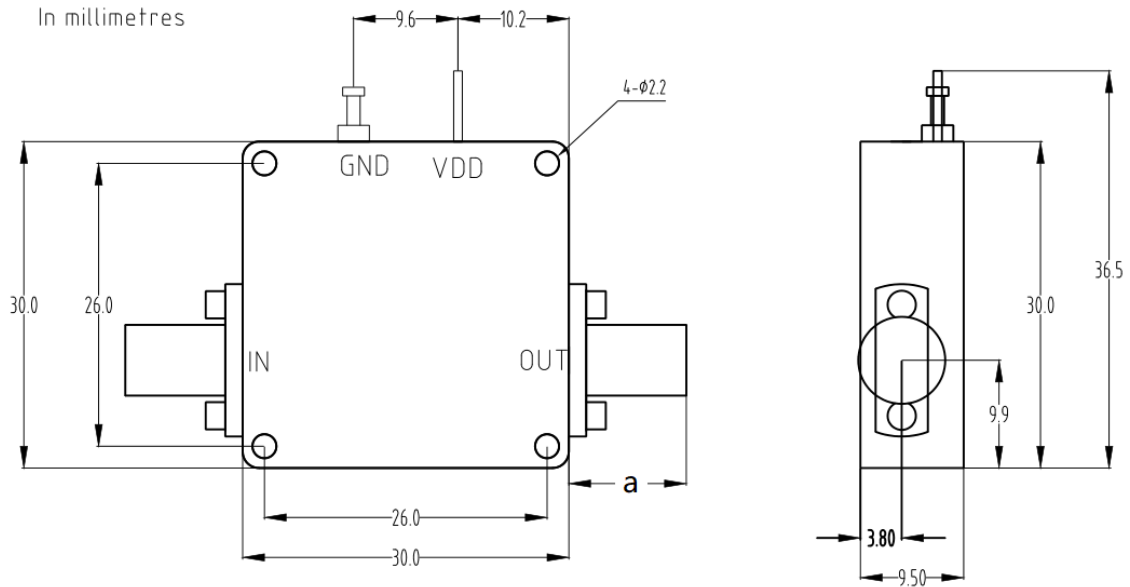

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

Heat Sink Required During Operation if case Temp higher than 50C

