

2.92 mm to 3.5 mm Adapter DC-33GHz

AT-AP-29X35X

Feature

- 2.92 mm to 3.5mm Adapter
- Specified DC-33GHz
- Low Insertion Loss
- Excellent Broadband VSWR



Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Frequency Range(GHz)	Min	Typ	Max	Unit
Insertion Loss	DC-26.5GHz		0.2		dB
	26.5-33GHz		0.3		dB
VSWR	DC-26.5GHz		1.15		
	26.5-33GHz		1.2		

Environmental

- 55 C to +125 C
- Corrosion: MIL-STD 202
- Vibration: MIL-STD 202

Materials

- Body: SU304 Polished & Passivated
- Center Contact: Beryllium Copper Gold Plated
- Insulators: PEI


Mechanical

1000 Cycle Min

Order Information

Connector #1	Connector #2	Part Number
2.92 mm Female	3.5mm Female	AT-AP-29F35F
2.92 mm Female	3.5mm Male	AT-AP-29F35M
2.92 mm Male	3.5mm Female	AT-AP-29M35F
2.92 mm Male	3.5mm Male	AT-AP-29M35M

Dimension

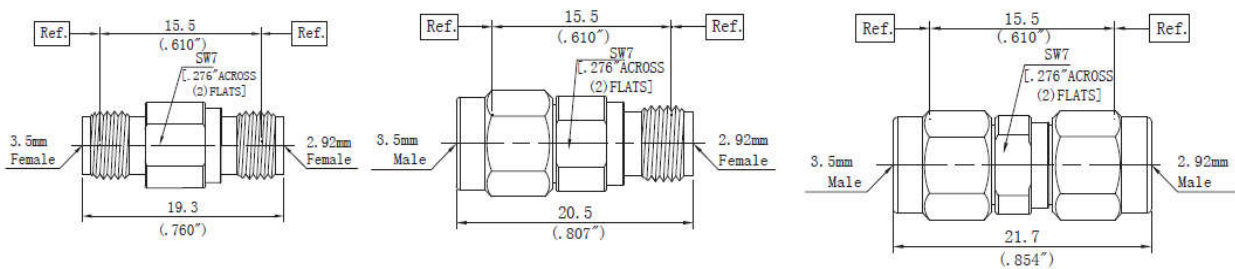

AT Microwave

RM1204,NO.2911, North Zhongshan RD, Putuo District, Shanghai, China, 200063

Tel: +8621-5291 8556 Email: sales@atmicrowave.com www.atmicrowave.com