


40-60GHz High Power Amplifier

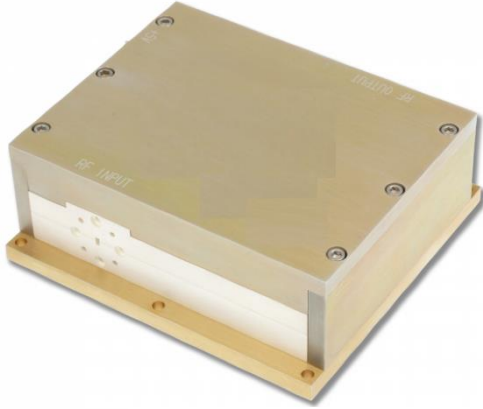

仅供参考，以实物为准

Product Overview

AT-PA-4060-3532GN is GaN Based high power amplifier with +32dBm output power in the frequency of 40-60GHz. The DC power requirement is +16V/1.5A. The module is with standard WR-19 waveguide. Other Connector can be available according to request.

The power amplifier has high gain, high linearity, low input/output return loss and flat gain response.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 40-60GHz
- ✓ Psat:+32dBm
- ✓ Small signal gain: 35dB
- ✓ Single Power Supply

Application

- ✓ U Band Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency		40-60GHz	
Small Signal Gain	32	35dB	
Psat Gain		25dB	
Psat	+30dBm	+32dBm	
Vdd		+16V	+18V
Id(NO RF)		0.95A	
Id(Psat)		1.5A	
Input Return Loss		-7dB	
Output Return Loss		-7dB	
Spec Temp		25C	





AT-PA-4060-3532GN

40-60GHz High Power Amplifier

Mechanical Information

Item	Description
Input Port	WR-19
Output Port	WR-19
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	100g
Size:	90x88x35 mm

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+20V
RF Input Power	+15dBm
Operating Temperature	0 to +50C
Storage Temperature	-65 to +150C

Notes:


1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data

Caution:

Please pay attention to the case temperature. If case temperature exceed higher than +50C, heat sink and fan are required, or the amplifier may be damaged.



Dimension: (TBD)

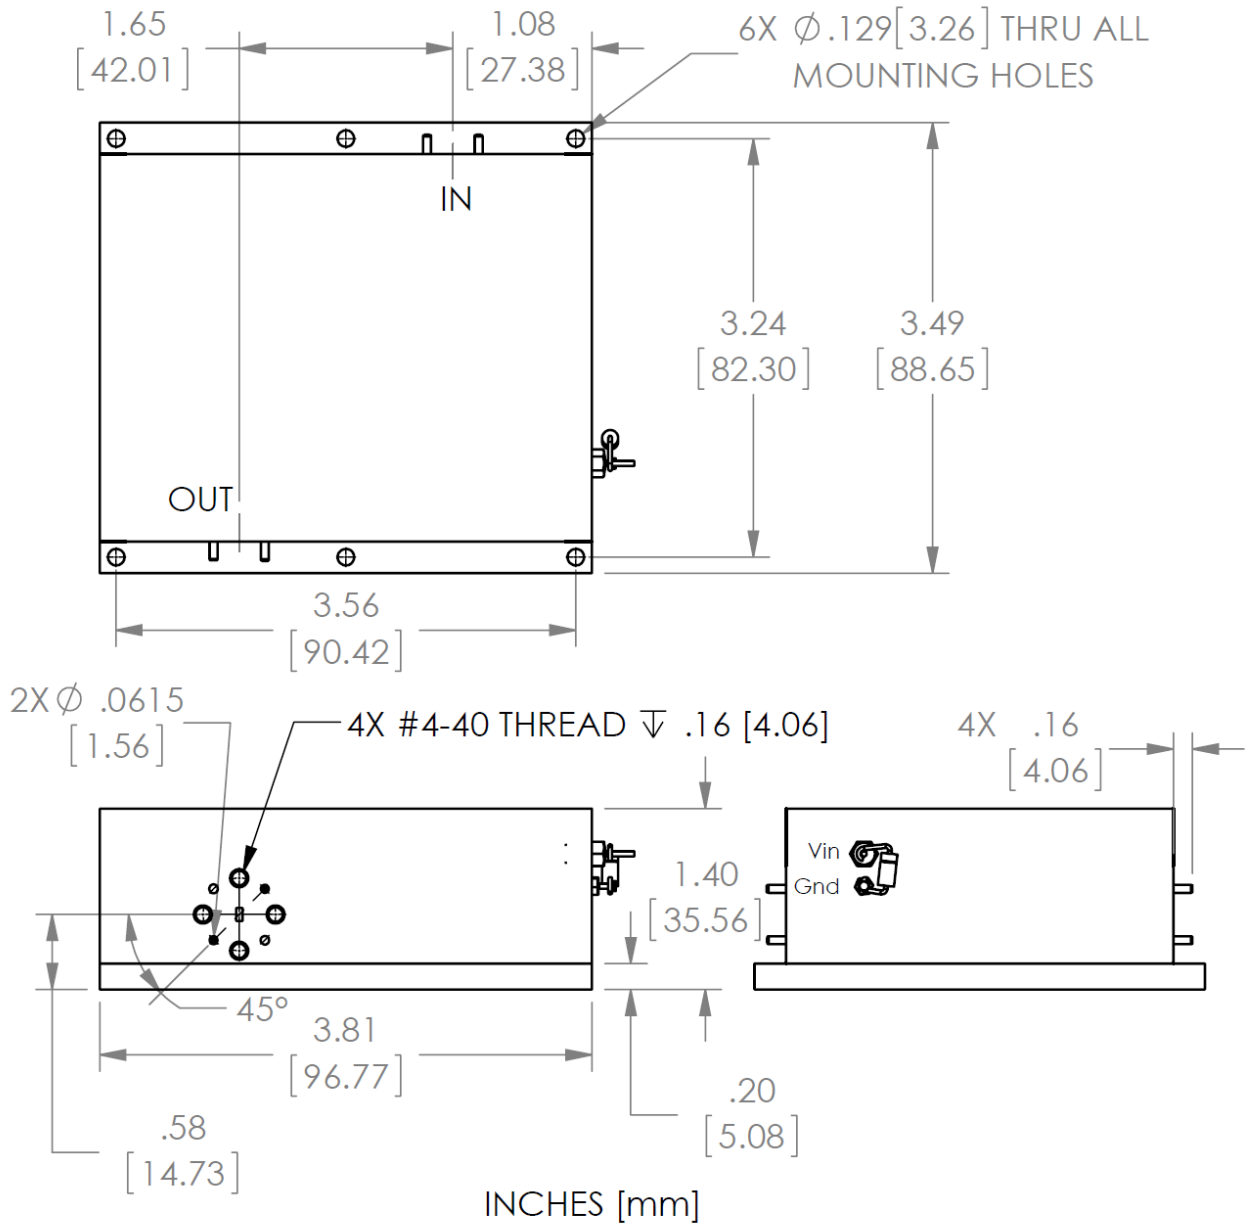

Heatsink Required During Operation

