

N to SMA Adapter DC-18GHz

AT-AP-NXSX

Feature

- N to SMA Adapter
- Specified DC-18GHz
- Low Insertion Loss
- Excellent Broadband VSWR



Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Frequency Range(GHz)	Min	Typ	Max	Unit
Insertion Loss	DC-12GHz		0.1		dB
	12-18GHz		0.2		dB
VSWR	DC-12GHz		1.15		
	12-18GHz		1.2		

Environmental

- 55 C to +125 C
- Corrosion: MIL-STD 202
- Vibration: MIL-STD 202

Materials

- Body: SU304 Polished & Passivated
- Center Contact: Beryllium Copper Gold Plated
- Insulators: PEI


Mechanical

- 1000 Cycle Min

Order Information

Connector #1	Connector #2	Part Number
N Female	SMA Female	AT-AP-NFSF
N Female	SMA Male	AT-AP- NFSM
N Male	SMA Female	AT-AP-NMSF
N Male	SMA Male	AT-AP-NMSM

Dimension

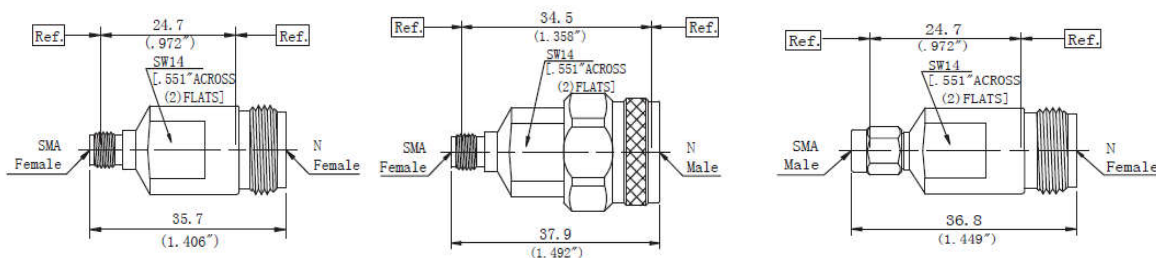

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063
 Tel:+8621-5291 8556 Email:sales@atmicrowave.com www.atmicrowave.com