

SMA to SMA Adapter DC-26.5GHz, Flange

AT-AP-SFSF-FL

Feature

- SMA TO SMA Adapter
- Specified DC-26.5GHz
- Low Insertion Loss
- Excellent Broadband VSWR



Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

| Parameter | Frequency Range(GHz) | Min | Typ | Max | Unit |
|----------------|-----------------------|-----|------|-----|------|
| Insertion Loss | DC-26.5GHz | | 0.5 | 1 | dB |
| VSWR | DC-26.5GHz | | 1.15 | 1.2 | |

Environmental

- 55 C to +125 C
- Corrosion: MIL-STD 202
- Vibration: MIL-STD 202

Materials

- Body: SU304 Polished & Passivated
- Center Contact: Beryllium Copper Gold Plated
- Insulators: PEI


Mechanical

1000 Cycle Min

Order Information

| Connector #1 | Connector #2 | Part Number |
|--------------|--------------|---------------|
| SMA Female | SMA Female | AT-AP-SFSF-FL |

Dimension

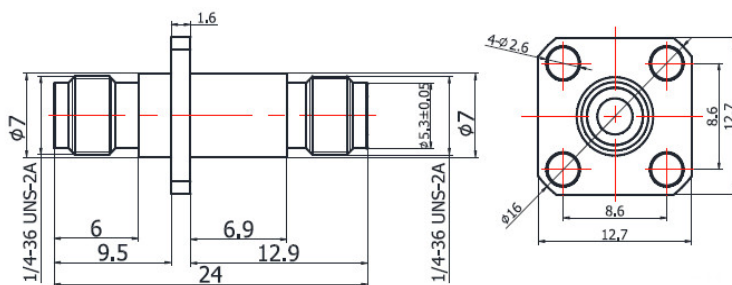

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063

Tel:+8621-5291 8556 Email:sales@atmicrowave.com www.atmicrowave.com