

10MHz-43.5GHz Broadband Amplifier



Product Overview

AT-BB-0043-5020C is broadband amplifier from 10MHz-43.5GHz, with $P_{out}=+22\text{dBm}$, $NF=4.5\text{dB}$. It can be used both as Power amplifier or low noise amplifier. The DC power requirement is +9V/450mA. The module is with 2.92mm Female

+5V Single power supply (With 3dB lower output power) is also available according to request. Bench-top test equipment type with 110-240V power supply is available according to request.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 10MHz-43.5GHz
- ✓ P_{sat} : +22dBm
- ✓ Small signal gain: 50dB
- ✓ Single Power Supply

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency		10MHz-43.5GHz	
Gain	47dB	50dB	
Gain Flatness		+/-2.5dB	+/-4dB
P1dB (1-40GHz)		+20dBm	
P_{sat} (1-40GHz)		+22dBm	
Drain Supply	+8V	+9V	+12V
Current		450 mA	550mA
NF(1-40GHz)		4.5dB	6.5dB
Input Return Loss		-10dB	
Output Return Loss		-10dB	
Spec Temp		25C	

Note1: Lower Vdd is preferred due to lower power consumption. Same RF Performance with +8V to +12V.





AT-BB-0043-5020C

10MHz-43.5GHz Broadband Amplifier

Mechanical Information

Item	Description
Input Port	2.92mm Female
Output Port	2.92mm Female
Case Material	Copper
Finish	Gold Plated
Package Sealing	Epoxy Sealed
Weight (Without Heatsink)	80g
Size:	See outline

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+13V
RF Input Power	+15 dBm
Operating Temperature	-40 to +85C
Storage Temperature	-55 to +125C

Notes:


1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.

Part Number Selection Guide


Item	Description
AT-BB-0043-5020C	Stand Module with DC Power Supply
AT-BB-0043-5020C-LCBT	Low Cost, Compact Bench-Top, +220V Supply with AC/DC Adapter



Test Data(25C)

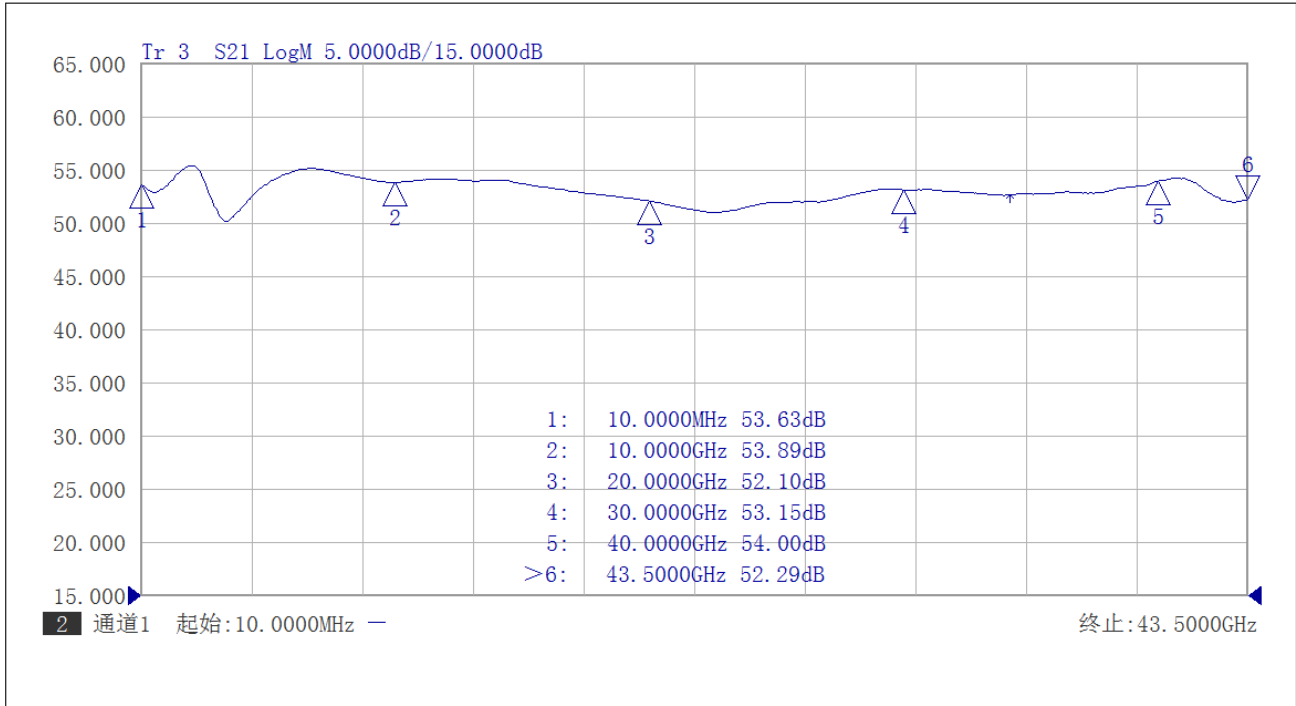


Gain vs Frequency

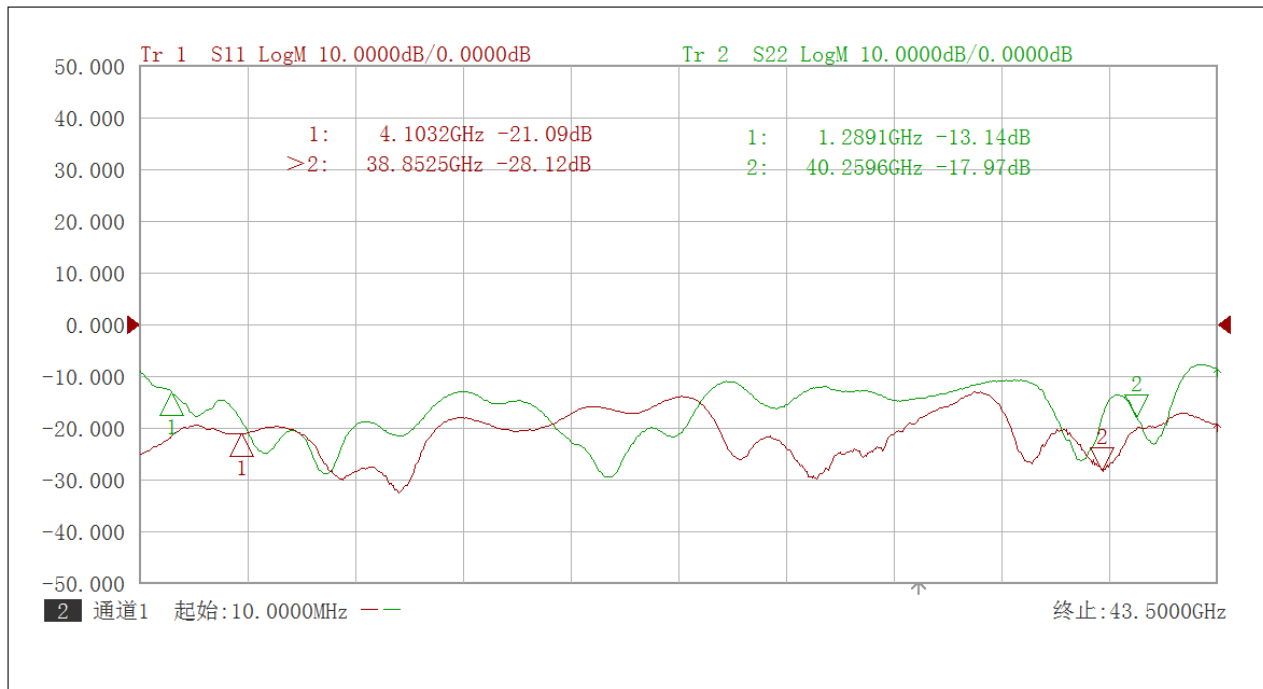


Return Loss vs Frequency



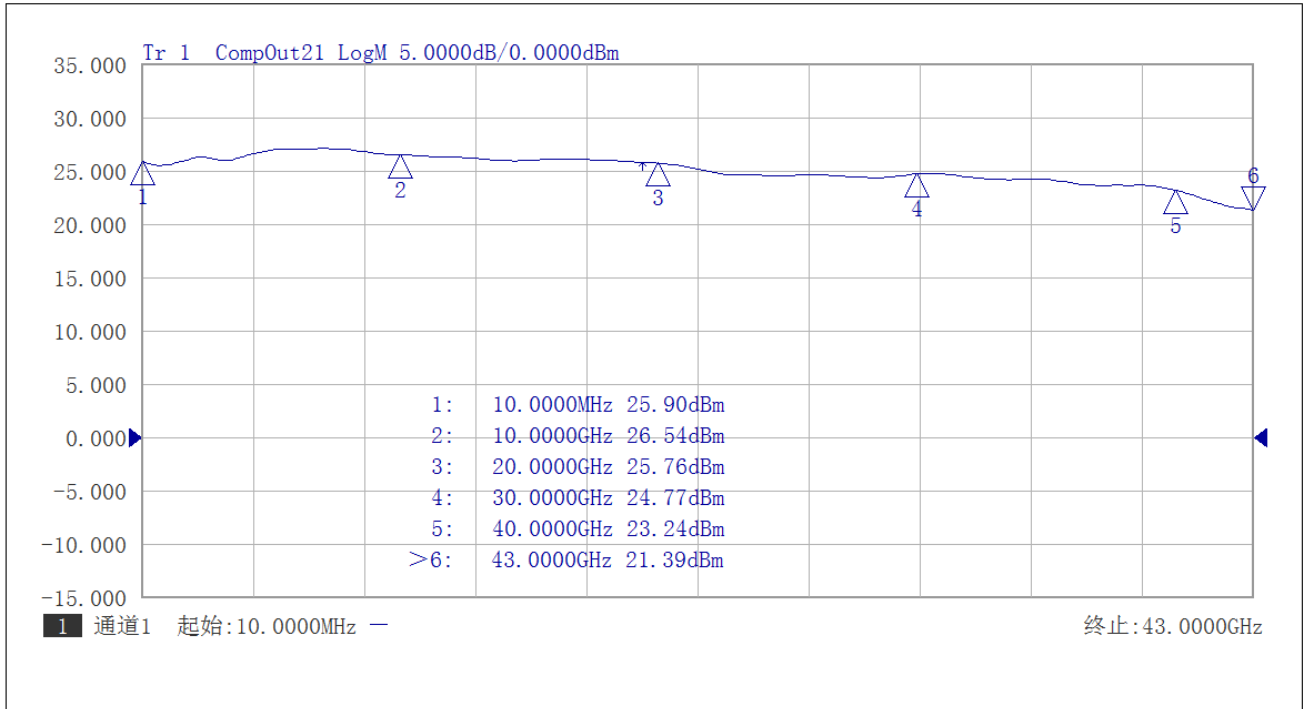


P1db vs Frequency

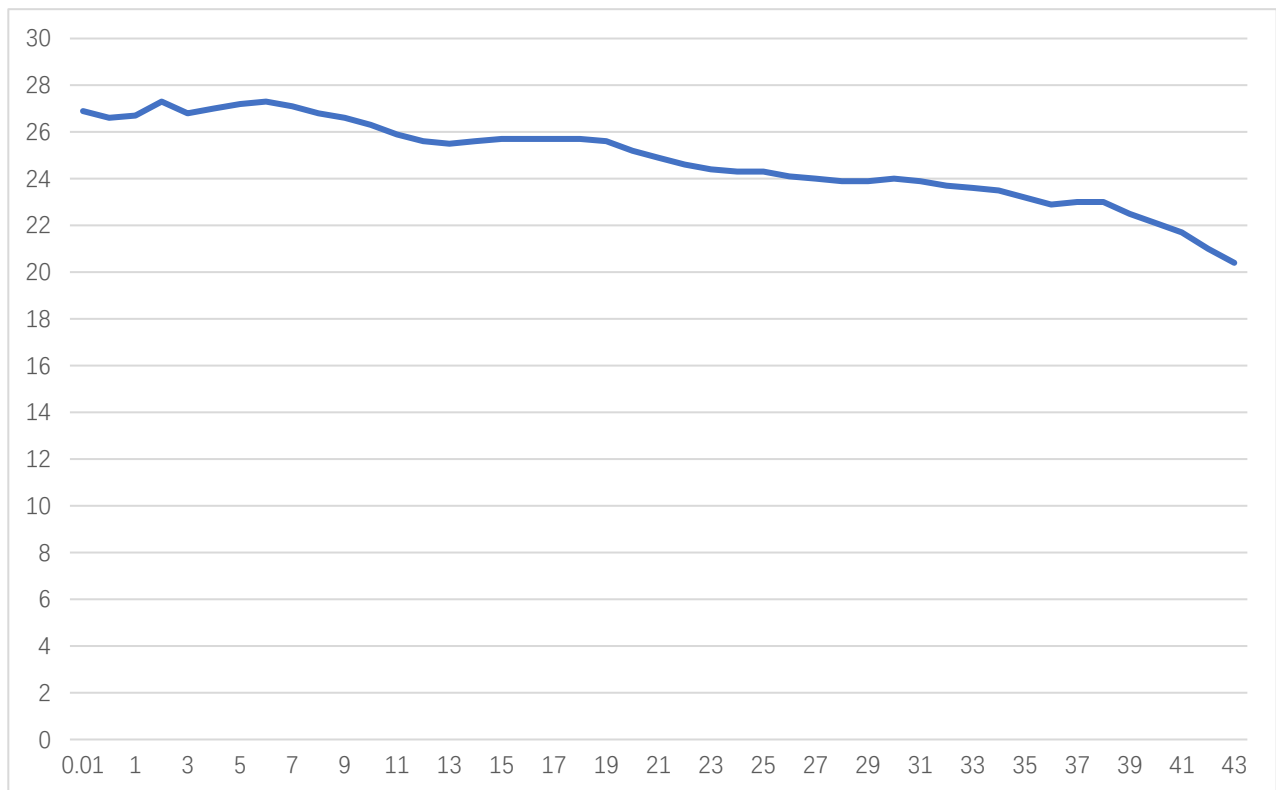

Psat vs Frequency



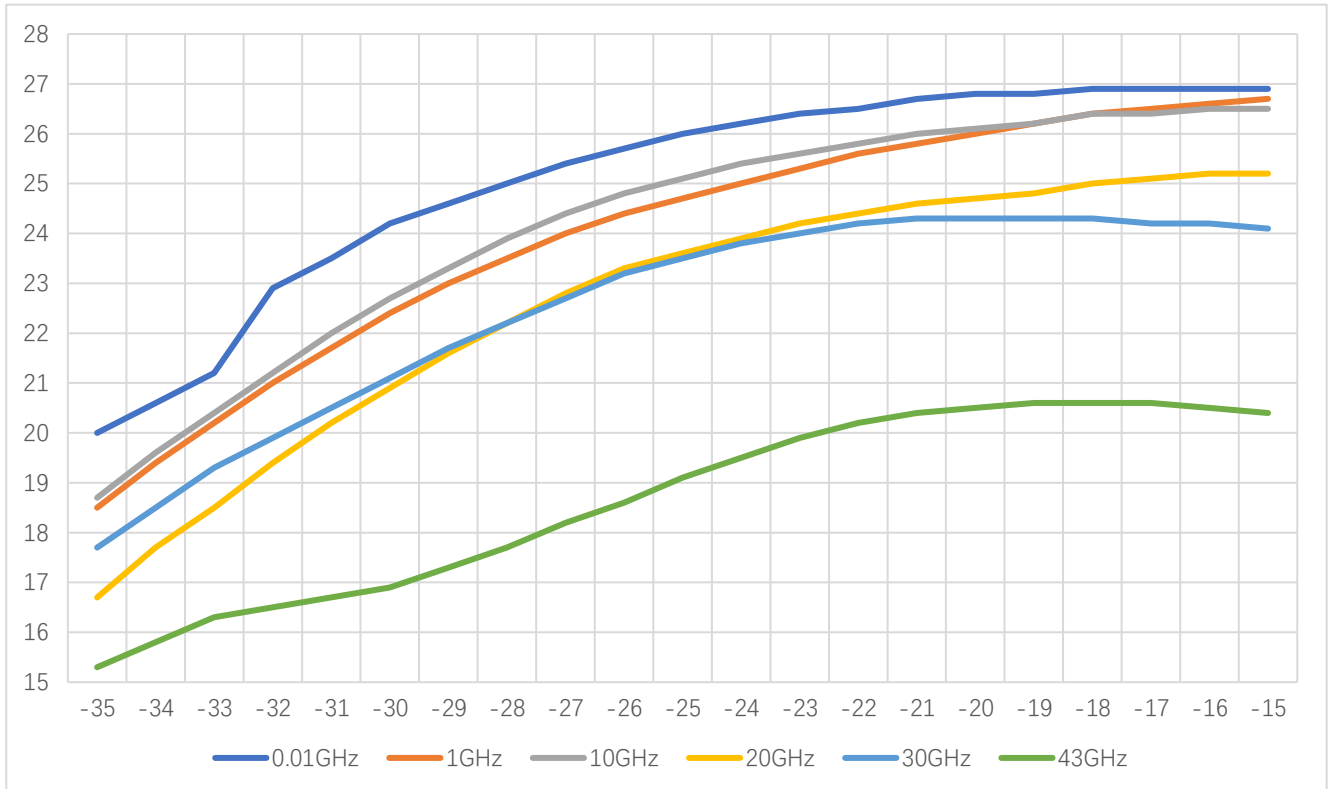


Pout vs Pin



NF vs Frequency



Dimension: (unit in mm)

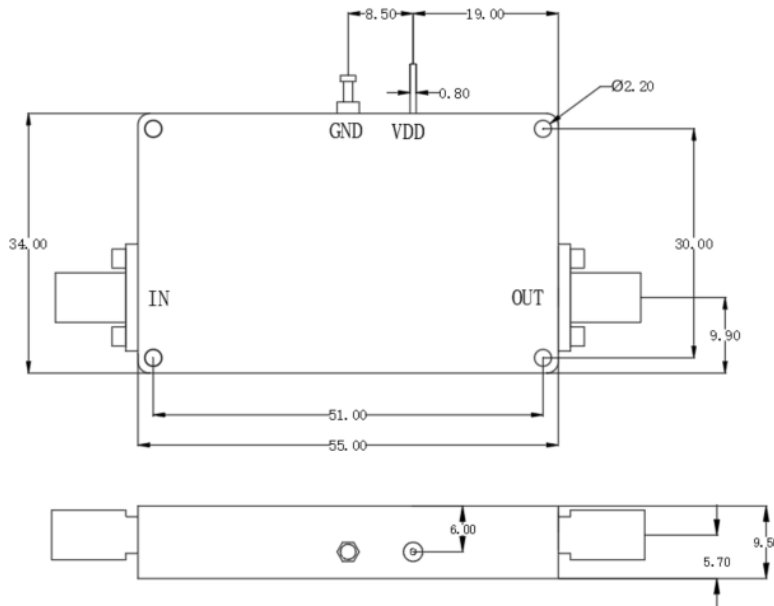


	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

Heat Sink Required During Operation



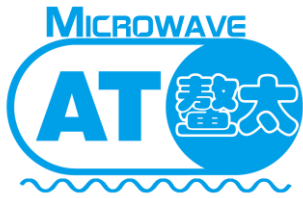

AT-BB-0043-5020C

10MHz-43.5GHz Broadband Amplifier

-LCBT Option Dimension: (unit in mm)

