

3GHz-67GHz Broadband Amplifier

Gain=30dB, Pout=+15dBm, 1.85mm



Product Overview

AT-BB-0367-3015C is broadband amplifier from 3GHz-67GHz, with Pout=+15dBm, NF=6dB. It can be used both as Power amplifier or low noise amplifier. The DC power requirement is +8V/220mA. The module is with 1.85mm Female

The broadband amplifier has high gain, high linearity, low input/output return loss and flat gain response. Bench-top test equipment type with 110-240V power supply is available according to request.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 3GHz-67GHz
- ✓ Psat:+15dBm
- ✓ Small signal gain: 30dB
- ✓ Single Power Supply

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency		3GHz-67GHz	
Gain	27dB	30dB	
P1dB		3-30GHz: +15dBm 30GHz-67GHz: +12dBm	
Psat		3-30GHz: +18dBm 30GHz-67GHz: +13dBm	
Drain Supply		+8V	+12V
Current		330 mA	
NF(3-50GHz)		6dB	8dB
Input Return Loss		-10dB	
Output Return Loss		-8dB	
Spec Temp		25C	





AT-BB-0367-3015C

3GHz-67GHz Broadband Amplifier

Mechanical Information

Item	Description
Input Port	1.85mm Female
Output Port	1.85mm Female
Case Material	Copper
Finish	Gold Plated
Package Sealing	Epoxy Sealed
Weight (Without Heatsink)	80g
Size:	See outline

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+13V
RF Input Power	+5 dBm
Operating Temperature	-40 to +85C
Storage Temperature	-55 to +125C

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.


Part Number Selection Guide

Item	Description
AT-BB-0367-3015C	Stand Module with DC Power Supply
AT-BB-0367-3015C- LCBT	L ow Cost, C ompact B ench- T op, +220V Supply with AC/DC Adapter




Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

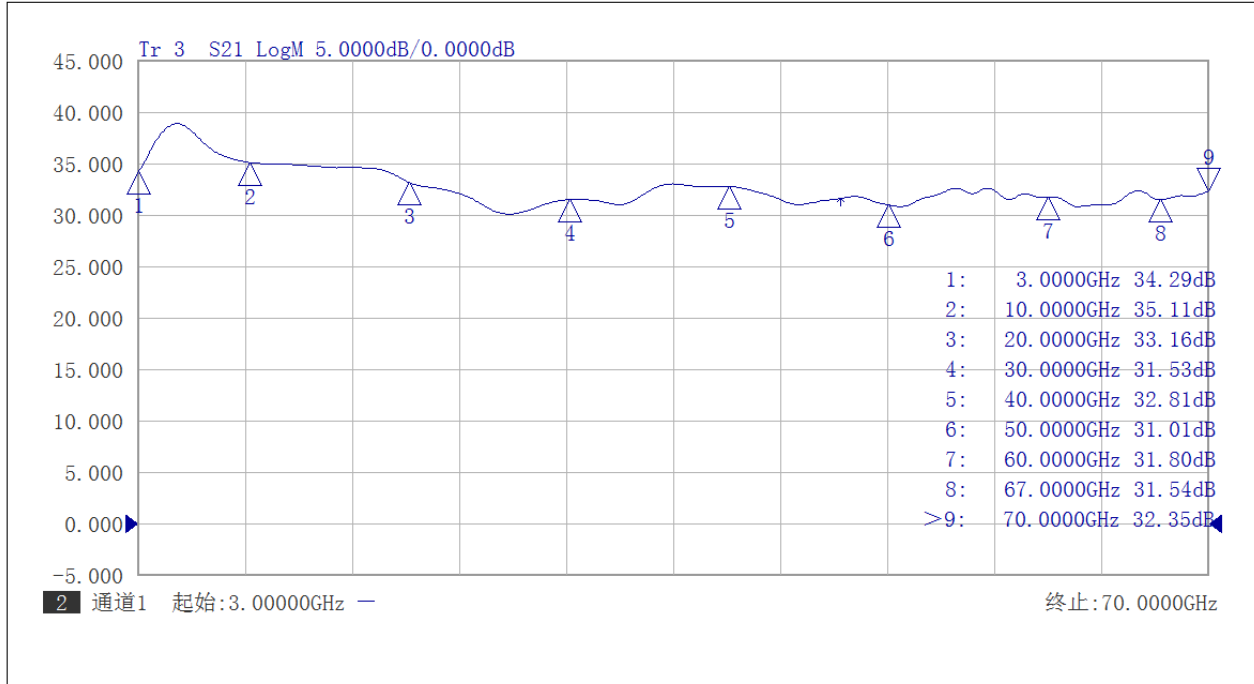


Gain vs Frequency

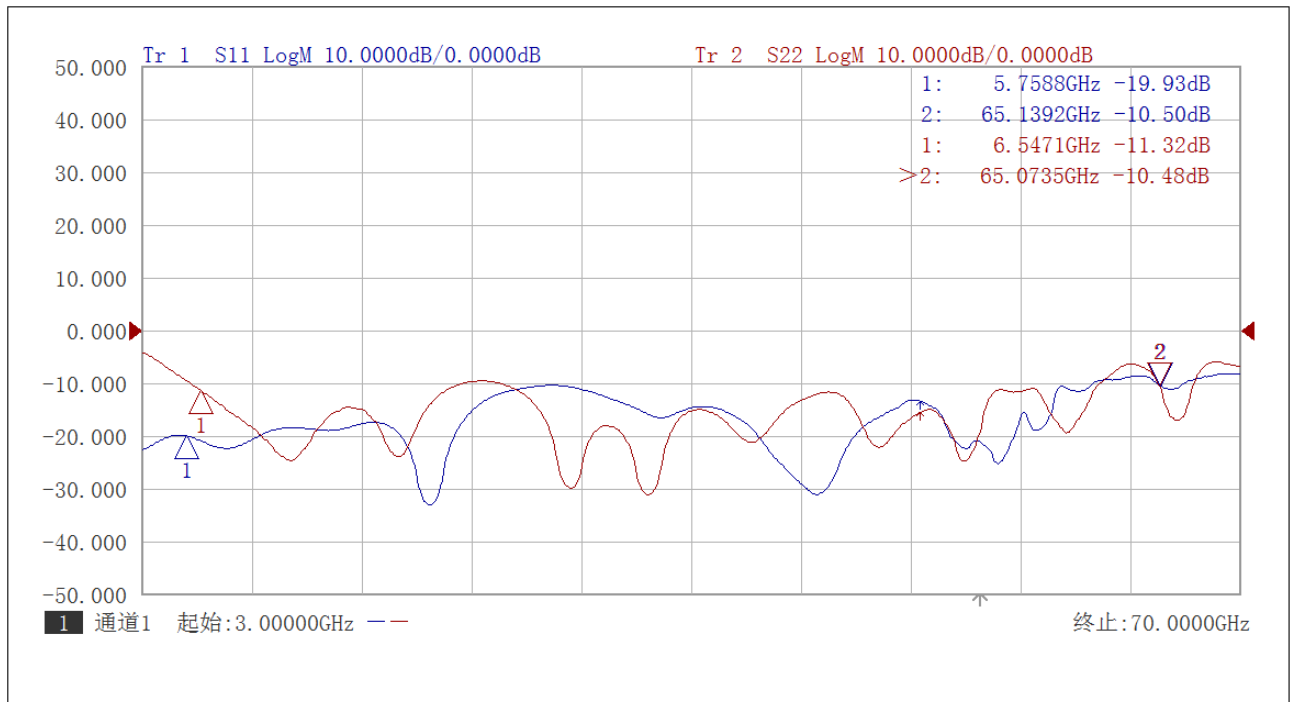


Return Loss vs Frequency



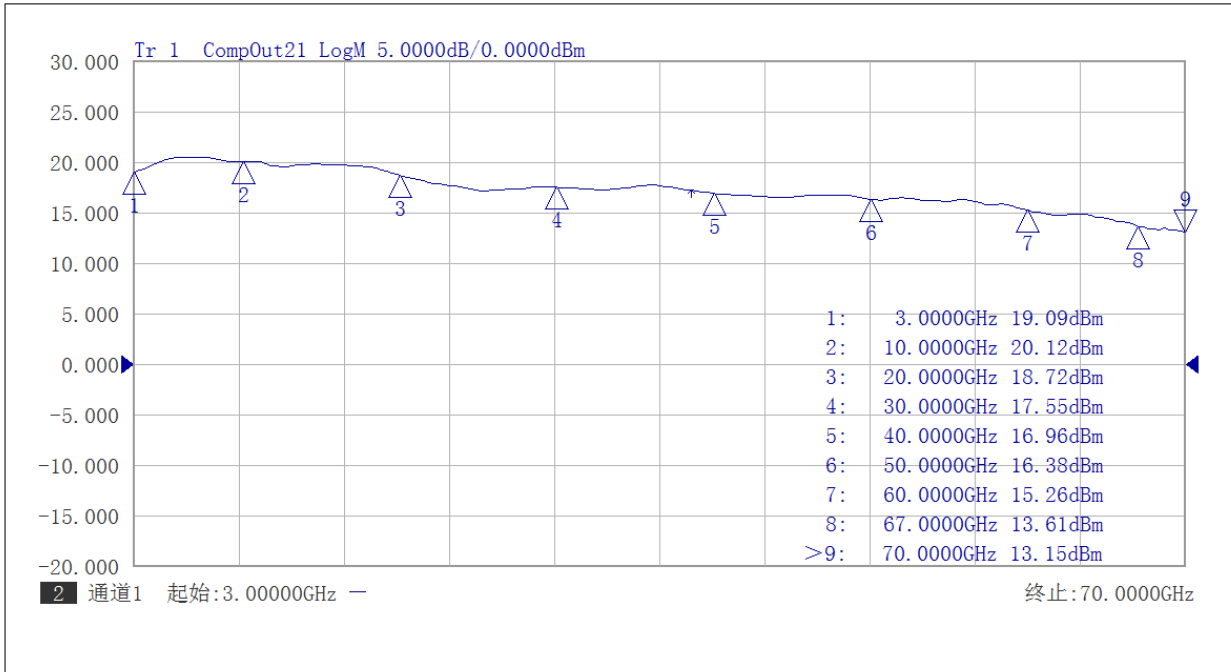


P1db vs Frequency

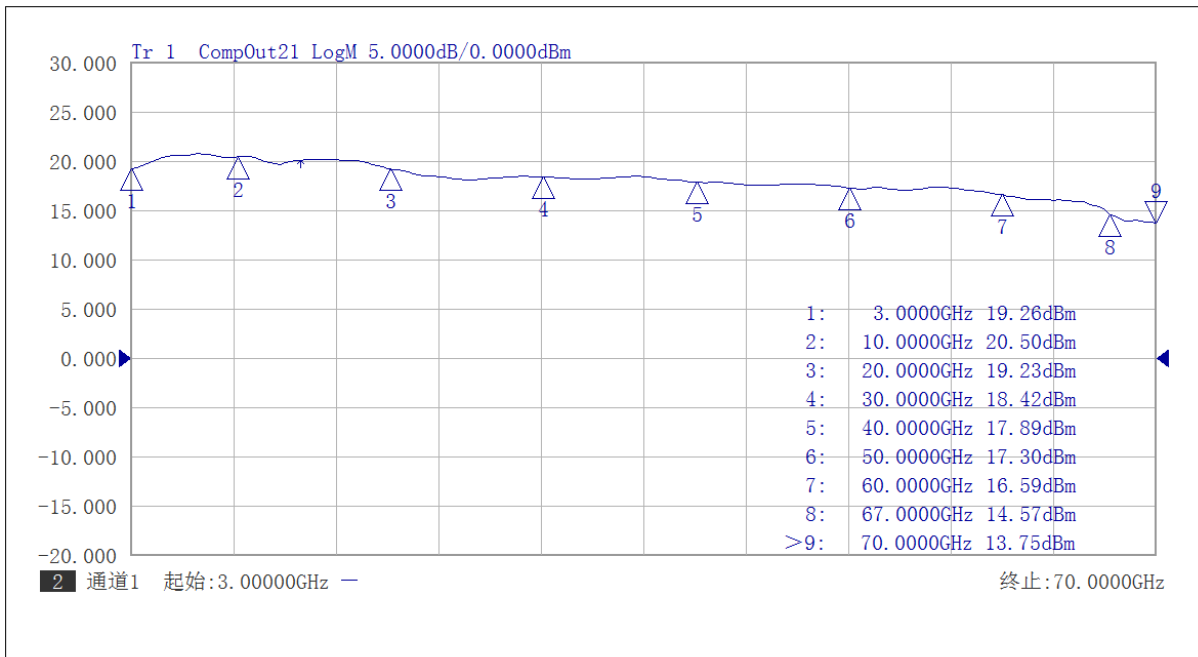


P3db vs Frequency



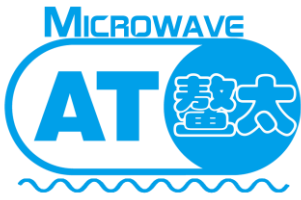


AT-BB-0367-3015C

3GHz-67GHz Broadband Amplifier

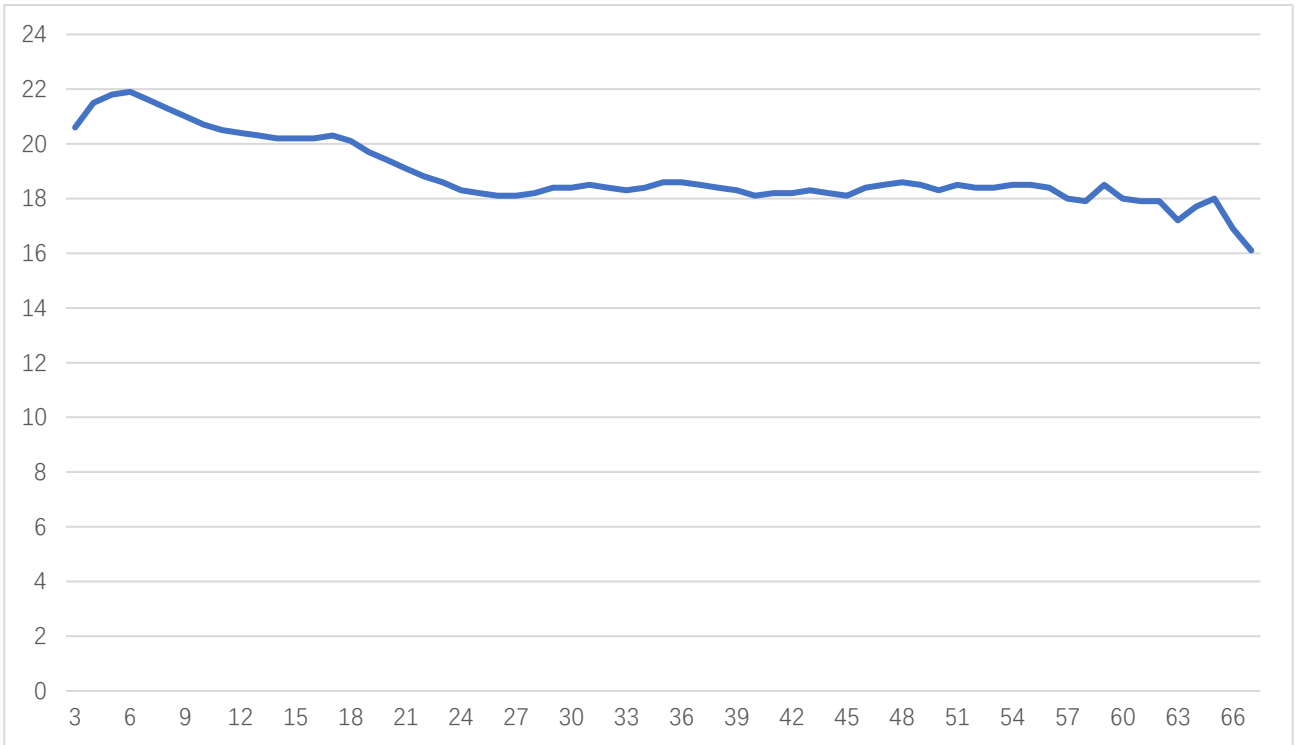


Psat vs Frequency

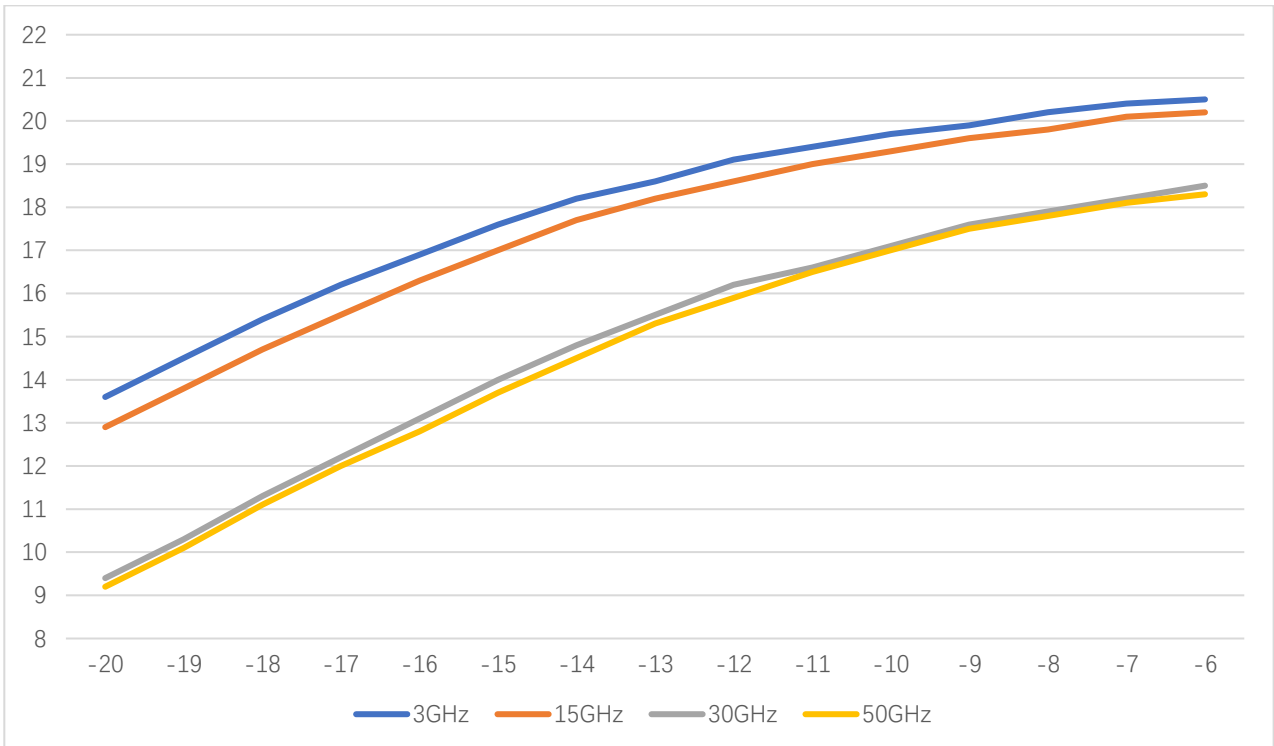


Pout vs Pin at 3/20/40/50GHz



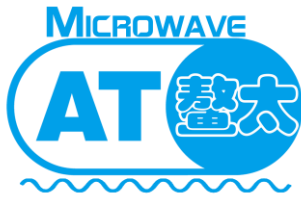

AT-BB-0367-3015C



3GHz-67GHz Broadband Amplifier

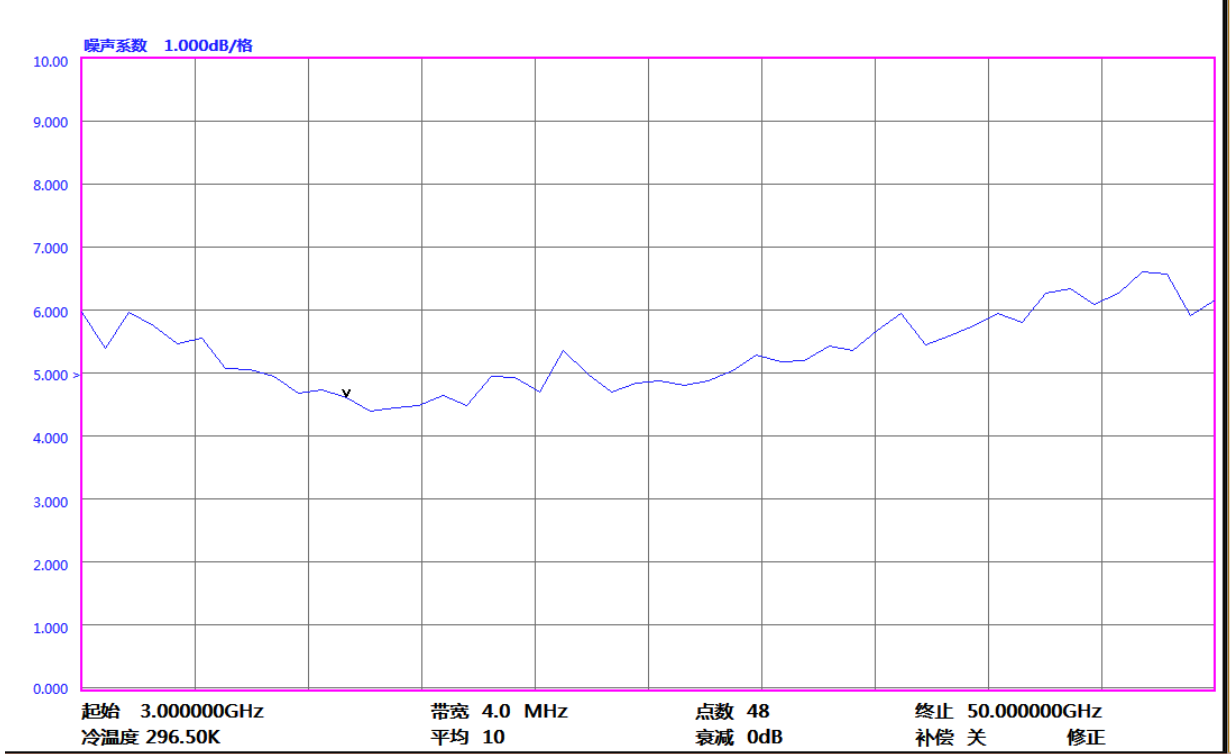

NF vs Frequency




Dimension: (unit in mm)

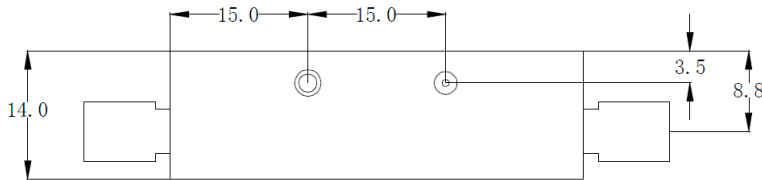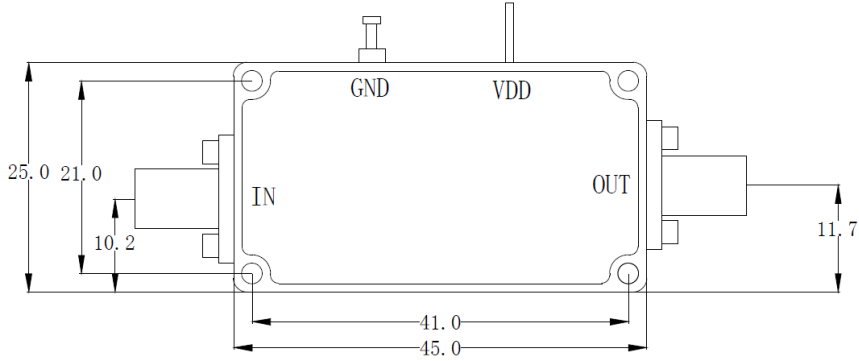

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

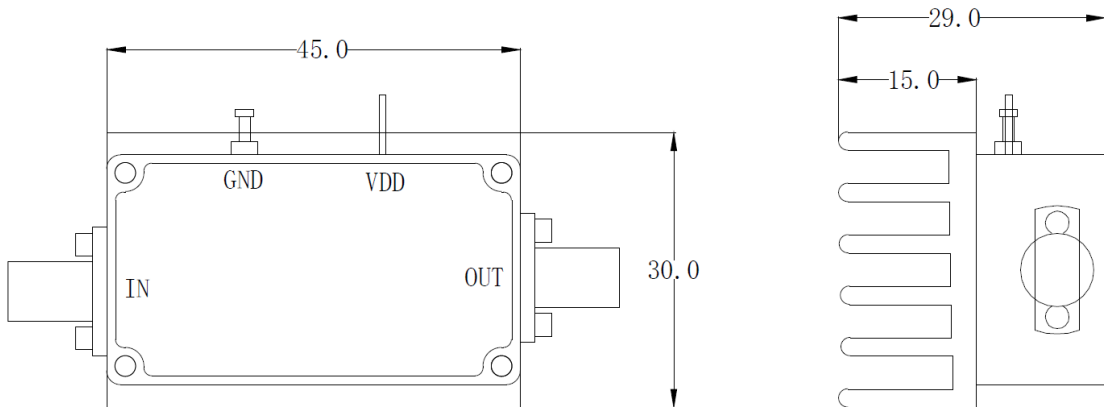

Including a small heatsink without Fan if output Power higher than +20dBm.
 Customers can removed it or use their own heatsink according to actual situation.



-LCBT Option Dimension: (unit in mm)

