

20dB Directional Coupler

ATM-C20-0R526

Feature

- 0.5-26.5GHz Broadband Performance
- Excellent Coupling Flatness
- High Directivity
- Low VSWR



Electrical Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Frequency Range(GHz)	Min	Typ	Max	Unit	
Mean Coupling	0.5-26.5GHz		20 +/-0.7		dB	
Flatness			+/- 1		dB	
Direct Line Inserion Loss			1.7		dB	
Main Line VSWR			1.4			
Coupler Line VSWR			1.4			
Directivity			14		dB	
CW Peak				20		W
Peak Power				3000		W
Weight				90		g
Dimension(LxWxH)			111.8x 12.7 x17.8			mm


Order Information

Part Number	Description
ATM-C20-0R526	0.5-26.5GHz 20dB Directional Coupler With SMA Connectors

Consult factory for other connectors option

Dimension

Unit: mm/Degree

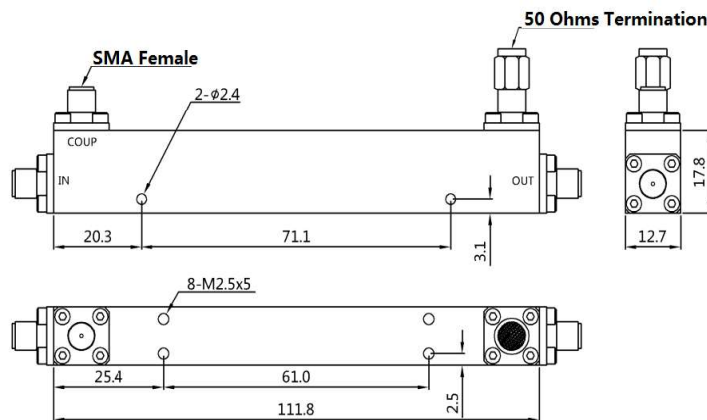

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063

Tel:+8621-5291 8556 Email:sales@atmicrowave.com www.atmicrowave.com