

## 30dB Directional Coupler

ATM-C30-0226

### Feature

- 2-26.5GHz Broadband Performance
- Excellent Coupling Flatness
- High Directivity
- Low VSWR



### Electrical Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Frequency Range(GHz )	Min	Typ	Max	Unit
Mean Coupling	2-26.5GHz		30 +/-0.6		dB
Flatness			+/-0.8		dB
Direct Line Inserion Loss			1		dB
Main Line VSWR			1.5		
Coupler Line VSWR			1.5		
Directivity			13		dB
CW Peak			20		W
Peak Power			3000		W
Weight			55		g
Dimension( LxWxH)			57.2x12.7x17.8		


### Order Information

Part Number	Description
ATM-C10-0226	2-26.5GHz 10dB Directional Coupler With SMA Female Connectors

Consult factory for other connectors option

### Dimension

Unit: mm/Degree

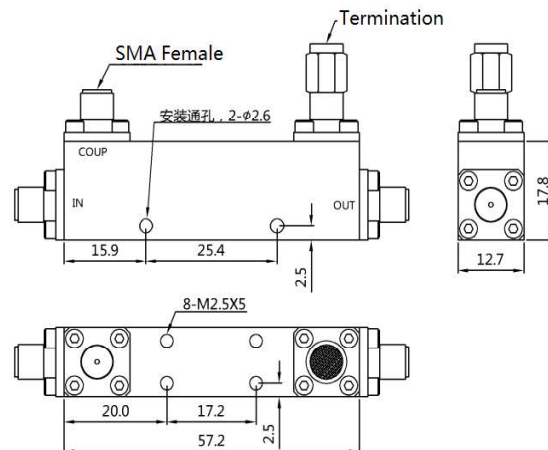

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063

Tel:+8621-5291 8556 Email:sales@atmicrowave.com www.atmicrowave.com