

9kHz-40GHz DC Block, Super Low End Frequency



Product Overview

AT-DCLF-29M29F is a broadband DC Block from 9kHz to 40GHz. The insertion loss is -1.2 dB with -15dB return loss performance

The RF1 and RF2 connectors are 2.92mm Female and Male respectively, other connector is available according to request. Input and output ports can be changed to use.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 9kHz-40GHz
- ✓ Insertion Loss: -0.8dB
- ✓ Max Voltage: 10V
- ✓ Power Handling: +27dBm

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System
- ✓ Optical Application

Key Features

Parameter	Min	Typical	Max
Frequency(Note)	4kHz	9kHz-40GHz	
Insertion Loss		-0.8dB	-1.5dB
Return Loss	-10dB	-15dB	
Capacitance		1uF	
Group Delay		100ps	
Max Voltage			+10V
Power Handling			+30dBm

Note: Only test from 9kHz due to the test limitation at present.





AT-DCLF-29M29F

9kHz-40GHz DC Block

Ordering

Part Number	Description
AT-DCLF-29M29F (Default)	RF1 2.92mm Female, RF2 2.92mm Male
AT-DCLF-29F29F	RF1 2.92mm Female, RF2 2.92mm Female
AT-DCLF-29M29M	RF1 2.92mm Male, RF2 2.92mm Male

Mechanical Information

Item	Description
RF1 Port	2.92mm Female
RF2 Port	2.92mm Male
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	20g
Size:	27.4X14X5 mm

Absolute Maximum Ratings Table


Parameter	Value
Voltage	+10V
RF Power	+27 dBm
Operating Temperature	-40 to +70C
Storage Temperature	-65 to +150C

Notes:


1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



Test Data:

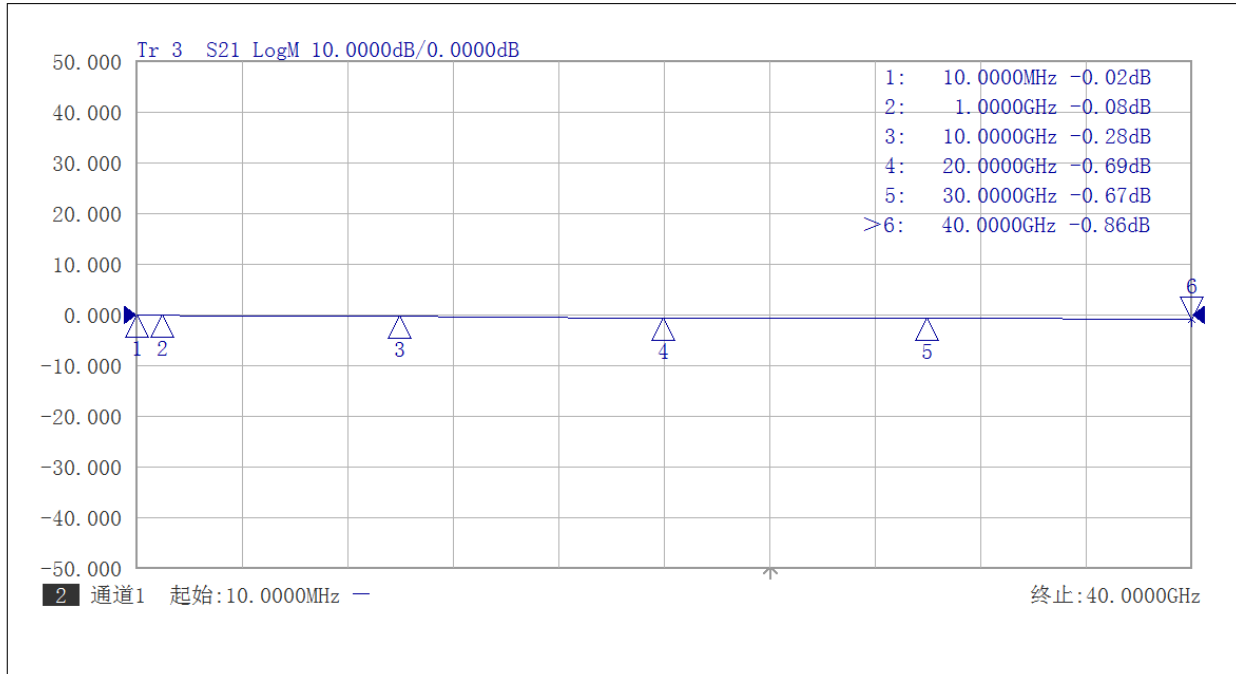


Insertion Loss vs Frequency 10MHz-40GHz

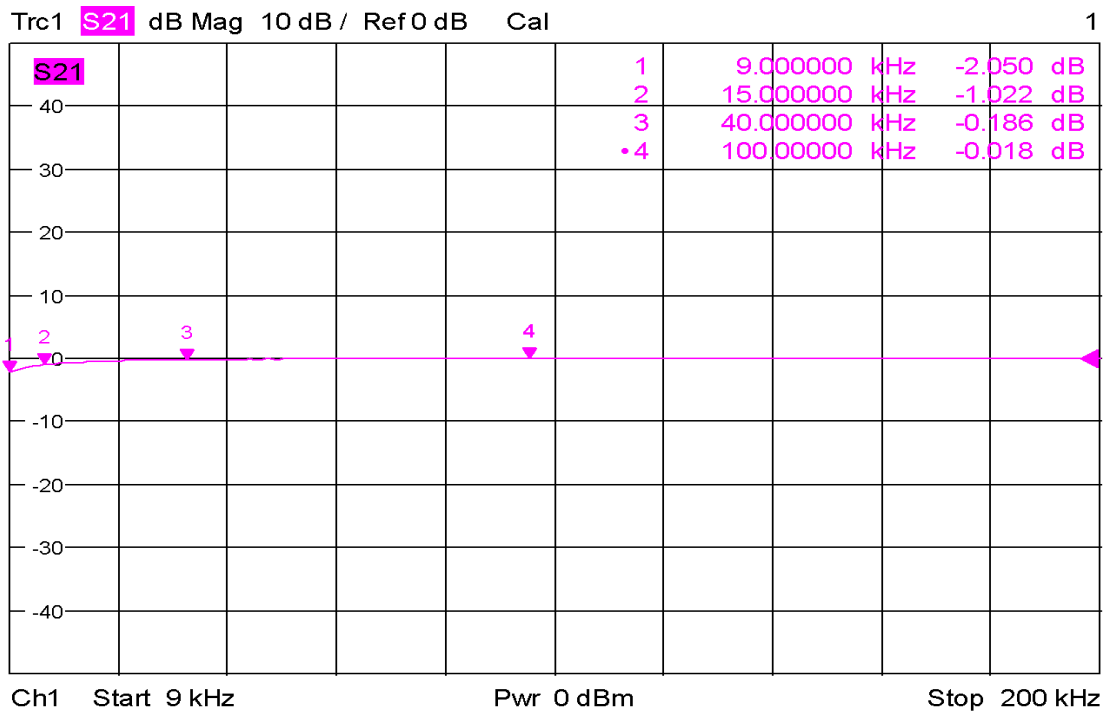


Date: 18.AUG.2021 11:08:15

Low End Frequency Insertion Loss



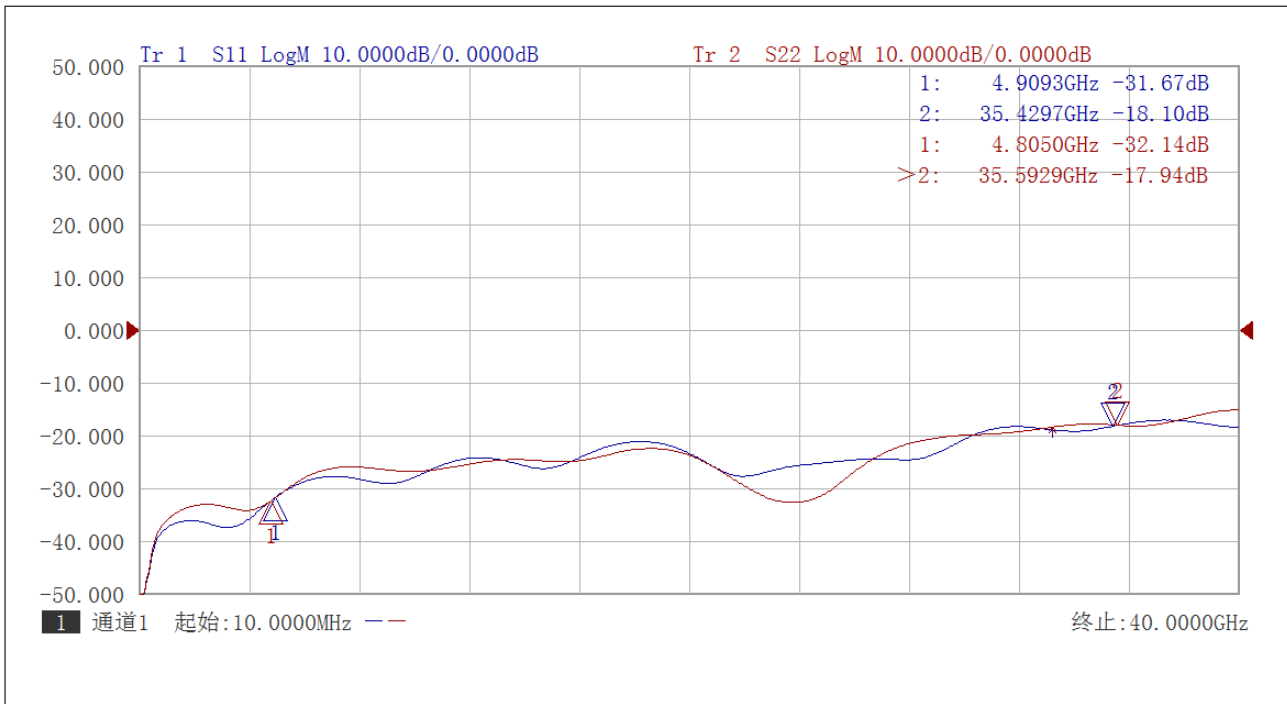


Input and Output Return Loss

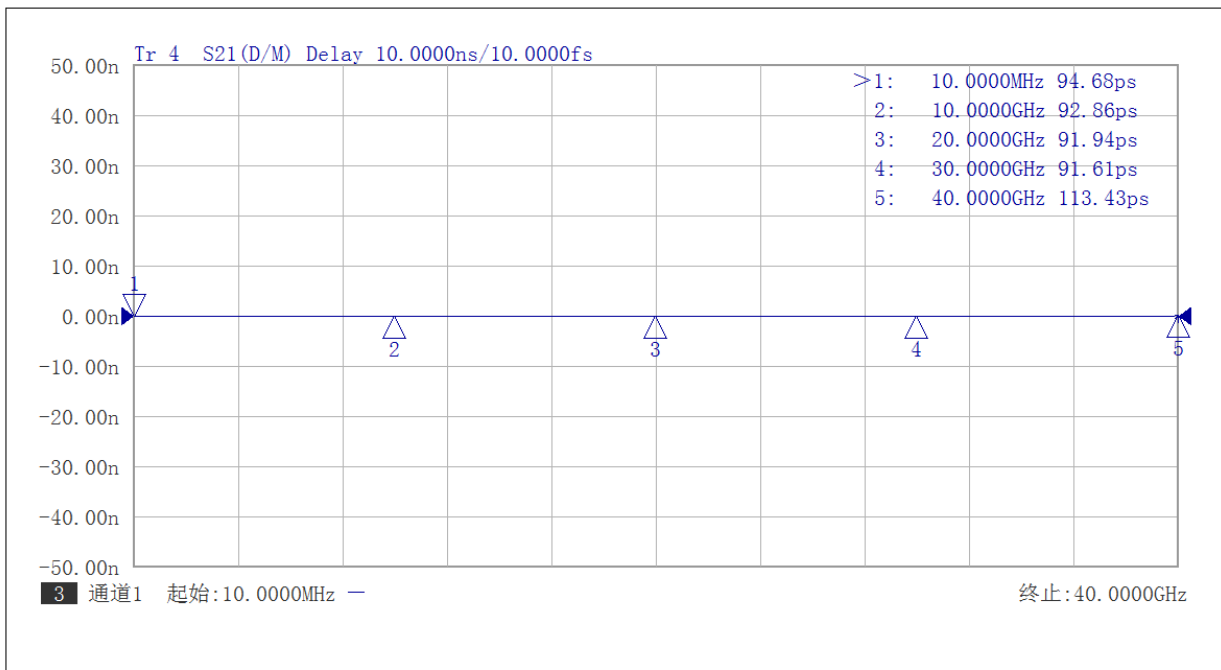

Group Delay vs Frequency



Dimension: (unit in mm)

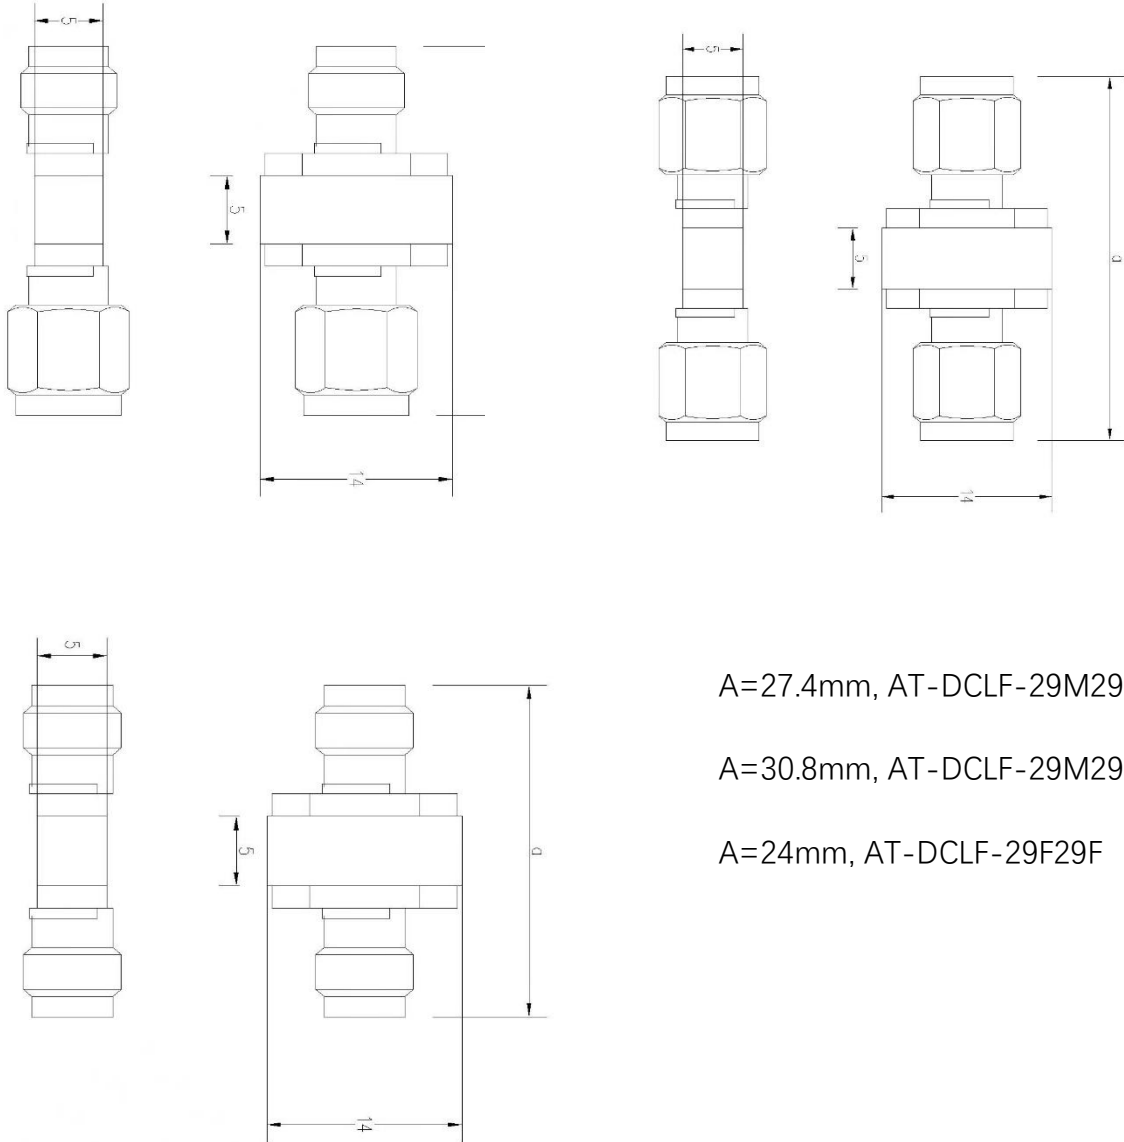

A=27.4mm, AT-DCLF-29M29F

A=30.8mm, AT-DCLF-29M29M

A=24mm, AT-DCLF-29F29F

