

AT-ERX-7886SIR-IX

Image Rejection Receiver, 78-86GHz, Gain 18dB

78-86GHz E2 Receiver, High Gain, NF=6dB

2021-01-03



Product Overview

AT-ERX-7886SIR-IX is high gain E-Band image rejection receiver. The receiver is integrated with High Performance GaAs MMIC chips, with Gain=18dB, NF=6dB. RF frequency range is 78-86GHz, LO range is 11.3-14.4GHz with x6 time inside. IF frequency range is 5.5-10GHz with 90 degree hybrid inside to combine IQ together.

The receiver is with compact size. LO/IF port is with SMA, and RF port is with standard WR-12.


More information, please visit www.atmicrowave.com

Feature

- Frequency: 78-86GHz
- Gain: 18dB typical \checkmark
- \checkmark NF: 6dB
- ✓ IF Range: 5.5-10GHz
- Single Power Supply

Application

- E band Imaging
- FOD (Foreigner Objects Debris)
- **Test Equipment**
- ROF (RF Over Fiber)
- Radar System

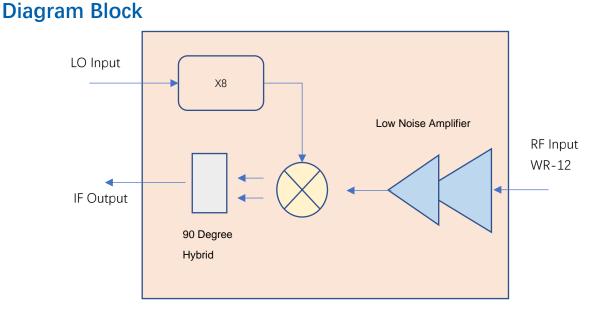



Shanghai AT Microwave Limited Tel:021-6229 1233 Email:sales@atmicrowave.com www.atmicrowave.com

\checkmark



AT-ERX-7886SIR-IX

Image Rejection Receiver, 78-86GHz, Gain 18dB

Key Features

Parameter	Min	Typical	Max
RF Frequency		78-86GHz	
Input Power		-40 dBm	-15dBm
Input P1dB		-30dBm	
LO Frequency	11.3GHz		14.4GHz
LO Multiplier Factor		X6	
LO Power	+4	+5dBm	+8dBm
IF Frequency		5.5-10GHz	
RF to IF Gain	15	18 dB	
NF		6 dB	8dB
Image Rejection	15	20dB	
Drain Power Supply		+5	+8V
Current		300mA	
Spec Temp		+25C	

Note:

 Low LO application only, which means LO frequency must be always lower than RF Frequency as there is 88 degree at IF port to achieve imaging rejection.

 \checkmark High LO module is available according to request.

Mechanical Information

Item	Description
RF Port	WR-12
IF Port	SMA Female
LO Port	SMA Female
Finish	Gold Plated
Weight (Without Heatsink)	225g
Size:	75x40x20mm



_ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _



Image Rejection Receiver, 78-86GHz, Gain 18dB

Absolute Maximum Ratings Table

Parameter	Value	
Drain Supply	+9V	
RF Input Power	+10 dBm	
LO Input Power	+15dBm	
Operating Temperature	0 to +50C	
Storage Temperature	-65 to +150C	

Notes:

- 1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
- 2. This data is only for reference, not for guaranteed specifications.
- 3. Please contact AT Microwave team to make sure you have the most current data.

Dimension (unit mm)

