

AT-LNA-0020-1503

50kHz-20GHz Low Noise Amplifier

50kHz-20GHz Low Noise Amplifier



Product Overview

AT-LNA-0020-1503 is high gain low noise amplifier with 15dB gain in the frequency of 50kHz-20GHz. The DC power requirement is +12V/80mA. The module is with SMA connector, which is compatible with 2.92mm.

The amplifier can also be used as for optical modulator driver due the to excellent low frequency performance down to 50kHz.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 50kHz-20GHz
- ✓ Small signal gain: 15dB
- ✓ NF=3dB
- ✓ Vout=4.48Vpp

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ Optical Modulator Driver
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency		50kHz-20GHz	
Gain	13	15 dB	
NF (0.1-20GHz)		3dB	5
Input Power		-10dBm	0dBm
P1dB		+15dBm	
Psat		+16dBm	
Output Vpp		4.48Vpp	
Drain Supply	+8V	+12V	+15V
Current		80 mA	
Input Return Loss		-10dB	
Output Return Loss		-10dB	
Spec Temp		25C	

Shanghai AT Microwave Limited

Tel:021-6229 1228

Email:sales@atmicrowave.com

www.atmicrowave.com





AT-LNA-0020-1503

50kHz-20GHz Low Noise Amplifier

Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	SMA Female
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	50g
Size:	30x30x9.5 mm

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+16V
RF Input Power	+20 dBm
Input Vpp	3.56Vpp
Operating Temperature(note)	-20 to + 70C
Storage Temperature	-65 to +150C

Note: -40 to +85C is available according to request.


Caution:

Please pay attention to the case temperature. If case temperature exceed higher than +50C, heat sink and fan are required, or the amplifier may be damaged.

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data






AT-LNA-0020-1503

50kHz-20GHz Low Noise Amplifier

Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

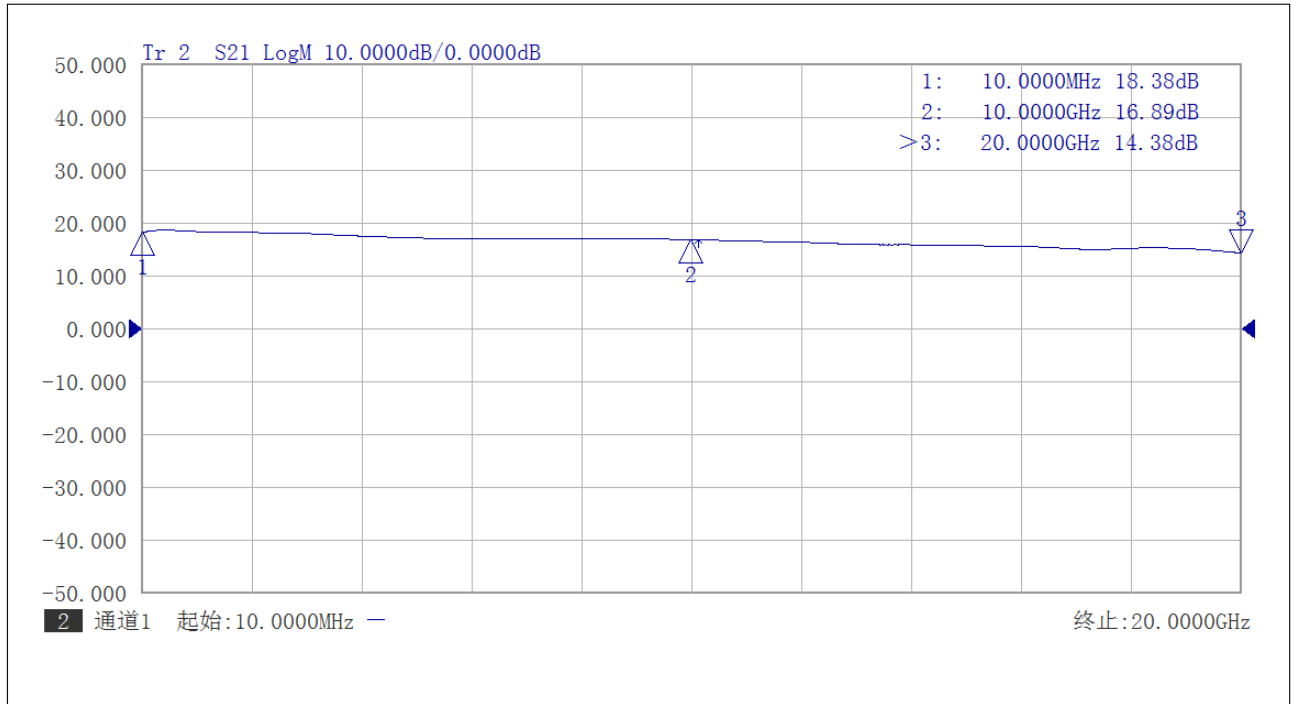


Gain vs Frequency 10MHz-20GHz




Gain vs Frequency 50kHz-1MHz



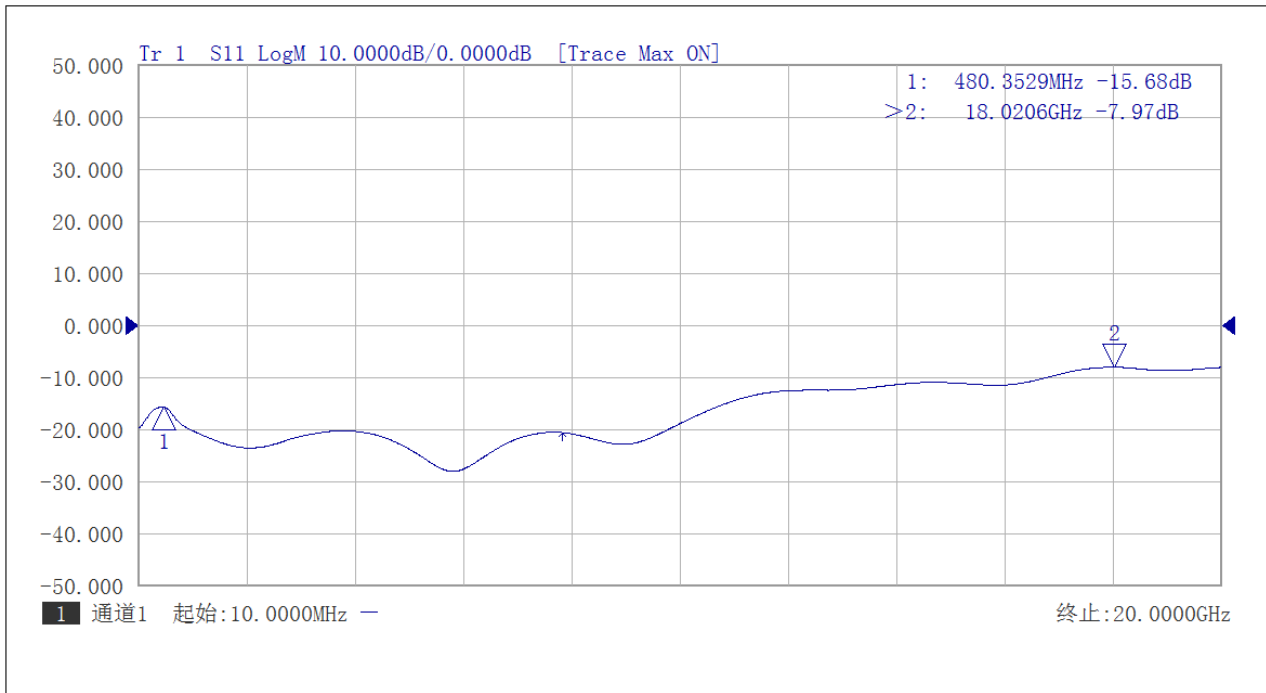


Input Return Loss vs Frequency

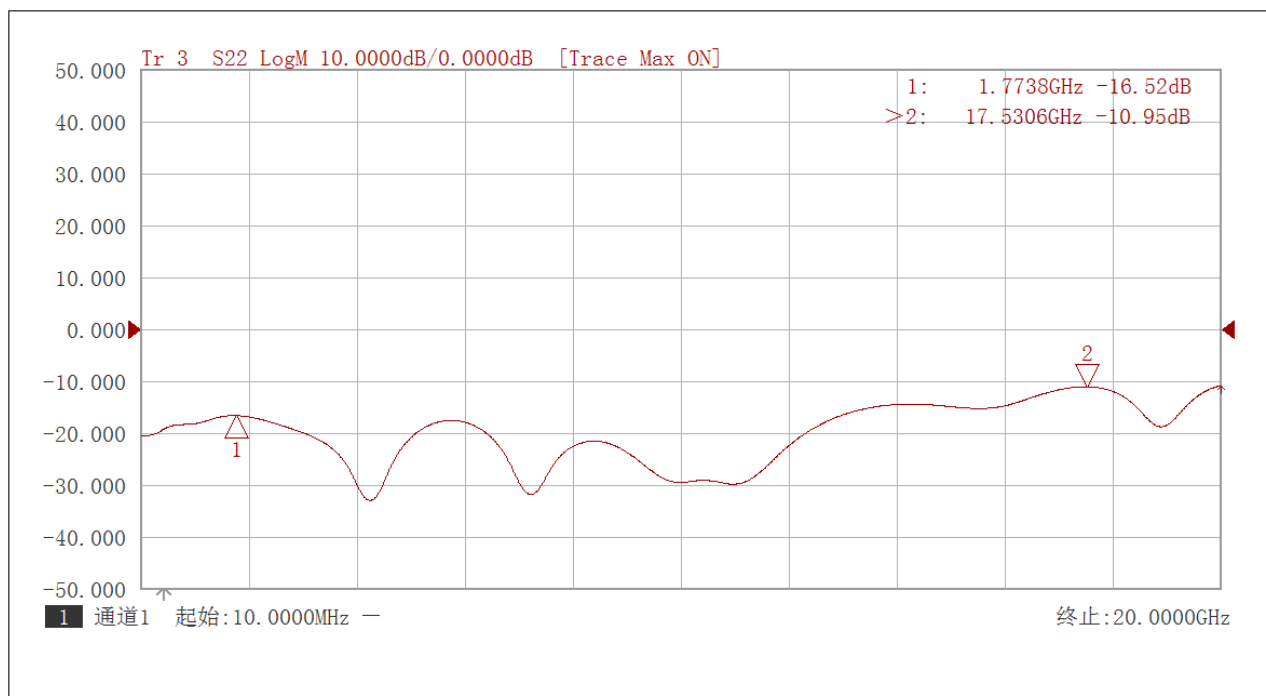


Output Return Loss vs Frequency






AT-LNA-0020-1503

50kHz-20GHz Low Noise Amplifier

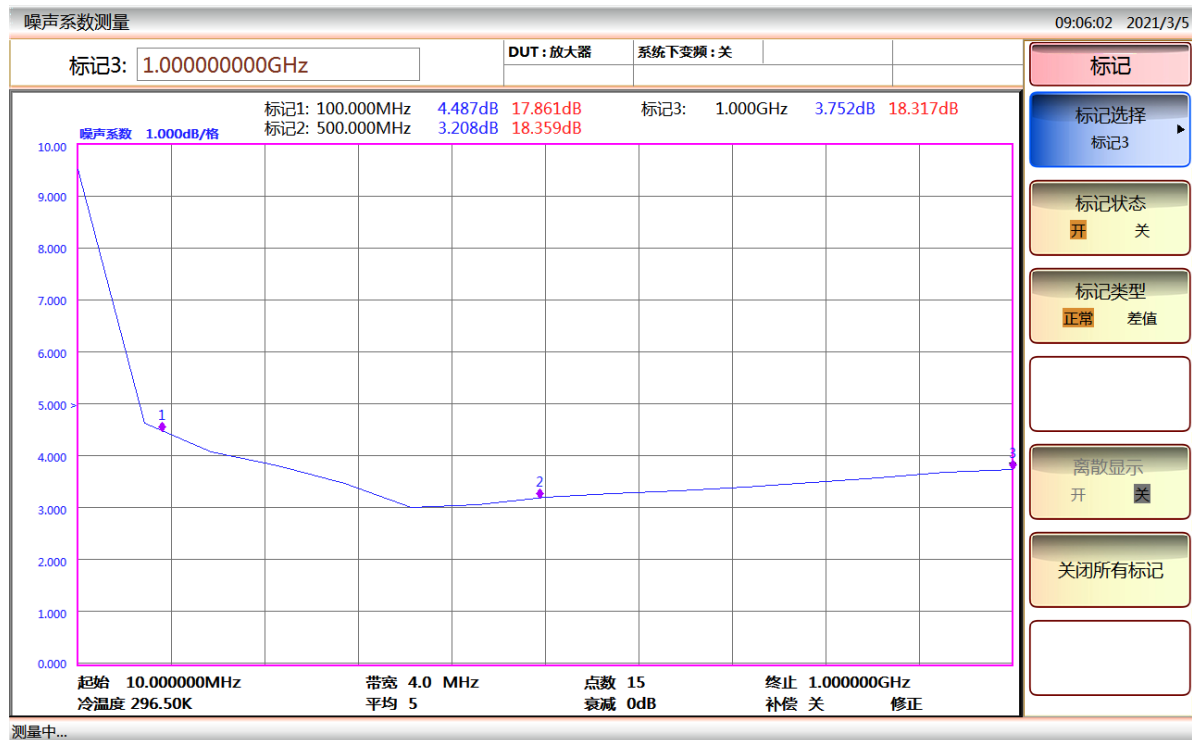

NF vs Frequency 10MHz-1GHz

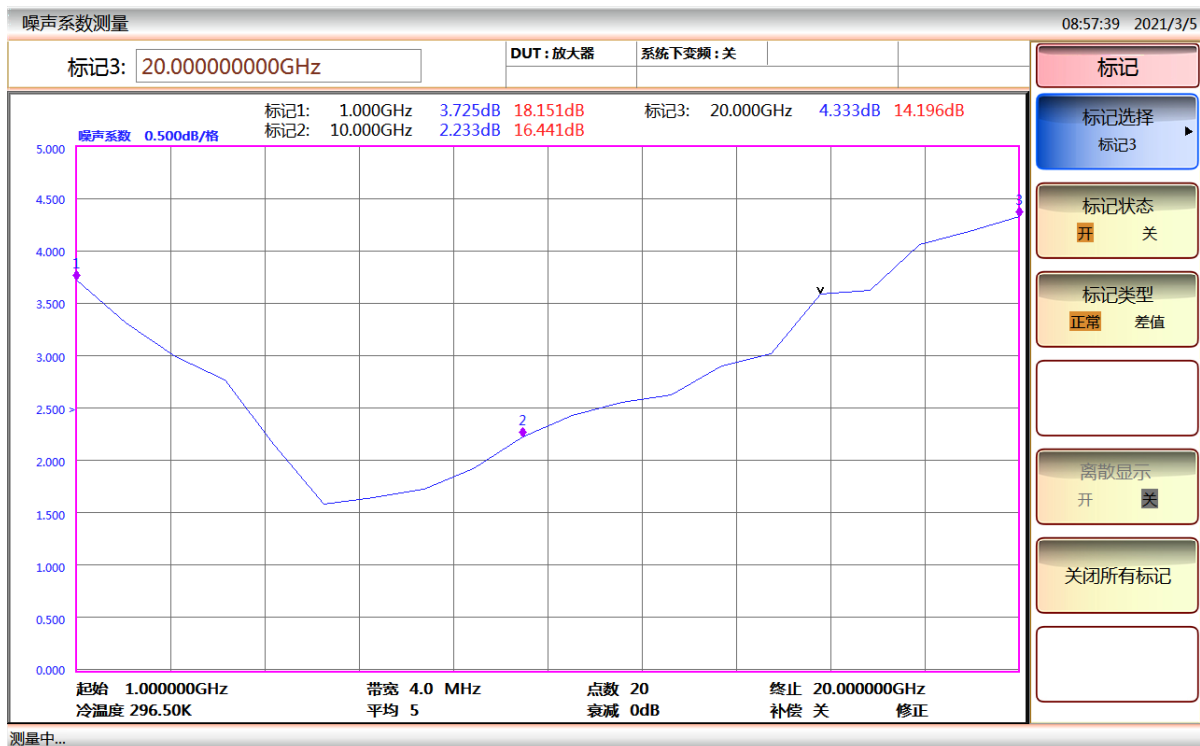

NF vs Frequency 1-20GHz


Shanghai AT Microwave Limited

Tel:021-6229 1228

Email:sales@atmicrowave.com


www.atmicrowave.com





AT-LNA-0020-1503


50kHz-20GHz Low Noise Amplifier

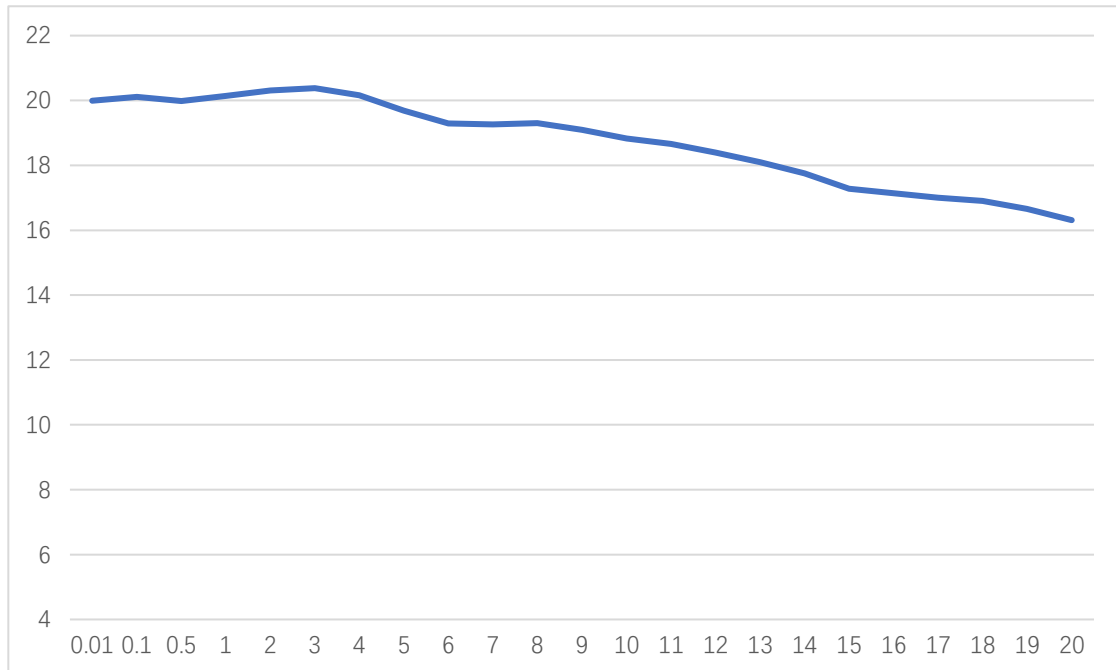


Psat vs Frequency



Dimension: (unit in mm)

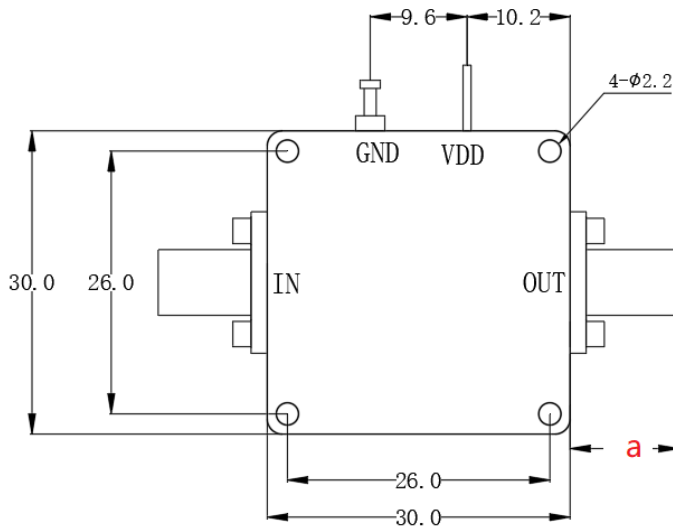

In millimetres

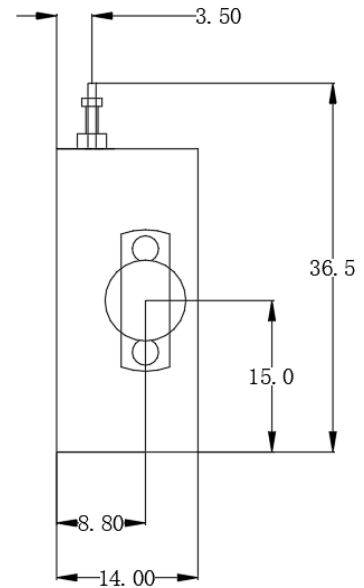

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

