

50kHz-20GHz Low Noise Amplifier



Product Overview

AT-LNA-0020-1503X is high gain low noise amplifier with 15dB gain in the frequency of 50kHz-20GHz. The DC power requirement is +12V/80mA. The module is with SMA connector, which is compatible with 2.92mm.

The amplifier can also be used as for optical modulator driver due the to excellent low frequency performance down to 50kHz.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 50kHz-20GHz
- ✓ Small signal gain: 15dB
- ✓ NF=3dB
- ✓ Vout=4.48Vpp

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ Optical Modulator Driver
- ✓ Radar System

Key Features

| Parameter | Min | Typical | Max |
|--------------------|-----|-------------|------|
| Frequency | | 50kHz-20GHz | |
| Gain | 13 | 15 dB | |
| NF (0.1-20GHz) | | 3dB | 5 |
| Input Power | | -10dBm | 0dBm |
| P1dB | | +15dBm | |
| Psat | | +16dBm | |
| Output Vpp | | 4.48Vpp | |
| Drain Supply | +8V | +12V | +15V |
| Current | | 80 mA | |
| Input Return Loss | | -10dB | |
| Output Return Loss | | -10dB | |
| Spec Temp | | 25C | |





AT-LNA-0020-1503X

50kHz-20GHz Low Noise Amplifier

Mechanical Information

| Item | Description |
|---------------------------|--------------|
| Input Port | SMA Female |
| Output Port | SMA Female |
| Case Material | Copper |
| Finish | Gold Plated |
| Weight (Without Heatsink) | 50g |
| Size: | 30x30x9.5 mm |

Absolute Maximum Ratings Table

| Parameter | Value |
|-----------------------------|--------------|
| Drain Supply | +16V |
| RF Input Power | +20 dBm |
| Input Vpp | 3.56Vpp |
| Operating Temperature(note) | -20 to + 70C |
| Storage Temperature | -65 to +150C |

Note: -40 to +85C is available according to request.

Caution:

Please pay attention to the case temperature. If case temperature exceed higher than +50C, heat sink and fan are required, or the amplifier may be damaged.


Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data



Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

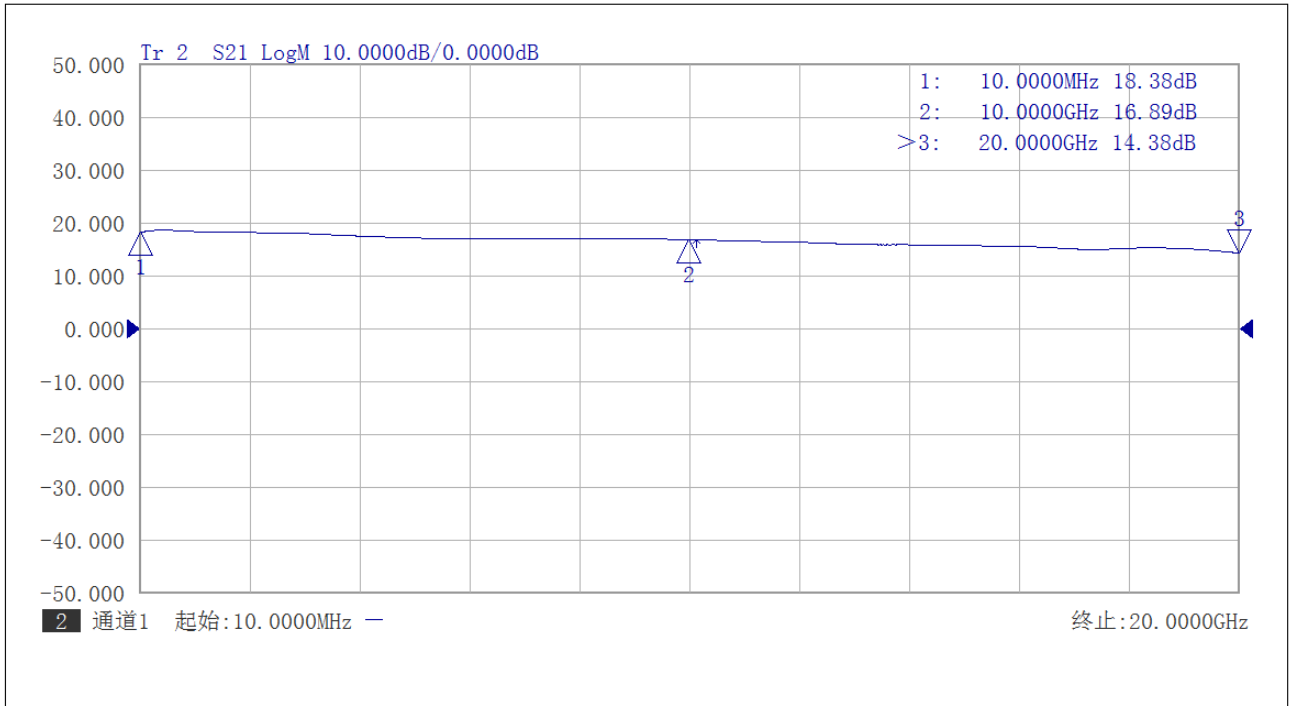


Gain vs Frequency 10MHz-20GHz




Gain vs Frequency 50kHz-1MHz



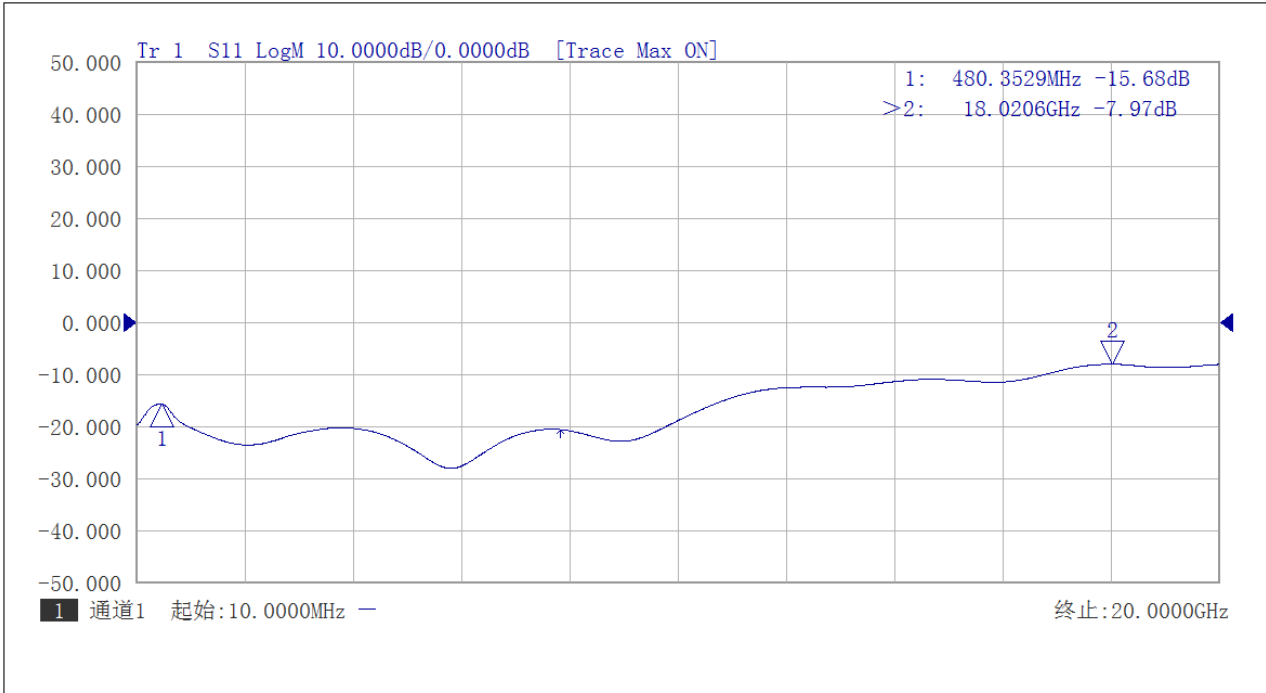


Input Return Loss vs Frequency

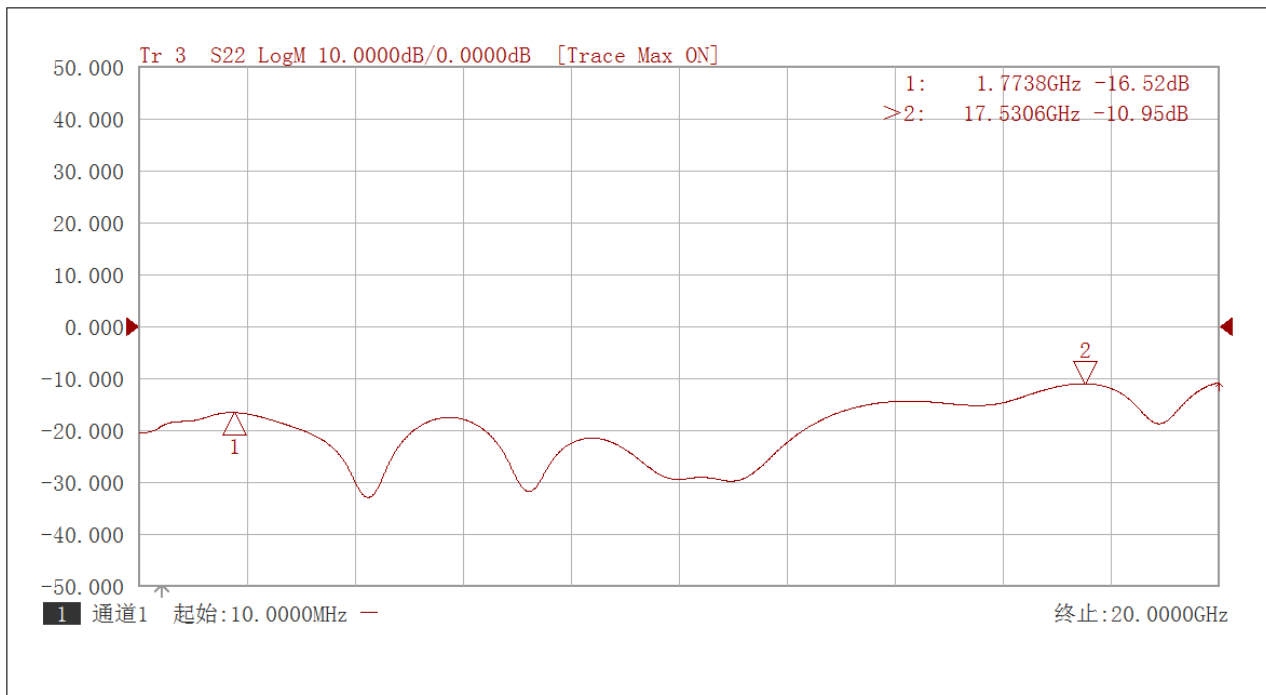


Output Return Loss vs Frequency



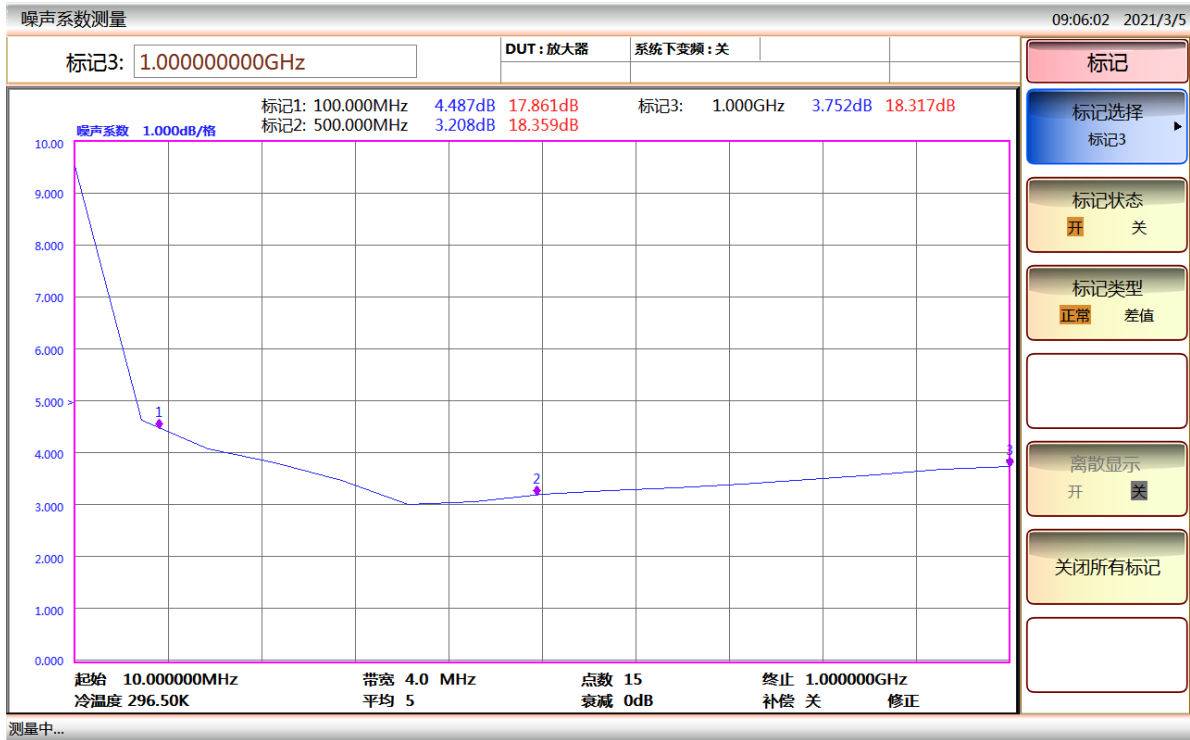


NF vs Frequency 10MHz-1GHz

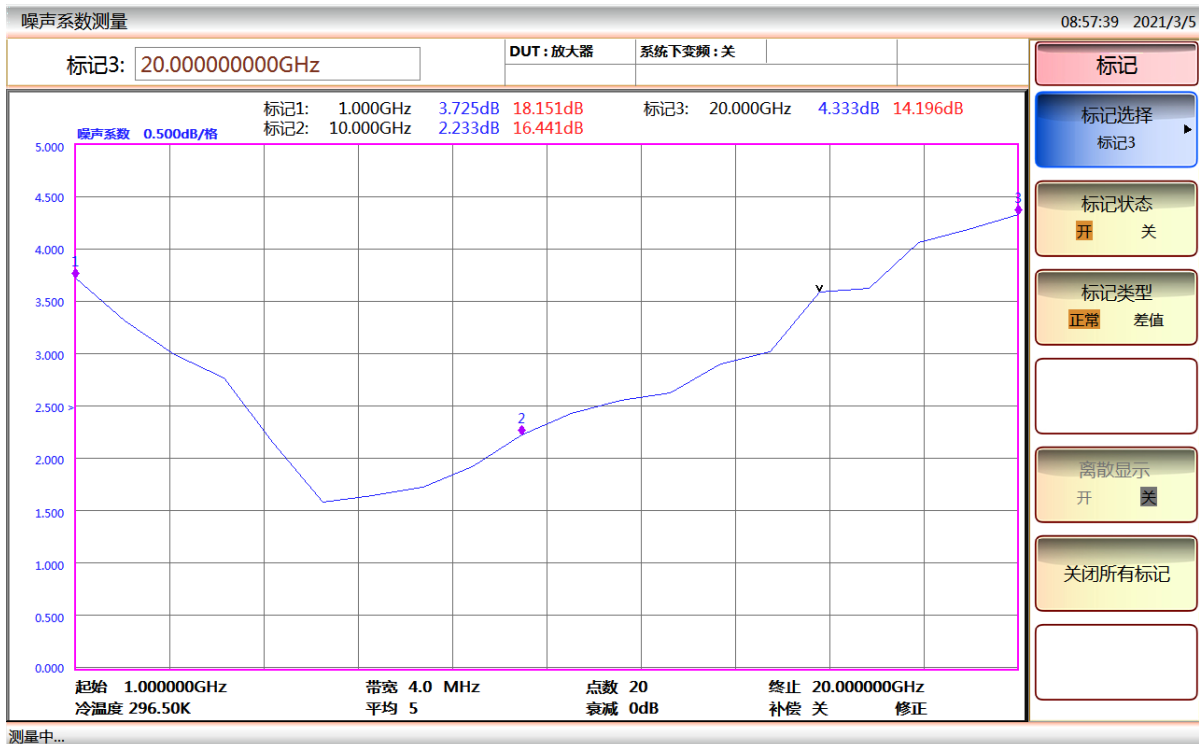


NF vs Frequency 1-20GHz



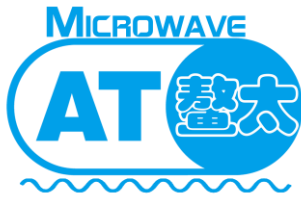

AT-LNA-0020-1503X


50kHz-20GHz Low Noise Amplifier

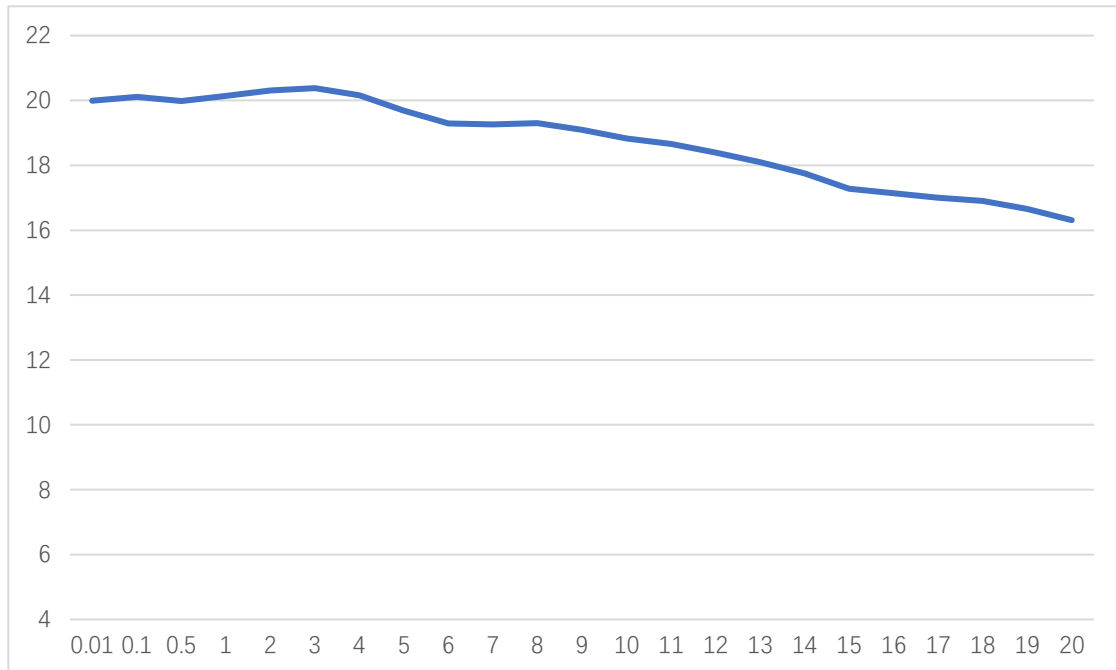


Psat vs Frequency



Dimension: (unit in mm)

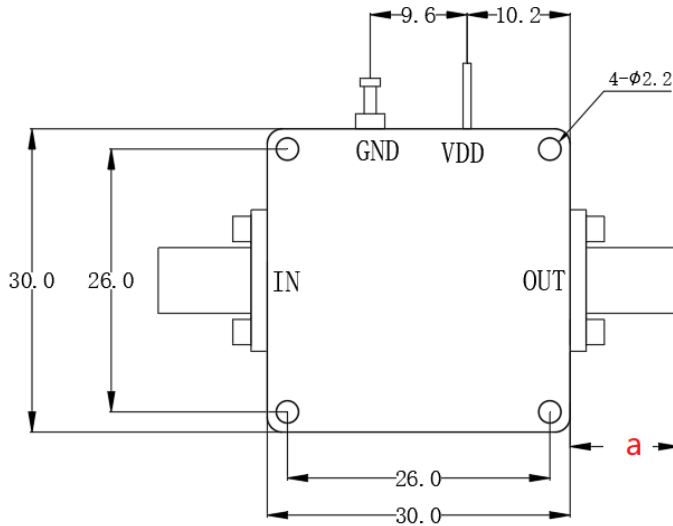


In millimetres

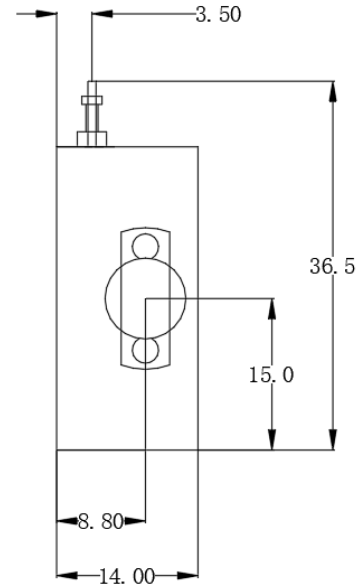

| | <26.5GHz | <40GHz | <50GHz | <67GHz |
|------------|----------|--------|--------|--------|
| Connector | SMA | 2.92mm | 2.4mm | 1.85mm |
| Lenth of a | 9.4mm | 9.5mm | 10.8mm | 11.3mm |

Note: Female Default. Contact with us for other types.



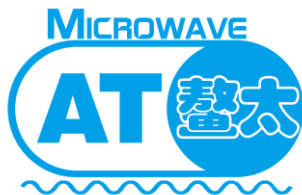

AT-LNA-0020-1503X

50kHz-20GHz Low Noise Amplifier

Vpp vs dBm at 50 Ohms System

| dBm | Vpp | Vrms | Power (W) | dBm | Vpp | Vrms | Power (W) |
|-----|--------|-------|-------------|-----|----------|----------|-------------|
| 50 | 200.00 | 70.71 | 100.00 | 14 | 3.17 | 1.12 | 2.51E-02 |
| 49 | 178.25 | 63.02 | 79.43 | 13 | 2.83 | 1.00 | 2.00E-02 |
| 48 | 158.87 | 56.17 | 63.10 | 12 | 2.52 | 0.89 | 1.58E-02 |
| 47 | 141.59 | 50.06 | 50.12 | 11 | 2.24 | 0.79 | 1.26E-02 |
| 46 | 126.19 | 44.62 | 39.81 | 10 | 2.00 | 0.71 | 1.00E-02 |
| 45 | 112.47 | 39.76 | 31.62 | 9 | 1.78 | 0.63 | 7.94E-03 |
| 44 | 100.24 | 35.44 | 25.12 | 8 | 1.59 | 0.56 | 6.31E-03 |
| 43 | 89.34 | 31.59 | 19.95 | 7 | 1.42 | 0.50 | 5.01E-03 |
| 42 | 79.62 | 28.15 | 15.85 | 6 | 1.26 | 0.45 | 3.98E-03 |
| 41 | 70.96 | 25.09 | 12.59 | 5 | 1.12 | 0.40 | 3.16E-03 |
| 40 | 63.25 | 22.36 | 10.00 | 4 | 1.00 | 0.35 | 2.51E-03 |
| 39 | 56.37 | 19.93 | 7.94 | 3 | 0.89 | 0.32 | 2.00E-03 |
| 38 | 50.24 | 17.76 | 6.31 | 2 | 0.80 | 0.28 | 1.58E-03 |
| 37 | 44.77 | 15.83 | 5.01 | 1 | 0.71 | 0.25 | 1.26E-03 |
| 36 | 39.91 | 14.11 | 3.98 | 0 | 0.63 | 0.22 | 1.00E-03 |
| 35 | 35.57 | 12.57 | 3.16 | -1 | 0.56 | 0.20 | 7.94E-04 |
| 34 | 31.70 | 11.21 | 2.51 | -2 | 0.50 | 0.18 | 6.31E-04 |
| 33 | 28.25 | 9.99 | 2.00 | -3 | 0.45 | 0.16 | 5.01E-04 |
| 32 | 25.18 | 8.90 | 1.58 | -4 | 0.40 | 0.14 | 3.98E-04 |
| 31 | 22.44 | 7.93 | 1.26 | -5 | 0.36 | 0.13 | 3.16E-04 |
| 30 | 20.00 | 7.07 | 1.00 | -6 | 0.32 | 0.11 | 2.51E-04 |
| 29 | 17.83 | 6.30 | 0.79 | -7 | 0.28 | 9.99E-02 | 2.00E-04 |
| 28 | 15.89 | 5.62 | 0.63 | -8 | 0.25 | 8.90E-02 | 1.58E-04 |
| 27 | 14.16 | 5.01 | 0.50 | -9 | 0.22 | 7.93E-02 | 1.26E-04 |
| 26 | 12.62 | 4.46 | 0.40 | -10 | 0.20 | 7.07E-02 | 1.00E-04 |
| 25 | 11.25 | 3.98 | 0.32 | -11 | 0.18 | 6.30E-02 | 7.94E-05 |
| 24 | 10.02 | 3.54 | 0.25 | -12 | 0.16 | 5.62E-02 | 6.31E-05 |
| 23 | 8.93 | 3.16 | 0.20 | -13 | 0.14 | 5.01E-02 | 5.01E-05 |
| 22 | 7.96 | 2.82 | 0.16 | -14 | 0.13 | 4.46E-02 | 3.98E-05 |
| 21 | 7.10 | 2.51 | 0.13 | -15 | 0.11 | 3.98E-02 | 3.16E-05 |
| 20 | 6.32 | 2.24 | 0.10 | -16 | 0.10 | 3.54E-02 | 2.51E-05 |
| 19 | 5.64 | 1.99 | 7.94E-02 | -17 | 8.93E-02 | 3.16E-02 | 2.00E-05 |
| 18 | 5.02 | 1.78 | 6.31E-02 | -18 | 7.96E-02 | 2.82E-02 | 1.58E-05 |
| 17 | 4.48 | 1.58 | 5.01E-02 | -19 | 7.10E-02 | 2.51E-02 | 1.26E-05 |
| 16 | 3.99 | 1.41 | 3.98E-02 | -20 | 6.32E-02 | 2.24E-02 | 1.00E-05 |
| 15 | 3.56 | 1.26 | 3.16E-02 | -21 | 5.64E-02 | 1.99E-02 | 7.94E-06 |

