

AT-LNA-5565-3505V

55-65GHz Low Noise Amplifier

55-65GHz Broadband Low Noise Amplifier



Product Overview

AT-LNA-5565-3505V is Low Noise Amplifier with 5dB Noise Figure in the frequency of 55-65GHz. The DC power requirement is +5V/200mA. The module is with 1.85mm Female

AT Microwave can provide all kinds of coaxial low noise amplifiers, with frequency from 0.01-65GHz, gain from 20 to 65dB, Pout from +5 to +27dBm, and connectors from SMA to 1.85mm.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 55-65GHz
- ✓ Small signal gain: 35dB
- ✓ Noise Figure: 5dB
- ✓ Single Power Supply

Application

- ✓ V Band Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency		55-65GHz	
Gain	33dB	35dB	
Gain Flatness		+/- 3dB	+/- 5Db
1NF		5dB	8
P1dB		+8dBm	
Psat		+10dBm	
Drain Supply		+5V	+8V
Current		200 mA	
Input Return Loss		-5 dB	
Output Return Loss		-5 dB	
Spec Temp		25C	

Shanghai AT Microwave Limited

Tel:021-6229 1235

Email:sales@atmicrowave.com

www.atmicrowave.com





AT-LNA-5565-3505V

55-65GHz Low Noise Amplifier

Mechanical Information

Item	Description
Input Port	1.85mm Female
Output Port	1.85mm Female
Case Material	Copper
Finish	Gold Plated
Package Sealing	Epoxy Sealed
Weight (Without Heatsink)	50g
Size:	30x30x14 mm

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+9V
RF Input Power	-10dBm
Operating Temperature	-20 to +70C
Storage Temperature	-65 to +150C

Caution:


Please pay attention to the case temperature. If case temperature exceed higher than +50C, heat sink and fan are required, or the amplifier may be damaged.

Notes:


1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



Dimension: (unit in mm)

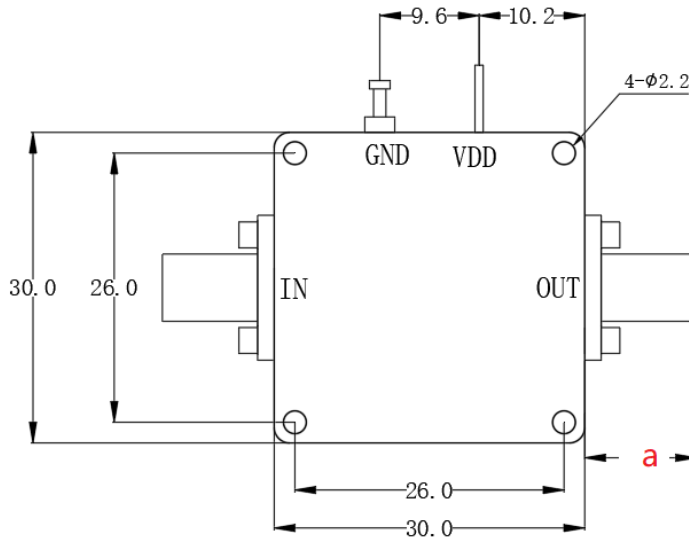

In millimetres

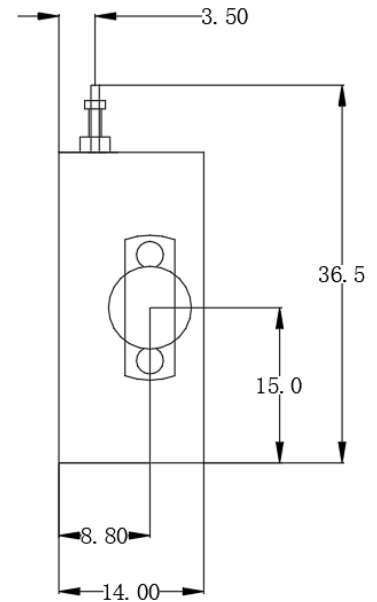

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

