

# AT-LNA-65115-3804T

65-115GHz 38dB Gain Low Noise Amplifier

## W Band Low Noise Amplifier, WR-10 High Gain=38dB, Low NF=4dB

2022-10-1



### Product Overview

AT-LNA-65115-3804T is a low noise amplifier operating in the 65-115 GHz frequency range. The LNA is packaged in a waveguide module using industry standard WR-10.

GaAs MMIC technology LNA Chip is used, which ensures reliable and repeatable unit-to-unit result.

More information, please visit [www.atmicrowave.com](http://www.atmicrowave.com)

### Advantages

- ✓ Frequency: 65-115GHz
- ✓ Gain: 38dB
- ✓ NF: 4dB
- ✓ Single Supply

### Application

- ✓ W band Imaging
- ✓ FOD (Foreigner Objects Debris)
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

### Key Features

Parameter	Min	Typical	Max
Frequency		65-115GHz	
Gain	34dB	38dB	
Input Power		-40dBm	-10dBm
Noise Figure(75-110GHz)		4dB	6dB
P1dB		+1dBm	
Psat		+3dBm	
Drain Supply		+5V	+8V
Current		70mA	
Input Return Loss		-5dB	
Output Return Loss		-5dB	
Spec Temp		25C	

Shanghai AT Microwave Limited

Tel:021-6229 1233

Email:sales@atmicrowave.com

www.atmicrowave.com





# AT-LNA-65115-3804T

65-115GHz 38dB Gain Low Noise Amplifier

## Mechanical Information

Item	Description
Input Port	WR-10 UG-387/U-M Flange with anti-cocking Flange
Output Port	WR-10 UG-387/U-M Flange with anti-cocking Flange
Case Material	Copper
Finish	Gold Plated
Weight	130g
Size:	See outline

## Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+9V
RF Input Power	+0dBm
Operating Temperature	0 to +50C
Storage Temperature	-65 to +150C

## Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.


## Part Number Selection Guide

Item	Description
PN	Stand Module with DC Power Supply
<b>PN-LCBT</b>	<b>L</b> ow Cost, <b>C</b> ompact <b>B</b> ench- <b>T</b> op, +220V Supply with AC/DC Adapter




### Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

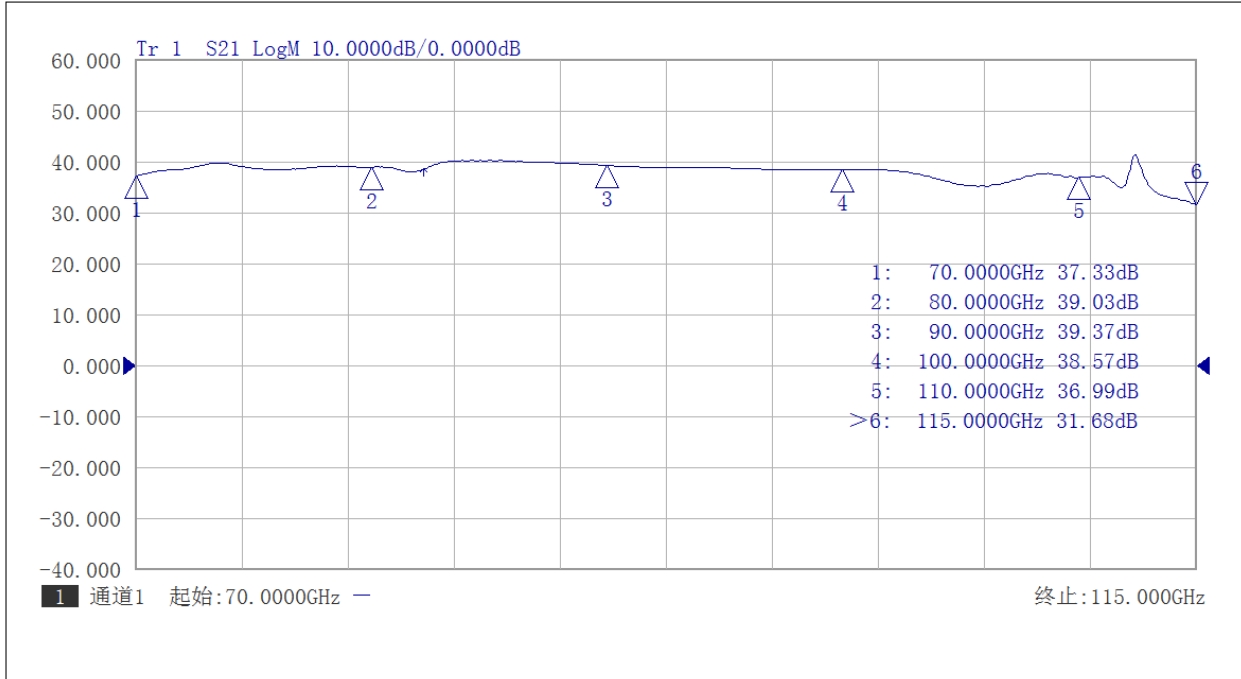


Gain vs Frequency 70-115GHz

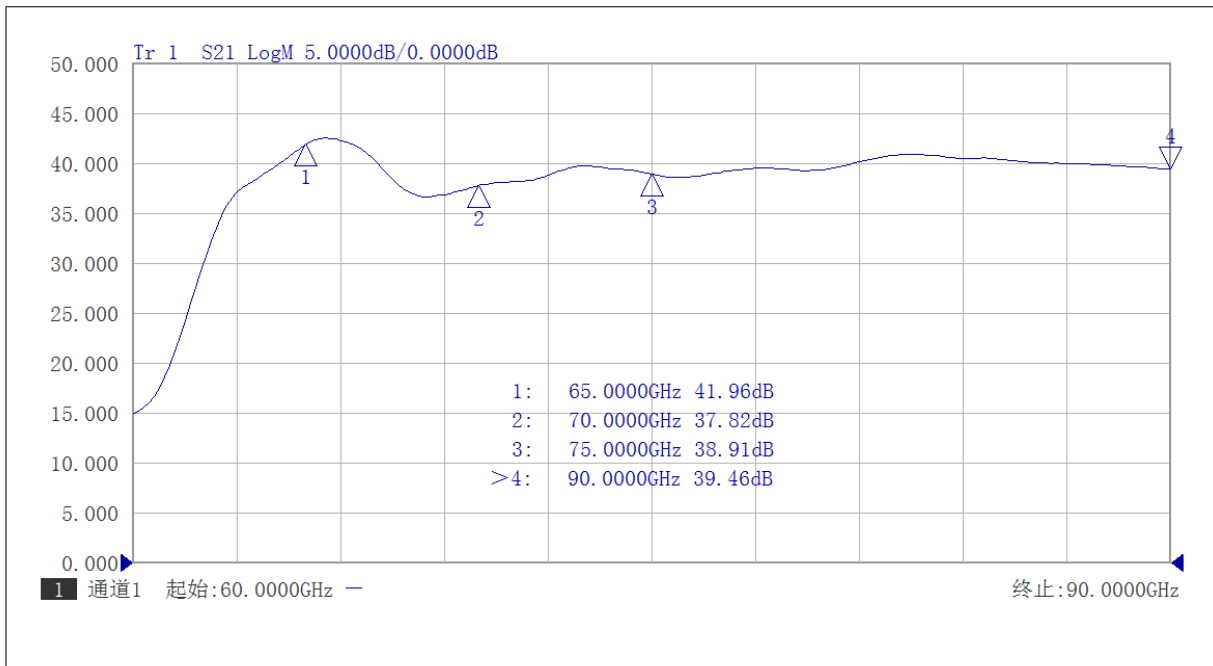


Gain vs Frequency 65-90GHz



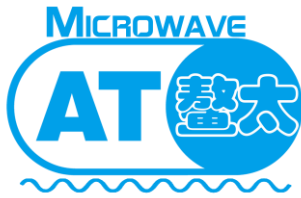


# AT-LNA-65115-3804T

65-115GHz 38dB Gain Low Noise Amplifier

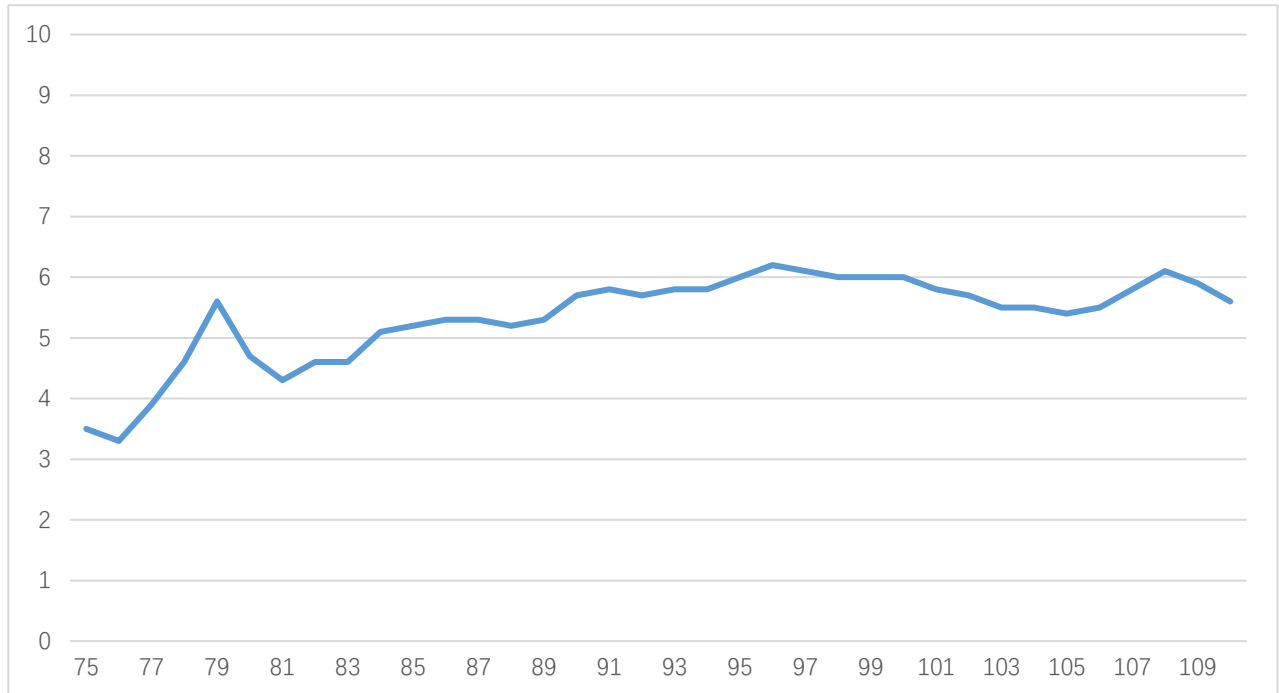

Psat vs Frequency

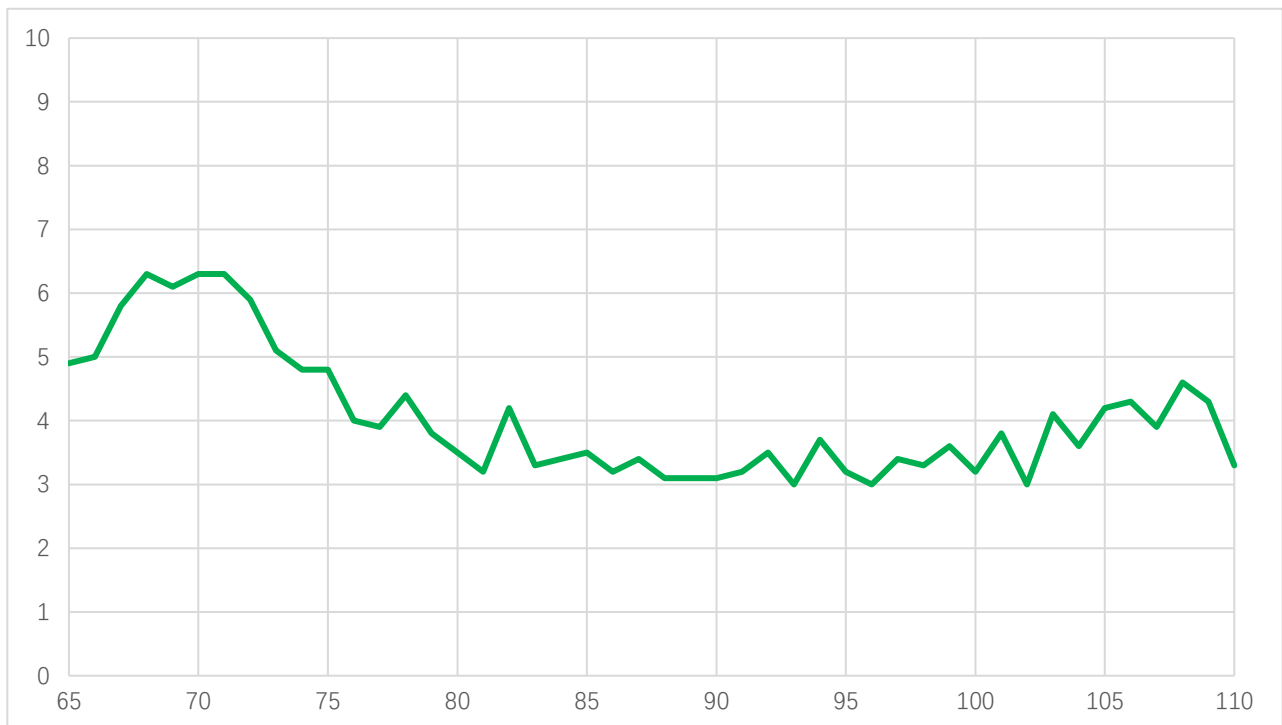

NF vs Frequency

Shanghai AT Microwave Limited

Tel:021-6229 1233

Email:sales@atmicrowave.com

www.atmicrowave.com



Dimension: (mm)

