



AT-LNA-75110-3804T

75-110GHz 38dB Gain Low Noise Amplifier

W Band Low Noise Amplifier, High Gain, Low NF

2020-12-07

High Gain=38dB, WR-10



Product Overview

AT-LNA-75110-3804T is a low noise amplifier operating in the 75-110 GHz frequency range. The LNA is packaged in a waveguide module using industry standard WR-10.

GaAs MMIC technology LNA Chip is used, which ensures reliable and repeatable unit-to-unit result.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 75-110GHz
- ✓ Gain: 38dB
- ✓ NF: 4dB
- ✓ Single Supply

Application

- ✓ W band Imaging
- ✓ FOD (Foreigner Objects Debris)
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency		75-110GHz	
Gain (75-105GHz)	36dB	38dB	
Input Power		-40dBm	-10dBm
Noise Figure		4dB	6dB
P1dB		+1dBm	
Psat		+3dBm	
Drain Supply		+5V	+8V
Current		70mA	
Input Return Loss		-5dB	
Output Return Loss		-5dB	
Spec Temp		25C	

Shanghai AT Microwave Limited

Tel:021-6229 1233

Email:sales@atmicrowave.com

www.atmicrowave.com





AT-LNA-75110-3804T

75-110GHz 38dB Gain Low Noise Amplifier

Mechanical Information

Item	Description
Input Port	WR-10
Output Port	WR-10
Case Material	Copper
Finish	Gold Plated
Weight	130g
Size:	See outline

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+9V
RF Input Power	+0dBm
Operating Temperature	0 to +50C
Storage Temperature	-65 to +150C

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.







AT-LNA-75110-3804T

75-110GHz 38dB Gain Low Noise Amplifier

Test Data:

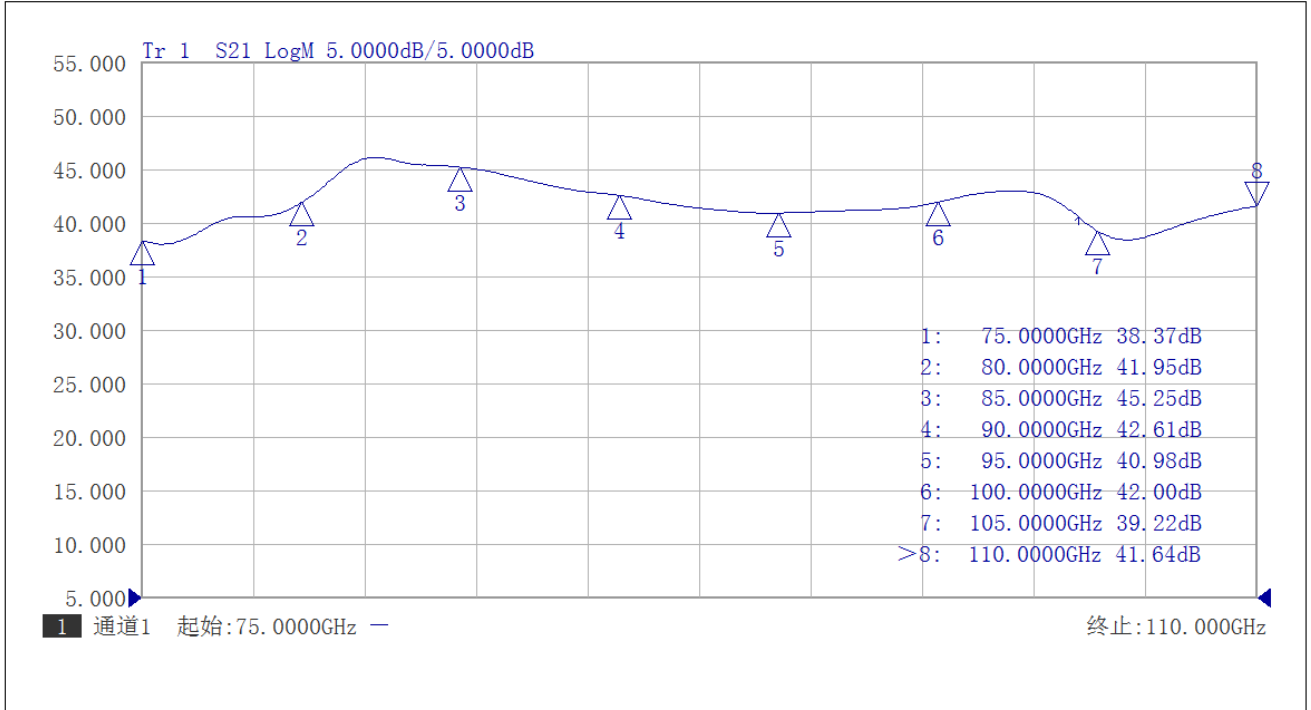

Gain vs Frequency

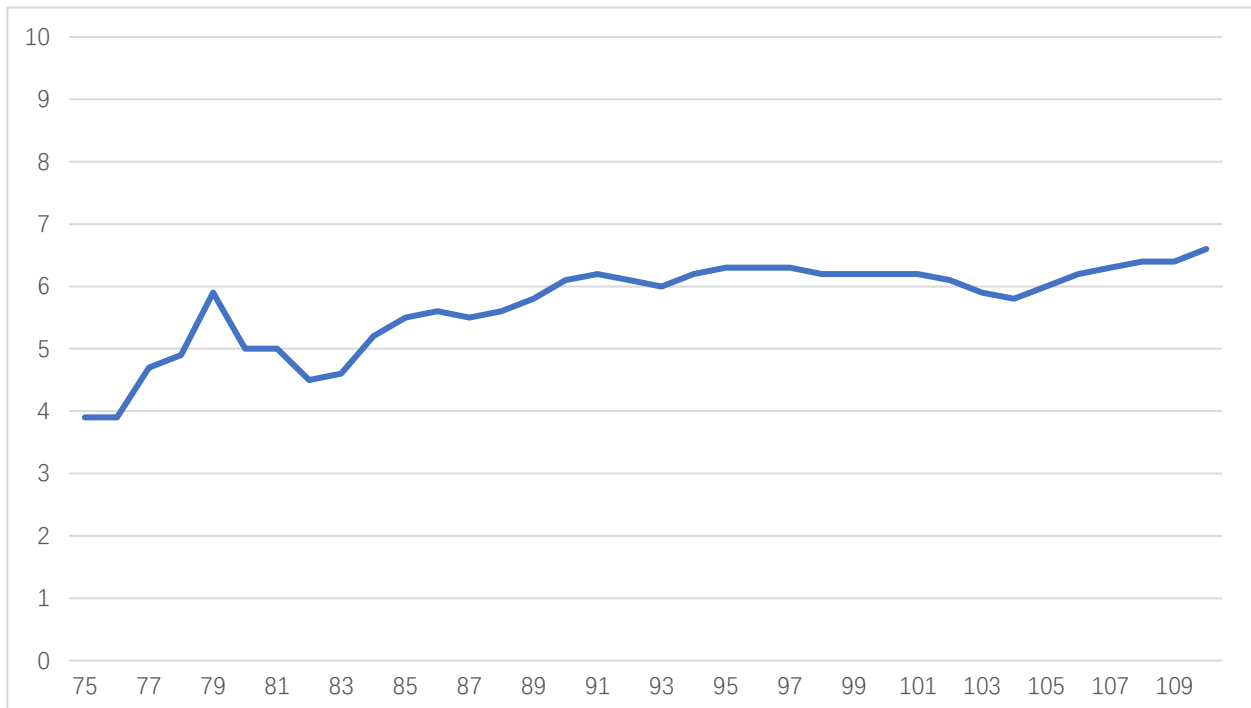

Psat vs Frequency

Shanghai AT Microwave Limited

Tel:021-6229 1233

Email:sales@atmicrowave.com

www.atmicrowave.com



Dimension: (mm)

