


AT-LPF-57-19:

2022-4-20

57GHz U Band Loss Pass Filter, WR-19

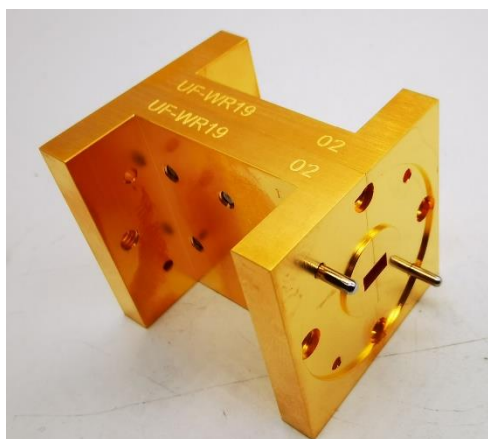

Product Overview

AT Microwave offers high performance band waveguide band-pass filter from 26.5-170GHz. Other frequency bands and rejection requirement can provide according to request.

Based on our excellent design work, precise machine tolerance and outstanding quality plating, we can provide band pass filter with low insertion loss, good return loss and high rejection at the same time.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Low Insertion Loss
- ✓ Good Return Loss
- ✓ High Stop Band Suppression
- ✓ Sharp Roll-Off

Application

- ✓ Automotive Radar Test
- ✓ FOD (Foreigner Objects Debris)
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Passband Frequency		40-57GHz	
Passband Insertion Loss		-1.0 dB	-2.5dB
Passband Return Loss	-8dB	-15 dB	
High End Rejection Frequency		61-75GHz	
Rejection Value	-30dB	-40dB	
Spec Temp		25C	





AT-LPF-57-19

U Band Waveguide Low-Pass Filter, WR-19

Mechanical Information


Item	Description
Input Port	WR-19
Output Port	WR-19
Case Material	Brass
Finish	Gold Plated
Weight	100g
Size:	See outline

Absolute Maximum Ratings Table

Parameter	Value
Operating Temperature	-40 to +85C
Storage Temperature	-65 to +150C

Simulation Result

Performance may vary slight from test and simulation

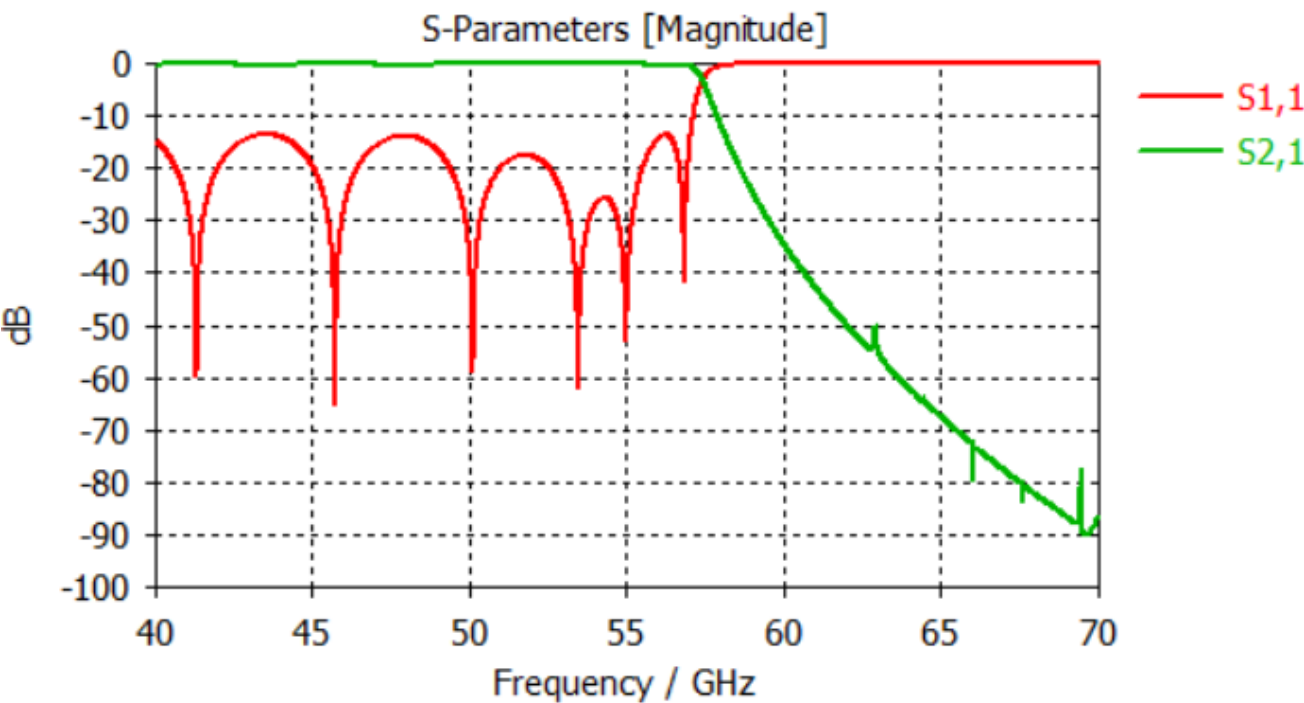

Dimension (mm)

