


# AT-PA-5766-2526VG-18F18F

57-66GHz Power Amplifier

## 57-66GHz Broadband Amplifier, +26dBm

2021-11-

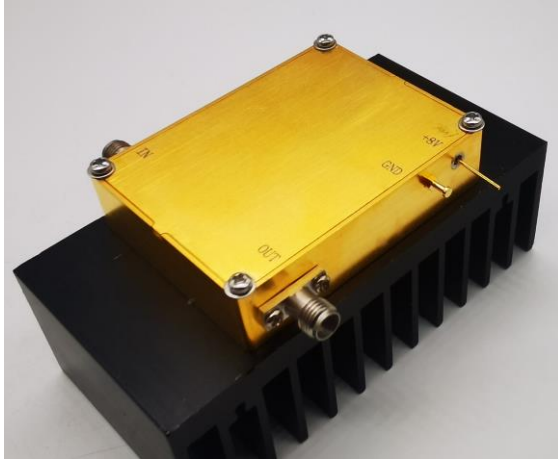

### Product Overview

AT-PA-5766-2526VG-18F18F is high gain power amplifier with +26dBm output power in the frequency of 57-66GHz. The DC power requirement is +5V/1.5A. The module is with 1.85mm connector.

The power amplifier has high gain, high linearity, low input/output return loss and flat gain response.

More information, please visit [www.atmicrowave.com](http://www.atmicrowave.com)

### Advantages

- ✓ Frequency: 57-66GHz
- ✓ Pout:+26dBm
- ✓ Small signal gain: 25dB
- ✓ Single Power Supply

### Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

## Key Features

Parameter	Min	Typical	Max
Frequency		57-66GHz	
Gain	23dB	25dB	
Gain Flatness		+/-2dB	
P1dB		+25dBm	
Psat	+25dBm	+26dBm	
Drain Supply		+5V	+6V
Current/Quiscent		1.4A	
IDD Psat		1.55A	1.8A
Input Return Loss		-10dB	
Output Return Loss		-7dB	
Spec Temp		25C	





# AT-PA-5766-2526VG-18F18F

57-66GHz Power Amplifier

## Mechanical Information

Item	Description
Input Port	1.85mm Female
Output Port	1.85mm Female
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	150g
Size:	60X45X14mm

## Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+24V
RF Input Power	+15 dBm
Operating Temperature	-20 to +70C
Storage Temperature	-66 to +150C


### Caution:

Please pay attention to the case temperature. If case temperature exceed higher than +50C, heat sink and fan are required, or the amplifier may be damaged.

### Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.






# AT-PA-5766-2526VG-18F18F


57-66GHz Power Amplifier

## Dimension: (unit mm)

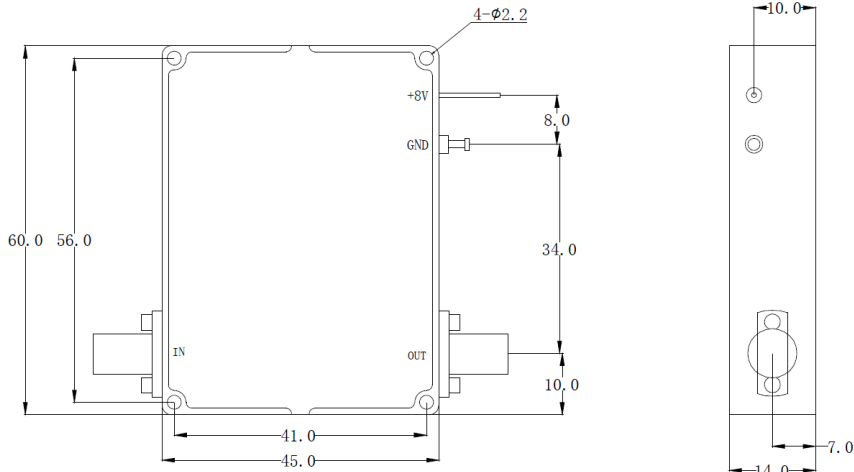

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

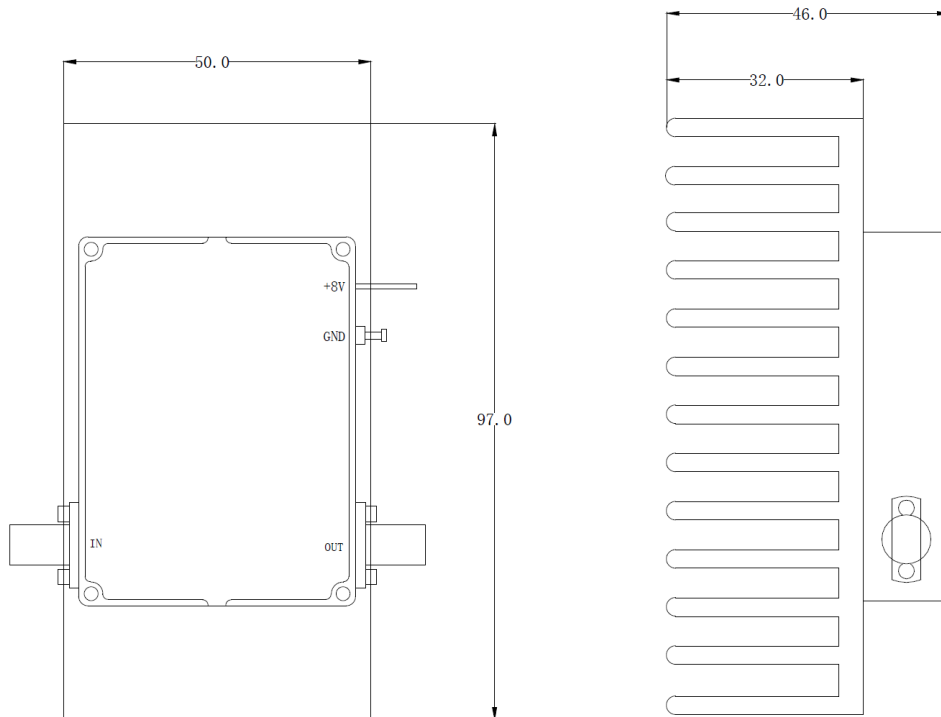

Including a small heatsink without Fan if output Power higher than +20dBm.

Customers can removed it or use their own heatsink according to actual situation.

**Heat Sink Required During Operation if case Temp higher than 50C**

