

AT-PD2-0118

1-18GHz Broadband Wilkinson Power Divider

Broadband Wilkinson Power Divider 1-18GHz, SMA Female

2022-7-11

Product Overview

AT Microwave offers high performance and broadband power divider from DC-67GHz, with SMA, 2.92mm, 2.4mm and 1.85mm connectors.



Based on our excellent design work, precise machine tolerance and outstanding quality plating, we can provide band pass filter with low insertion loss, good return loss and high rejection at the same time.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Broadband Performance
- ✓ Low Insertion Loss
- ✓ Good Amplitude and Phase balance
- ✓ Good Return Loss

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency Range		1-18GHz	
Normal Power Splitting		3 dB	
Normal Phase Shift		0 Degree	
Insertion Loss		-0.8dB	-1.2dB
Amplitude Balance		+/-0.5dB	+/-0.8dB
Phase Balance		+/-3 Degree	+/-6 Degree
VSWR		1.5	1.8
Isolation	16dB	20dB	
CW Power			30W Forward 1W Reverse
Peak Power			200W
Spec Temp		25C	


Shanghai AT Microwave Limited

Tel:021-6229 1233

Email:sales@atmicrowave.com

www.atmicrowave.com





AT-PD2-0118

1-18GHz Broadband Wilkinson Power Divider

Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	SMA Female
Case Material	Aluminum
Finish	Painted
Weight	180g
Size:	See outline

Absolute Maximum Ratings Table

Parameter	Value
RF Input Power CW	30W Forward, 1W Reverse
Operating Temperature	-40 to + 85C
Storage Temperature	-55 to +125C


Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

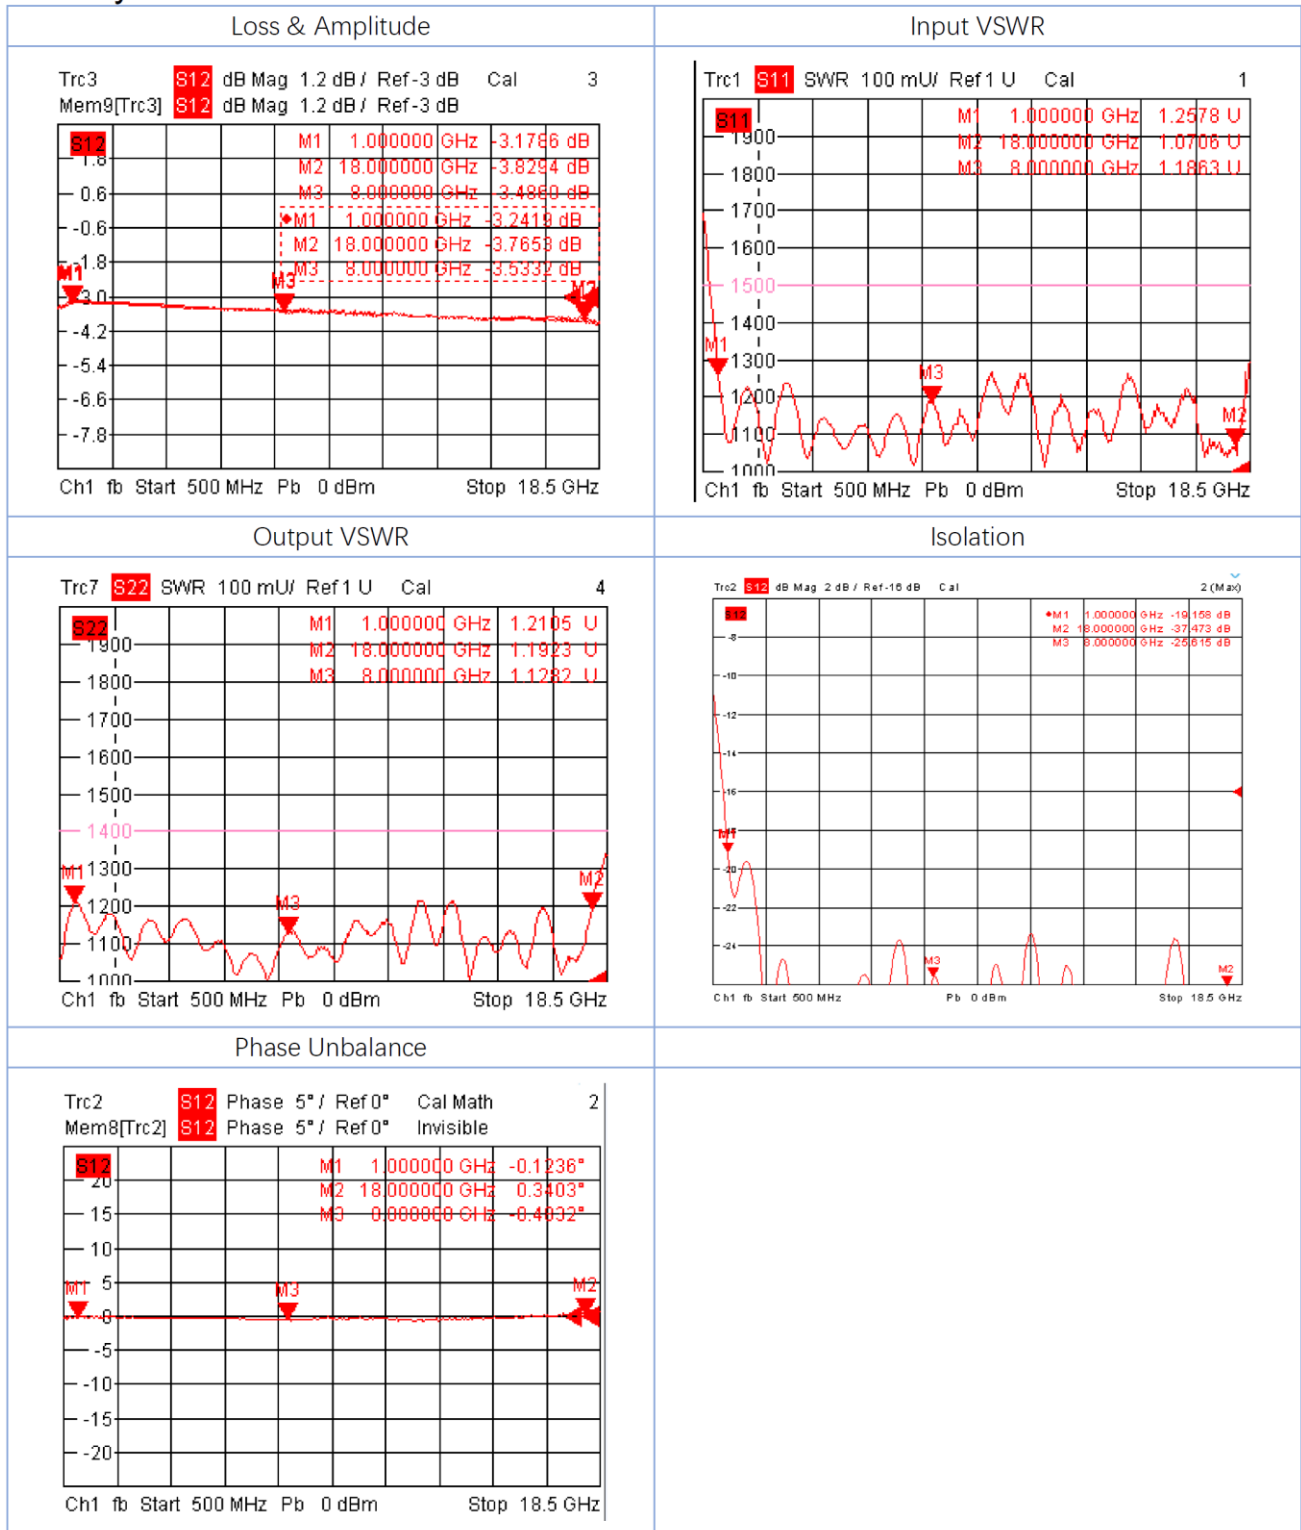

Dimension: (unit in mm)

