

### Rugged Straight Waveguide, 2.0inch Full E Band, 60-90GHz, WR-12

2023-5-5



#### Product Overview

AT Microwave provides rugged straight waveguide with high performance. RSW series Flanges are anti-cocking design for high precision test application.

AT Microwave offers straight waveguide covering 33-325GHz, with waveguide port from WR-22 to WR-03.

More information, please visit [www.atmicrowave.com](http://www.atmicrowave.com)

#### Advantages

- ✓ Rugged Application
- ✓ Low Insertion Loss
- ✓ Anti-cocking Design
- ✓ Low Cost, Fast Delivery

#### Application

- ✓ Labs Test
- ✓ Radar System
- ✓ High Performance Application

#### Key Features

Parameter	Min	Typical	Max
Passband Frequency	60GHz		90GHz
VSWR		1.15	
Length (note)		2.0inch	


Note: Length can be customized according to request.

#### Mechanical Information

Item	Description
Input Port	WR-12, UG-387/U Flange with anti-cocking Flange
Output Port	WR-12, UG-387/U Flange with anti-cocking Flange
Case Material	Copper
Finish	Gold Plated
Weight	35g



### Dimension (unit mm)

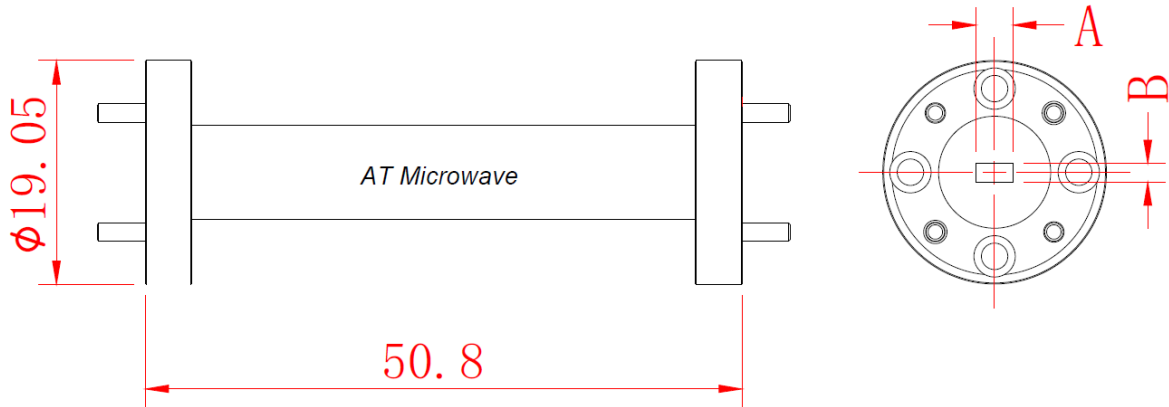

Dimentions(mm)		
Waveguide	-A-	-B-
WR-15	3.76	1.88
WR-12	3.10	1.55
WR-10	2.54	1.27
WR-08	2.03	1.02
WR-06	1.65	0.83
WR-05	1.30	0.65
WR-04	1.09	0.55
WR-03	0.86	0.43

