

# -----AT Microwave-----

## 50 Ohms Termination, 2.4mm

## AT-T50-24X

### Feature

- 2.4mm Termination
- Specified DC-50GHz
- Excellent Broadband VSWR



### Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Specs
Frequency	DC-50GHz
VSWR	1.35 Max
Power	1W CW
Impedance	50 Ohms
Operating Temp	-50 to +85C

### Environmental

- 55 C to +125 C
- Corrosion: MIL-STD 202
- Vibration: MIL-STD 202

### Materials

- Body: SU304 Polished & Passivated
- Center Contact: Beryllium Copper Gold Plated
- Insulators: PEI


### Mechanical

1000 Cycles Min

### Order Information

Connector #1	Connector #2	Part Number
1	2.4mm Male	AT-T50-24M
2	2.4mm Female	AT-T50-24F

### Dimension

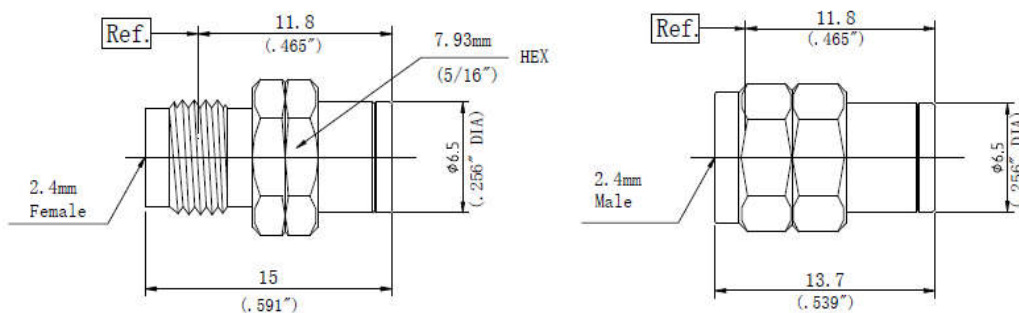

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063

Tel:+8621-5291 8556 Email:sales@atmicrowave.com www.atmicrowave.com