

-----AT Microwave-----

50 Ohms Termination, 2.92mm

AT-T50-29X

Feature

- 2.92mm Termination
- Specified DC-40GHz
- Low Insertion Loss
- Excellent Broadband VSWR



Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Specs
Frequency	DC-40GHz
VSWR	1.25 Max
Power	1W CW
Impedance	50 Ohms
Operating Temp	-50 to +85C

Environmental

- 55 C to +125 C
- Corrosion: MIL-STD 202
- Vibration: MIL-STD 202

Materials

- Body: SU304 Polished & Passivated
- Center Contact: Beryllium Copper Gold Plated
- Insulators: PEI


Mechanical

1000 Cycles Min

Order Information

Connector #1	Connector #2	Part Number
1	2.92mm Male	AT-T50-29M
2	2.92mm Female	AT-T50-29F

Dimension

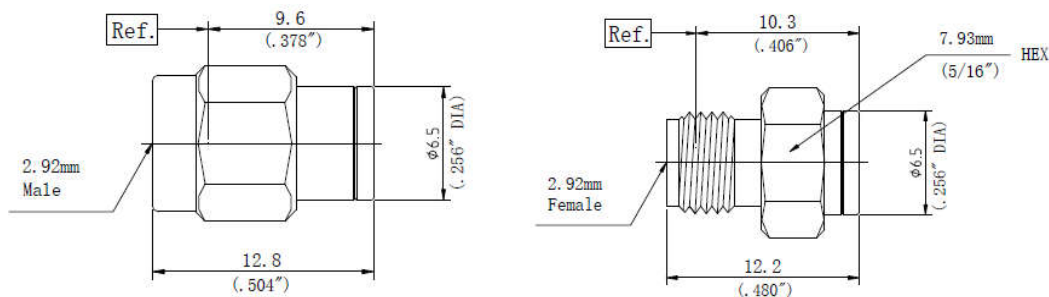

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063

Tel:+8621-5291 8556 Email:sales@atmicrowave.com www.atmicrowave.com