

20-50GHz Voltage Variable Attenuator



Description:

AT-VVA-2050-35A is a MMIC Based attenuator covering 20-50GHz. It also can be used as a SPST switch. This module offers a low insertion loss of -5 dB with typical isolation of -35dBc.

It also has good return loss from 20-50GHz band in both ON and OFF state. The input and output connectors are 2.4mm Female. Other connectors can be provided according to request.

More information, visit www.atmicrowave.com

Feature

- ✓ Frequency: 20-50GHz
- ✓ Low insertion Loss, -5 dB
- ✓ Attenuation Range: 35dB
- ✓ Very fast speed


Application

- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System
- ✓ Telecom Communication

Electronical Specifications:

Parameter	Min	Typical	Max
Frequency Range		20-50GHz	
Insertion Loss		-5dB	-8
Attenuation Range		35 dB	
Control Voltage	-4V		0V
Current		5mA	
Input Return Loss		-10dB	
Output Return Loss		-10dB	
Spec Temp		25C	





AT-VVA-2050-35A

20-50GHz Voltage Variable Attenuator

Mechanical Information

Item	Description
Input Port	2.4mm Female
Output Port	2.4mm Female
Case Material	Copper
Finish	Nickel Plated
Weight (Without Heatsink)	80g
Size:	27.9x26x12.3 mm


Absolute Maximum Ratings Table

Parameter	Value
Control Voltage	-6 to 0.3V
RF Input Power	+30dBm
Operating Temperature	-40 to +85C
Storage Temperature	-65 to +150C

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.






AT-VVA-2050-35A


20-50GHz Voltage Variable Attenuator

Test Data

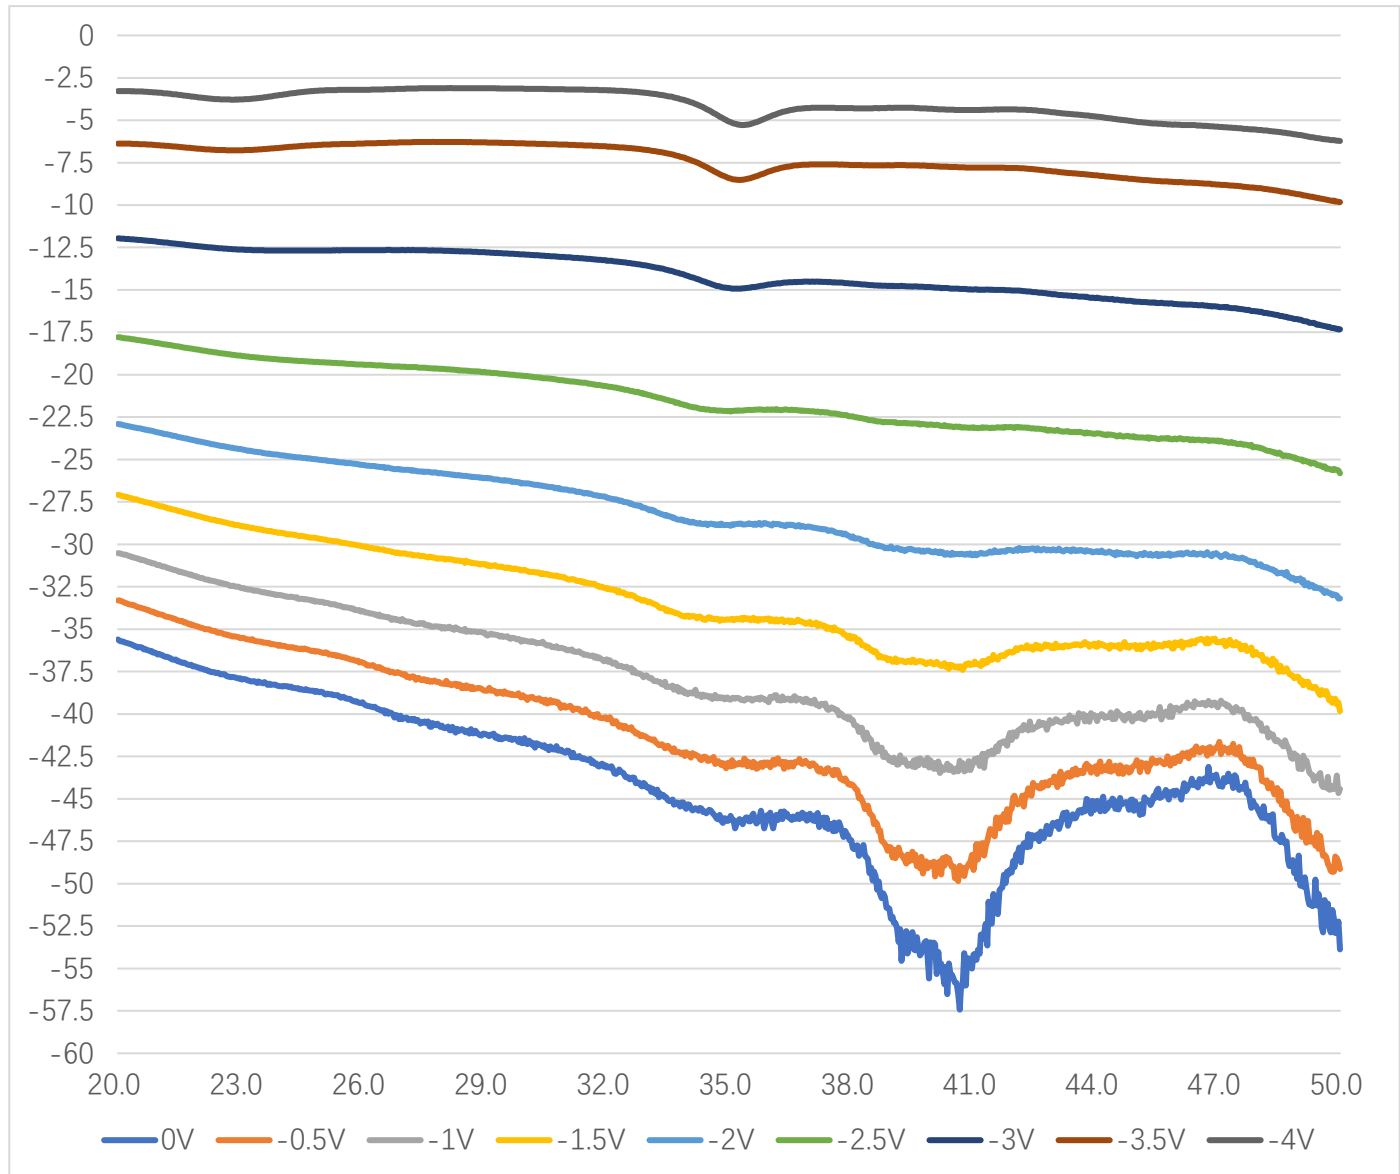


Attenuation vs Voltage Control






AT-VVA-2050-35A

20-50GHz Voltage Variable Attenuator

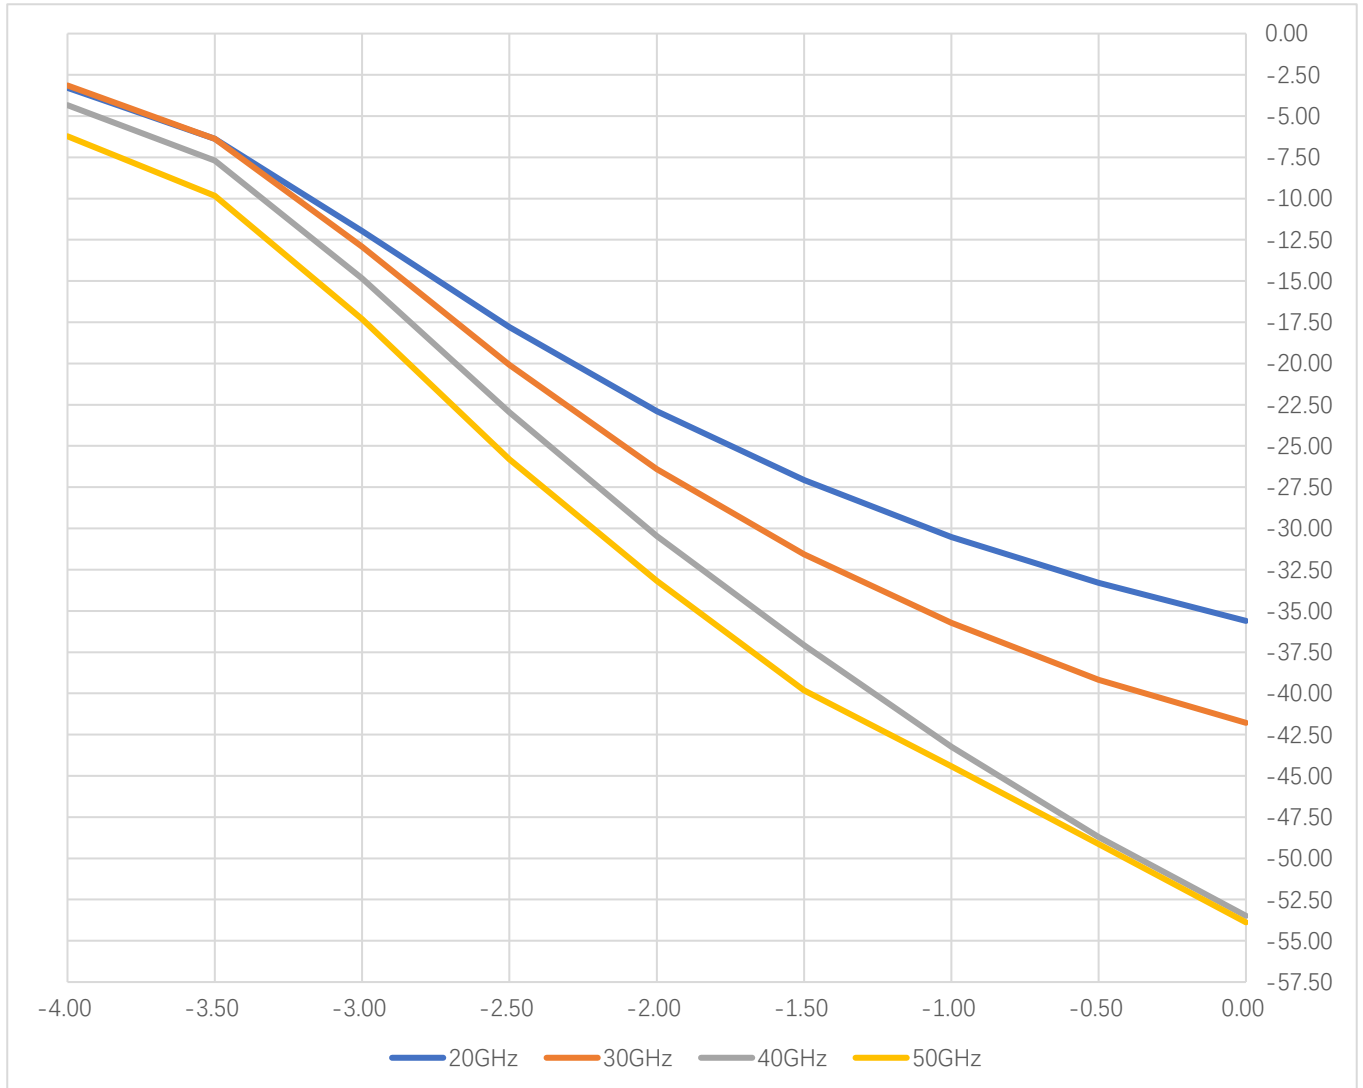


Attenuation vs Voltage at 20/30/40GHz



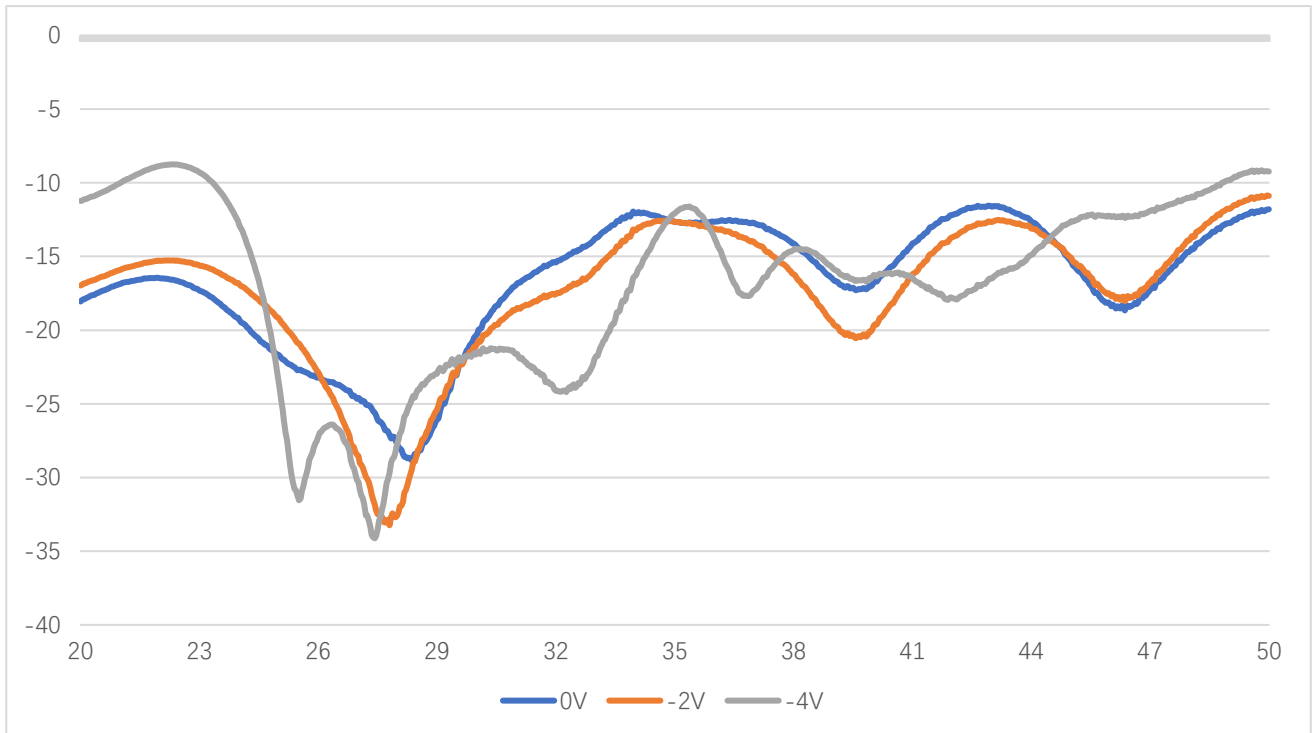


S11 Return Loss at 0/-2/-4V Control Voltage

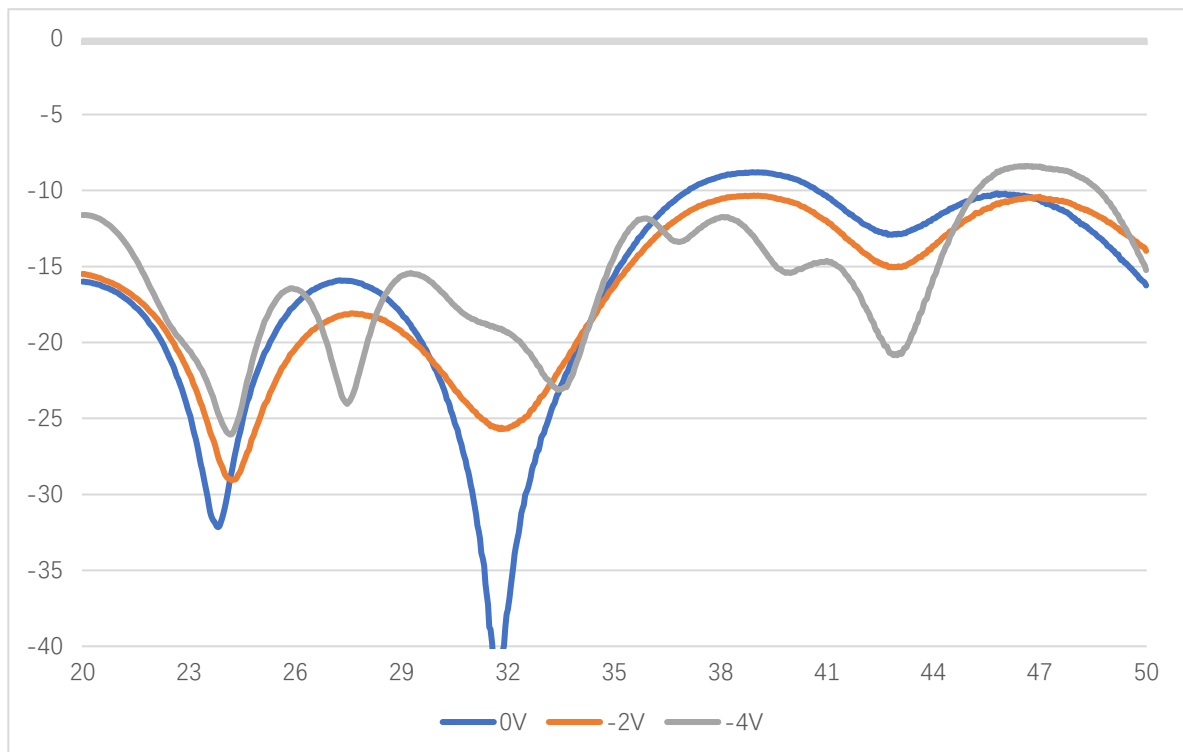

S22 Return Loss at 0/-2/-4V Control Voltage





AT-VVA-2050-35A

20-50GHz Voltage Variable Attenuator

Dimension (mm)

