


## 16 Ways Wilkinson Power Divider/Combiner

### AT-PD16-0618

REV A

#### Feature

- 6-18 GHz Broadband
- Low Insertion Loss
- Outstanding Phase and Amplitude Balance

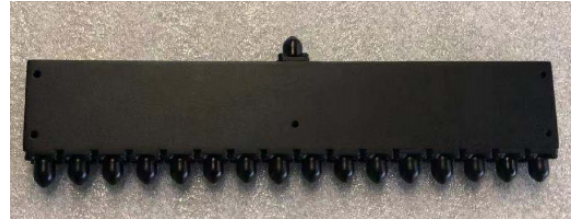

#### Electrical Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Frequency Range(GHz )	Min	Typ	Max	Unit	
Normal Power Splitting	6-26.5GHz		12		dB	
Normal Phase Shift			0		Degree	
Amplitude Balance			+/-0.4		dB	
Phase Balance			+/- 6		Degree	
Insertion Loss				3.5		dB
VSWR				1.5		
Isolation				17		dB
CW Peak				20		W
Peak Power				3000		W
Weight				390		g
Dimension(L/W/H)			44.5x210x12.7			mm


#### Order Information

Part Number	Description
AT-PD16-0618	16 Ways 6-18GHz Power Divider With SMA Female Connectors

Consult factory for other connectors option

#### Dimension

Unit: mm/Degree

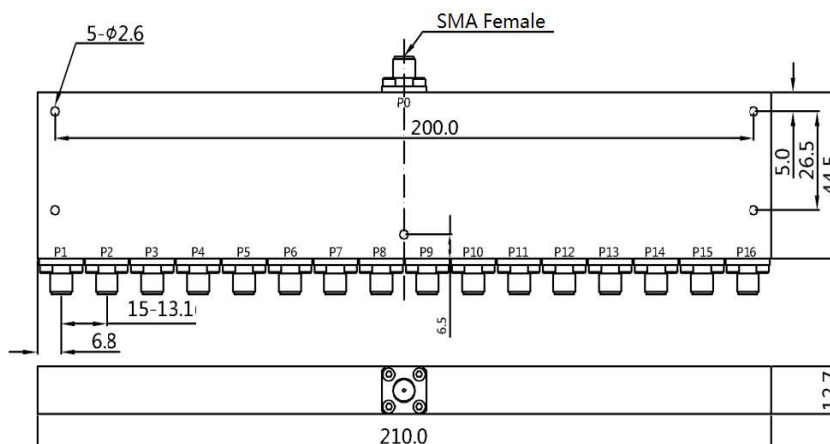

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063

Tel:+8621-6229 1233 Email:sales@atmicrowave.com www.atmicrowave.com