

6Ways Wilkinson Power Divider/Combiner

AT-PD6-0618

REV A

Feature

- 6-18 GHz Broadband
- Low Insertion Loss
- Outstanding Phase and Amplitude Balance

Electrical Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Frequency Range(GHz)	Min	Typ	Max	Unit	
Normal Power Splitting	6-18GHz		8		dB	
Normal Phase Shift			0		Degree	
Amplitude Balance			+/-0.5		dB	
Phase Balance			+/- 6		Degree	
Insertion Loss				1.4		dB
VSWR				1.5		
Isolation				18		dB
CW Peak				20		W
Peak Power				3000		W
Weight				210		g
Dimension(L/W/H)			47.5x88.9x12.7			mm


Order Information

Part Number	Description
AT-PD6-0618	6Ways 6-18GHz Power Divider With SMA Female Connectors

Consult factory for other connectors option

Dimension

Unit: mm/Degree

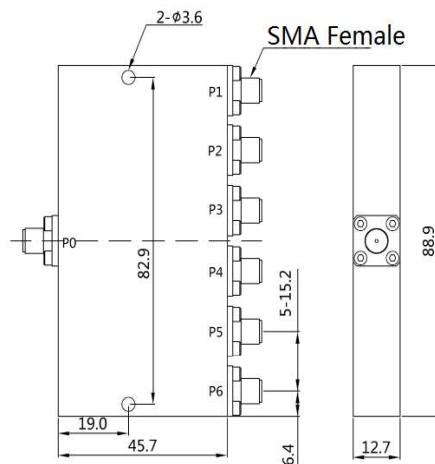

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063

Tel:+8621-6229 1233 Email:sales@atmicrowave.com www.atmicrowave.com