

# Broadband Wilkinson Power Divider

## 0.5-6GHz, SMA Female

2022-7-11



### Product Overview

AT Microwave offers high performance and broadband power divider from DC-67GHz, with SMA, SMA, 2,4mm and 1.85mm connectors.

Based on our excellent design work, precise machine tolerance and outstanding quality plating, we can provide band pass filter with low insertion loss, good return loss and high rejection at the same time.

More information, please visit [www.atmicrowave.com](http://www.atmicrowave.com)

### Advantages

- ✓ Broadband Performance
- ✓ Low Insertion Loss
- ✓ Good Amplitude and Phase balance
- ✓ Good Return Loss

### Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

### Key Features

Parameter	Min	Typical	Max
Frequency Range		0.5-6GHz	
Normal Power Splitting		6dB	
Normal Phase Shift		0 Degree	
Insertion Loss		-2.0dB	-2.5dB
Amplitude Balance		+/-0.3dB	+/-1.0dB
Phase Balance		+/-3 Degree	+/-5 Degree
VSWR		1.5	1.8
Isolation	15dB	20dB	
CW Power Forward			30W
CW Power Reverse			2W
Spec Temp		25C	





# AT-PD4-0R506

0.5-6GHz Broadband Wilkinson Power Divider

## Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	SMA Female
Case Material	Aluminum
Finish	Painted
Weight	180g
Size:	See outline

## Absolute Maximum Ratings Table

Parameter	Value
RF Input Power CW Forward	30W
RF Input Power CW Reverse	2W
Operating Temperature	-40 to + 85C
Storage Temperature	-55 to +125C


## Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



### Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

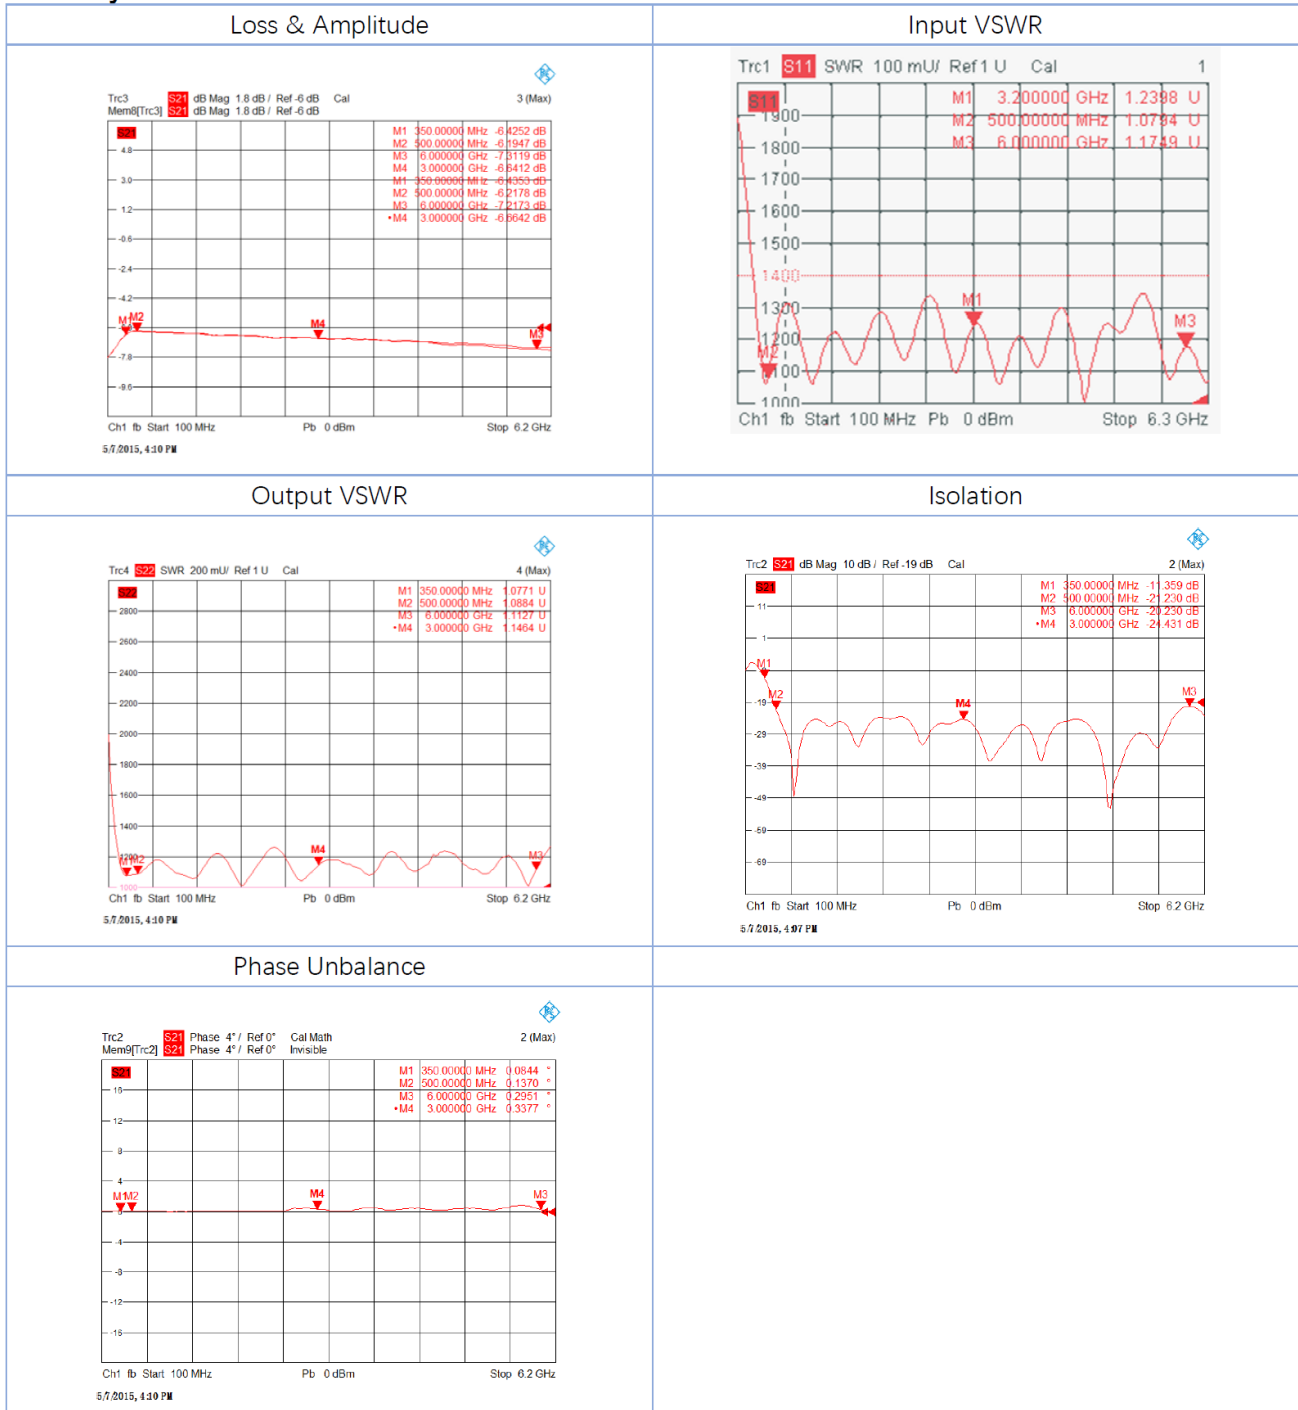

**Dimension:** (unit in mm)

